# TOWN OF NORTH CANAAN HAZARD MITIGATION PLAN

2014

MMI #3843-04

# Prepared for the:

Town of North Canaan, Connecticut North Canaan Town Hall 100 Pease Street North Canaan, Connecticut 06018 (860) 824-7313 www.northcanaan.org

# Prepared by:

MILONE & MACBROOM, INC. 99 Realty Drive Cheshire, Connecticut 06410 (203) 271-1773 www.miloneandmacbroom.com

The preparation of this report has been financed in part through funds provided by the Connecticut Department of Emergency Services and Public Protection (DESPP) Division of Emergency Management and Homeland Security (DEMHS) under a grant from the Federal Emergency Management Agency. The contents of this report reflect the views of the Town of North Canaan and do not necessarily reflect the official views of DEMHS. The report does not constitute a specification or regulation.

# **ACKNOWLEDGEMENTS AND CONTACT INFORMATION**

This plan was prepared under the direction of the Town of North Canaan. The following individual should be contacted with questions or comments regarding the plan:

Mr. Douglas Humes, Jr. First Selectman Town of North Canaan 100 Pease Street North Canaan, CT 06018 (860) 824-7313

This Natural Hazard Mitigation Plan could not have been completed without the time and dedication of the additional individuals at the local level:

Mr. Bryon Carlson, Highway Department Mr. Dinnie Light, Highway Department

The consulting firm of Milone & MacBroom, Inc. (MMI) prepared the subject plan. The following individuals at MMI may be with questions or comments regarding the plan prior to plan adoption using the contact information on the title page or the electronic mail addresses below:

Mr. David Murphy, P.E., CFM Associate davem@miloneandmacbroom.com

# TABLE OF CONTENTS

		<u>Page</u>
	EXECUTIVE SUMMARY	ES-1
1.0	INTRODUCTION	
1.1	Background and Purpose	1-1
1.2	Hazard Mitigation Goals	1-4
1.3	Identification of Hazards and Document Overview	1-5
1.4	Discussion of STAPLEE Ranking Method	
1.5	Discussion of Benefit-Cost Ratio	
1.6	Documentation of the Planning Process	1-10
1.7	Coordination with Neighboring Communities	1-17
2.0	COMMUNITY PROFILE	
2.1	Physical Setting	
2.2	Existing Land Use	
2.3	Geology	2-4
2.4	Current Climate Conditions and Climate Change	
2.5	Drainage Basins and Hydrology	2-8
2.6	Population and Demographic Setting	2-10
2.7	Governmental Structure and Capabilities	2-11
2.8	Development Trends	
2.9	Critical Facilities, Sheltering Capabilities, and Emergency Response Capabilities	2-12
3.0	FLOODING	
3.1	Setting	
3.2	Hazard Assessment	
3.3	Historic Record	3-5
3.4	Existing Capabilities	3-6
3.5	Vulnerabilities and Risk Assessment	3-11
3.6	Potential Mitigation Strategies and Actions	3-13
3.7	Summary of Specific Strategies and Actions	3-19
4.0	HURRICANES AND TROPICAL STORMS	
4.1	Setting	
4.2	Hazard Assessment	
4.3	Historic Record	
4.4	Existing Capabilities	
4.5	Vulnerabilities and Risk Assessment	
4.6	Potential Mitigation Strategies and Actions	
4.7	Summary of Specific Strategies and Actions	4-14

# **TABLE OF CONTENTS (Continued)**

		<u>Page</u>
5.0	SUMMER STORMS AND TORNADOES	
5.1	Setting	
5.2	Hazard Assessment	5-1
5.3	Historic Record	5-5
5.4	Existing Capabilities	5-7
5.5	Vulnerabilities and Risk Assessment	5-8
5.6	Potential Mitigation Strategies and Actions	5-9
5.7	Summary of Specific Strategies and Actions	5-10
6.0	WINTER STORMS	
6.1	Setting	
6.2	Hazard Assessment	
6.3	Historic Record	
6.4	Existing Capabilities	6-7
6.5	Vulnerabilities and Risk Assessment	
6.6	Potential Mitigation Strategies and Actions	
6.7	Summary of Specific Strategies and Actions	6-11
7.0	EARTHQUAKES	
7.1	Setting	7-1
7.2	Hazard Assessment	7-1
7.3	Historic Record	7-2
7.4	Existing Capabilities	7-4
7.5	Vulnerabilities and Risk Assessment	7-4
7.6	Potential Mitigation Strategies and Actions	7-10
7.7	Summary of Specific Strategies and Actions	7-10
8.0	DAM FAILURE	
8.1	Setting	
8.2	Hazard Assessment	8-1
8.3	Historic Record	8-3
8.4	Existing Capabilities	8-4
8.5	Vulnerabilities and Risk Assessment	
8.6	Potential Mitigation Strategies and Actions	8-6
8.7	Summary of Specific Strategies and Actions	8-6
9.0	WILDFIRES	
9.1	Setting	9-1
9.2	Hazard Assessment	9-1
9.3	Historic Record	9-2
9.4	Existing Capabilities	9-3

# **TABLE OF CONTENTS (Continued)**

		<u>Page</u>
9.5	Vulnerabilities and Risk Assessment	9-5
9.6	Potential Mitigation Strategies and Actions	
9.7	Summary of Specific Strategies and Actions	
10.0	HAZARD MITIGATION STRATEGIES AND ACTIONS	
10.1	Additional Strategies and Actions	10-1
10.2	Summary of Specific Strategies and Actions	
10.3	Priority Strategies and Actions	
10.4	Sources of Funding	
11.0	PLAN IMPLEMENTATION	
11.1	Implementation Strategy and Schedule	11-1
11.2	Progress Monitoring and Public Participation	
11.3	Updating the Plan	
11.4	Technical and Financial Resources	
12.0	REFERENCES	12-1
	<u>TABLES</u>	
Table 1	1-1 Eligible Mitigation Project Activities by Program	1-3
Table 1	1-2 Hazard Event Ranking	1-6
Table 1	1-3 Hazard Effect Ranking	1-7
Table 1		
Table 1		
Table 1	J 1	
Table 1		
Table 1		
Table 1	$\mathcal{I}$	
Table 1	$\mathcal{E}$	
Table 2		
Table 2		
Table 2		
Table 3	1	
Table 3		
Table 3		
Table 3	$\mathcal{E}$	
Table 4		
Table 4		
Table 4		
Table 4	e e	
Table 4	,	
Table 4	4-6 <i>HAZUS-MH</i> Hurricane Scenarios – Debris Generation (Tons)	4-11

Table 4-7	HAZUS Hurricane Scenarios – Economic Losses	4-11
Table 5-1	Fujita Scale	5-3
Table 5-2	Enhanced Fujita (EF) Scale	5-4
Table 5-3	Tornado Events Near North Canaan From 1648 to July 2012	5-6
Table 5-4	NOAA Weather Watches	5-7
Table 5-5	NOAA Weather Warnings	5-7
Table 6-1	RSI Categories	6-2
Table 6-2	Reported Roof Collapse Damage, 2011	
Table 7-1	Comparison of Earthquake Magnitude and Intensity	7-1
Table 7-2	Probability of a Damaging Earthquake in the Vicinity of North Canaan	
Table 7-3	HAZUS-MH Earthquake Scenarios – Number of Residential Buildings Damaged	7-6
Table 7-4	HAZUS-MH Earthquake Scenarios – Total Number of Buildings Damaged	
Table 7-5	HAZUS-MH Earthquake Scenarios – Essential Facility Damage	7-7
Table 7-6	HAZUS-MH Earthquake Scenarios – Utility, Infrastructure, and Fire Damage	7-8
Table 7-7	HAZUS-MH Earthquake Scenarios – Shelter Requirements	7-8
Table 7-8	HAZUS-MH Earthquake Scenarios – Casualty Estimates	7-9
Table 7-9	HAZUS-MH Estimated Direct Losses From Earthquake Scenarios	7-9
Table 8-1	High Hazard Dams with the Potential to Affect North Canaan	8-3
Table 8-2	Dams Damaged Due to Flooding From October 2005 Storms	8-3
Table 9-1	Wildland Fire Statistics for Connecticut	
Table 11-1	Schedule for Hazard Mitigation Plan	11-3
	<u>FIGURES</u>	
Figure 2-1	North Canaan Location Map	2-2
Figure 2-2	North Canaan in the NWCCOG Map	
Figure 2-3	Bedrock Geology	
Figure 2-4	Surficial Geology	
Figure 2-5	Subregional Drainage Basins	
Figure 3-1	Overview of FEMA Special Flood Hazard Areas	
Figure 4-1	Historical Hurricane Storm Tracks	4-9
Figure 5-1	Anatomy of a Tornado	5-2
Figure 8-1	Dam Location and Hazard Classification	8-2
	APPENDICES	
	MILMULED	
Appendix A	STAPLEE Matrix	
Appendix B	Record of Municipal Adoption	
Appendix C	Mitigation Project Status Worksheet	A-6
Appendix D	Documentation of Plan Development	
Appendix E	HAZUS Documentation	
Annendix F	FFMA Snow Load Guidance	A - 250

# **LIST OF ACRONYMS**

AEL Annualized Earthquake Losses

ARC American Red Cross

ASFPM Association of State Floodplain Managers

BCA Benefit Cost Analysis BCR Benefit-Cost Ratio BFE Base Flood Elevation

BOCA Building Officials and Code Administrators

CLEAR Center for Land Use Education and Research (University of Connecticut)

CM Centimeter

CRS Community Rating System

DEEP Department of Energy & Environmental Protection

DEMHS Department of Emergency Management and Homeland Security

DFA Dam Failure Analysis

DMA Disaster Mitigation Act

DOT Department of Transportation

DPW Department of Public Works

EAP Emergency Action Plan

ECC Emergency Communications Center EOC Emergency Operations Center EOP Emergency Operations Plan

FEMA Federal Emergency Management Agency

FIRM Flood Insurance Rate Map
FIS Flood Insurance Study
FMA Flood Mitigation Assistance
GIS Geographic Information System
HMA Hazard Mitigation Assistance
HMGP Hazard Mitigation Grant Program

HMP Hazard Mitigation Plan

HURDAT Hurricane Database (NOAA's)

HURISK Hurricane Center Risk Analysis Program

ICC International Code Council

IPCC Intergovernmental Panel on Climate Change

KM Kilometer KT Knot

LID Low Impact Development LOMC Letter of Map Change

MM Millimeter

MMI Milone & MacBroom, Inc.

MPH Miles per Hour NAI No Adverse Impact

NCDC National Climatic Data Center

TC-v

# **LIST OF ACRONYMS (Continued)**

NFIA National Flood Insurance Act
NFIP National Flood Insurance Program
NFIRA National Flood Insurance Reform Act

NOAA The National Oceanic and Atmospheric Administration

OPM Office of Policy and Management
POCD Plan of Conservation and Development

PDM Pre-Disaster Mitigation
RFC Repetitive Flood Claims
RLP Repetitive Loss Property
RSI Regional Snowfall Impact

SCCOG Southeastern Connecticut Council of Governments

SFHA Special Flood Hazard Area

SLOSH Sea, Lake and Overland Surges from Hurricanes

SRL Severe Repetitive Loss SSURGO Soil Survey Geographic

STAPLEE Social, Technical, Administrative, Political, Legal, Economic, and Environmental

TC-vi

TNC The Nature Conservancy USD United States Dollars

USDA United States Department of Agriculture

USGS United States Geological Survey

#### **EXECUTIVE SUMMARY**

The Town of North Canaan has developed the subject hazard mitigation plan along with eight other communities in northwestern Connecticut through a grant to the Northwestern Connecticut Council of Governments (NWCCOG¹). Although each of the nine towns developed a single-jurisdiction plan, certain components of the planning process were shared throughout the nine-town regional planning area.

North Canaan is a rural town of almost 3,350 people situated in northern Litchfield County. The principle communities include the Village of Canaan, Canaan Valley, East Canaan and Sodom. The primary goal of this hazard mitigation plan is to prevent loss of life, reduce the damage to property, infrastructure, and natural, cultural and economic resources from natural disasters.

Like other communities in Connecticut, North Canaan has been impacted by recent disasters such as the winter storms of January 2011, Tropical Storm Irene of August 2011, and Winter Storm Alfred of October 2011:

The snow storms of January 2011 necessitated the need for snow removal from several municipal
buildings to prevent collapses.
Rainfall from Tropical Storm Irene was significant, and caused flooding of several roads and homes
After Winter Storm Alfred, the town's public works crews helped clear state and town roads in order
to restore access for residents and facilitate recover operations of the local utility company.

These storms have tested the resilience of North Canaan, demonstrating that the town has considerable capacity to recover from storms.

Development pressures are minimal in North Canaan, as the town continues to maintain a rural character. However, commercial uses are expected to be developed primarily in or adjacent to the existing downtown area in the Village of Canaan.

North Canaan remains primarily at risk to winter storms and floods. The town's capabilities relative to winter storms are significant, as the town is located in a part of the state that is accustomed to snowfall. However, municipal officials are concerned with flood risks along Camp Brook and to a lesser extent the Housatonic and Blackberry Rivers. The town is interested in pursuing long-term solutions to mitigate some of these risks such as increasing bridge and culvert capacities.

North Canaan has identified a number of mitigation strategies to decrease risks from future floods, wind events, snow storms, wildfires, and earthquakes. A table of hazard mitigation strategies and actions is provided in Appendix A. The record of municipal adoption for this plan is provided in Appendix B. Appendix C contains a worksheet to be used by the town for annually documenting the status of potential mitigation actions. The remaining appendices include documentation of the planning process and other resources.

\_

<sup>&</sup>lt;sup>1</sup> Subsequent to the commencement of the planning process, NWCCOG merged with the former Litchfield Hills Council of Elected Officials to form a 20-town regional planning organization known as the Northwest Hills Council of Governments.



ES-2

TOWN OF NORTH CANAAN HAZARD MITIGATION PLAN NORTH CANAAN, CONNECTICUT DECEMBER 2014

# 1.0 INTRODUCTION

# 1.1 Background and Purpose

The goal of emergency management activities is to prevent loss of life and property. The four phases of emergency management include Mitigation, Preparedness, Response and Recovery. Mitigation differs from the remaining three phases in that hazard mitigation is performed with the goal to eliminate or reduce the need to respond. The term *hazard* refers to an extreme natural event that poses a risk to people, infrastructure, or resources. In the context of disasters, predisaster hazard mitigation is commonly defined as any sustained action that reduces or eliminates long-term risk to people, property, and resources from hazards and their effects.

The primary purpose of a hazard mitigation plan (HMP) is to identify hazards and risks, existing capabilities, and activities that can be undertaken by a community or group of communities to prevent loss of life and reduce property damages associated with the identified hazards. Public safety and property loss reduction are the driving forces behind this plan. However, careful consideration also must be given to the preservation of history, culture and the natural environment of the region.

This HMP is prepared specifically to identify hazards in the town of North Canaan, Connecticut. The HMP is relevant not only in emergency management situations but also should be used within the Town's land use, environmental, and capital improvement frameworks.

The Disaster Mitigation Act of 2000 (DMA), commonly known as the 2000 Stafford Act amendments, was approved by Congress and signed into law in October 2000, creating Public Law 106-390. The purposes of the DMA are to establish a national program for predisaster mitigation and streamline administration of disaster relief. The DMA requires local communities to have a FEMA-approved mitigation plan in order to be eligible to apply for and receive Hazard Mitigation Assistance (HMA) grants.

The HMA "umbrella" contains several competitive grant programs designed to mitigate the impacts of natural hazards. This HMP was developed to be consistent with the general requirements of the HMA program as well as the specific requirements of the Hazard Mitigation Grant Program (HMGP) for post-disaster mitigation activities, as well



as the Pre-Disaster Mitigation (PDM), Flood Mitigation Assistance (FMA) programs. These programs are briefly described below.

# Pre-Disaster Mitigation (PDM) Program

The PDM Program was authorized by Part 203 of the Robert T. Stafford Disaster Assistance and Emergency Relief Act (Stafford Act), 42 U.S.C. 5133. The PDM program provides funds to states, territories, tribal governments, communities, and universities for hazard mitigation planning and implementation of mitigation projects prior to disasters, providing an opportunity to reduce the nation's disaster losses through PDM planning and the implementation of feasible, effective, and cost-efficient mitigation measures. Funding of pre-disaster plans and projects is meant to reduce overall risks to populations and facilities. PDM funds should be used primarily to support mitigation activities that address natural hazards. In addition to providing a vehicle for funding, the PDM program provides an opportunity to raise risk awareness within communities.



# Hazard Mitigation Grant Program (HMGP)

The HMGP is authorized under Section 404 of the Robert T. Stafford Disaster Relief and Emergency Assistance Act. The HMGP provides grants to states and local governments to implement long-term hazard mitigation measures after a major disaster declaration. The purpose of the HMGP is to reduce the loss of life and property due to natural disasters and to enable mitigation measures to be implemented during the immediate recovery from a disaster. A key purpose of the HMGP is to ensure that any opportunities to take critical mitigation measures to protect life and property from future disasters are not "lost" during the recovery and reconstruction process following a disaster. The "5% Initiative" is a subprogram that provides the opportunity to fund mitigation actions that are consistent with the goals and objectives of



the state and local mitigation plans and meet all HMGP requirements but for which it may be difficult to conduct a standard benefit-cost analysis (Section 1.5) to prove cost effectiveness. The grant to prepare the subject plan came through the HMGP program.

# Flood Mitigation Assistance (FMA) Program

The FMA program was created as part of the National Flood Insurance Reform Act (NFIRA) of 1994 (42 U.S.C. 4101) with the goal of reducing or eliminating claims under the National Flood Insurance Program (NFIP). FEMA provides FMA funds to assist states and communities with implementing measures that reduce or eliminate the long-term risk of flood damage to buildings, homes, and other structures insurable under the NFIP. The long-term goal of FMA is to reduce or eliminate claims under the NFIP through mitigation activities.



The Biggert-Waters Flood Insurance Reform Act of 2012 eliminated the Repetitive Flood Claims (RFC) and Severe Repetitive Loss (SRL) programs and made the following significant changes to the FMA program:

The definitions of repetitive loss and severe repetitive loss properties have been modified;
Cost-share requirements have changed to allow more Federal funds for properties with
repetitive flood claims and severe repetitive loss properties; and
There is no longer a limit on in-kind contributions for the non-Federal cost share.

The NFIP provides the funding for the FMA program. The PDM and FMA programs are subject to the availability of appropriation funding, as well as any program-specific directive or restriction made with respect to such funds.

One potentially important change to the PDM, HMGP, and FMA programs is that "green open space and riparian area benefits can now be included in the

Effective August 15, 2013, acquisitions and elevations will be considered cost-effective if the project costs are less than \$276,000 and \$175,000, respectively. Structures must be located in Special Flood Hazard Areas (the area of the 1% annual chance flood). The benefit-cost analysis (BCA) will not be required.

project benefit cost ratio (BCR) once the project BCR reaches 0.75 or greater." The inclusion of environmental benefits in the project BCR is limited to acquisition-related activities.

Table 1-1 presents potential mitigation project and planning activities allowed under each FEMA grant program described above as outlined in the most recent HMA Unified Guidance document.

Table 1-1
Eligible Mitigation Project Activities by Program

Eligible Activities	HMGP	PDM	FMA
Property Acquisition and Structure Demolition or Relocation	X	X	X
Structure Elevation	X	X	X
Mitigation Reconstruction			X
Dry Floodproofing of Historic Residential Structures	X	X	X
Dry Floodproofing of Non-residential Structures	X	X	X
Minor Localized Flood Reduction Projects	X	X	X
Structural Retrofitting of Existing Buildings	X	X	
Non-structural Retrofitting of Existing Buildings and Facilities	X	X	X
Safe Room Construction	X	X	
Wind Retrofit for One- and Two-Family Residences	X	X	
Infrastructure Retrofit	X	X	X
Soil Stabilization	X	X	X
Wildfire Mitigation	X	X	
Post-Disaster Code Enforcement	X		
Generators	X	X	
5% Initiative Projects	X		
Advance Assistance	X		

Source: Table 3 – HMA Unified Guidance document

Many of the strategies and actions developed in this plan fall within the above list of eligible activities.

# 1.2 Hazard Mitigation Goals

The primary goal of this HMP is to *reduce the loss of or damage to life, property, infrastructure, and natural, cultural, and economic resources from natural disasters.* This includes the reduction of public and private damage costs. Limiting losses of and damage to life and property will also reduce the social, emotional, and economic disruption associated with a natural disaster.

Developing, adopting, and implementing this HMP is expected to:

- Increase access to and awareness of funding sources for hazard mitigation projects.
   Certain funding sources, such as the PDM program and the HMGP, may be available if the HMP is in place and approved.

   Identify mitigation initiatives to be implemented if and when funding becomes available.
   This HMP will identify a number of mitigation recommendations that can be prioritized and
- □ Connect hazard mitigation planning to other community planning efforts. This HMP can be used to guide North Canaan's development through interdepartmental and intermunicipal coordination.
- ☐ Improve the mechanisms for preand post-disaster decision making efforts. This Plan emphasizes actions that can be taken now to reduce or prevent future disaster damages. If the actions identified in this Plan are implemented, damage from future hazard events can be minimized, thereby easing recovery and reducing the cost of repairs and reconstruction.

acted upon as funding allows.

- ☐ Improve the ability to implement post-disaster recovery projects through development of a list of mitigation alternatives ready to be implemented.
- ☐ Enhance and preserve natural resource systems. Natural

#### Local Plan Development Process

Local governments are the primary decision makers for land use, using land use and planning documents to make decisions along with management measures, zoning, and other regulatory tools. Development of a HMP at the community level is vital if the community is to effectively address natural hazards. While communities cannot prevent disasters from occurring, they can lessen the impacts and associated damages from such disasters. Effective planning improves a community's ability to respond to natural disasters and documents local knowledge on the most efficient and effective ways to reduce losses. The benefits of effective planning include reduced social, economic, and emotional disruption; better access to funding sources for natural hazard mitigation projects; and improving the community's ability to implement recovery projects.

- resources, such as wetlands and floodplains, provide protection against disasters such as floods. Proper planning and protection of natural resources can provide hazard mitigation at substantially reduced costs.
- □ Educate residents and policy makers about hazard risk and vulnerability. Education is an important tool to ensure that people make informed decisions that complement the Town's ability to implement and maintain mitigation strategies.

#### 1.3 **Identification of Hazards and Document Overview**

As stated in Section 1.1, the term *hazard* refers to an extreme natural event that poses a risk to people, infrastructure, or resources. Based on a review of the 2014 Connecticut Natural Hazard Mitigation Plan and correspondence with local officials, the following have been identified as hazards that can potentially affect the town of North Canaan:

	Flooding
⊐	Hurricanes and Tropical Storms
	Summer Storms (including lightning, hail, and
	heavy winds) and Tornadoes
	Winter Storms
	Earthquakes
	Dam Failure
	Wildfires

The only hazard given attention in the 2014 Connecticut Hazard Mitigation Plan Update but not addressed in the North Canaan **Hazard Mitigation Plan is** drought. However, this is the lowest-ranked hazard of those discussed in the state's plan, with a "low" composite risk score for Litchfield County. In addition, the statewide and countywide annual estimated loss (AEL) for this hazard is \$0 in the state plan. Thus, its inclusion was considered unnecessary.

This document has been prepared with the understanding that a single *hazard effect* may be caused by multiple hazard events. For example, flooding may occur as a result of frequent heavy rains, a hurricane, or a winter storm. Thus, Tables 1-2 and 1-3 provide summaries of the hazard events and hazard effects that impact the town of North Canaan and include criteria for characterizing the locations impacted by the hazard, the frequency of occurrence of the hazards, and the magnitude or severity of the hazards.

Notwithstanding their causes, the effects of several hazards are persistent and demand high expenditures from the Town. In order to better identify current vulnerabilities and potential mitigation strategies associated with other hazards, each hazard has been individually discussed in a separate chapter.

This document begins with a general discussion of North Canaan's community profile, including the physical setting, demographics, development trends, governmental structure, and sheltering

dov Exi and	pacity. Next, each chapter of this Plan that is dedicated to a particular hazard event is broken who into six or seven different parts. These are Setting; Hazard Assessment; Historic Record; isting Capabilities; Vulnerabilities and Risk Assessment; and Potential Mitigation Strategies of Actions, and, for chapters with several recommendations, a Summary of Recommendations. ese are described below.
	<b>Setting</b> addresses the general areas that are at risk from the hazard and categorizes the overall effect of each hazard.
	<i>Hazard Assessment</i> describes the specifics of a given hazard, including characteristics and associated effects. Also defined are associated return intervals, probability and risk, and relative magnitude.
	<i>Historic Record</i> is a discussion of past occurrences of the hazard and associated damages when available.

Table 1-2 Hazard Event Ranking

	Location	Frequency of Occurrence	Magnitude/ Severity	
Natural Hazards	1 = small	0 = unlikely	1 = limited	Rank
Naturai Hazarus	2 = medium	1 = possible	2 = significant	Kalik
	3 = large	2 = likely	3 = critical	
		3 = highly likely	4 = catastrophic	
Winter Storms 3		3	2	8
Hurricanes	3	1	3	7
Summer Storms				
and Tornadoes	2	3	2	7
Earthquakes	3	1	2	6
Wildfires	1	2	1	4

Each hazard may have multiple effects; for example, a hurricane causes high winds and flooding.
 Some hazards may have similar effects; for example, hurricanes and earthquakes may cause dam failure.

#### Location

- 1 = small: isolated to specific area during one event
- 2 = medium: multiple areas during one event
- 3 =large: significant portion of the town during one event

# Frequency of Occurrence

- 0 = unlikely: less than 1% probability in the next 100 years
- 1 = possible: between 1 and 10% probability in the next year; or at least one chance in next 100 years
- 2 = likely: between 10 and 100% probability in the next year; or at least one chance in next 10 years
- 3 = highly likely: near 100% probability in the next year

#### Magnitude/Severity

- 1 = limited: injuries and/or illnesses are treatable with first aid; minor "quality of life" loss; shutdown of critical facilities and services for 24 hours or less; property severely damaged < 10%
- 2 = significant: injuries and/or illnesses do not result in permanent disability; shutdown of several critical facilities for more than one week; property severely damaged <25% and >10%
- 3 = critical: injuries and/or illnesses result in permanent disability; complete shutdown of critical facilities for at least two weeks; property severely damaged <50% and >25%
- 4 = catastrophic: multiple deaths; complete shutdown of facilities for 30 days or more; property severely damaged >50%

Table 1-3 Hazard Effect Ranking

	Location	Frequency of Occurrence	Magnitude/ Severity	
Natural Hazard Effects	1 = small 2 = medium	0 = unlikely 1 = possible	1 = limited 2 = significant	Rank
	3 = large	2 = likely	3 = critical	
	_	3 = highly likely	4 = catastrophic	
Nor'Easter Winds	3	3	2	8
Snow	3	3	2	8
Blizzard	3	3	2	8
Hurricane Winds	3	1	3	7
Ice	3	2	2	7
Falling Trees/Branches	2	3	2	7
Thunderstorm and Tornado Winds	2	2	2	6
Flooding from Dam Failure	1	1	4	6
Riverine Flooding	2	3	1	6
Shaking	3	1	2	6
Flooding from Poor Drainage	1	3	1	5
Lightning	1	3	1	5
Hail	1	2	1	4
Fire/Heat	1	2	1	4
Smoke	1	2	1	4

- ☐ Some effects may have a common cause; for example, a hurricane causes high winds and flooding.
- □ Some effects may have similar causes; for example, hurricanes and nor'easters both cause heavy winds.

#### Location

- 1 = small: isolated to specific area during one event
- 2 = medium: multiple areas during one event
- 3 = large: significant portion of the town during one event

# Frequency of Occurrence

- 0 = unlikely: less than 1% probability in the next 100 years
- 1 = possible: between 1 and 10% probability in the next year; or at least one chance in next 100 years
- 2 = likely; between 10 and 100% probability in the next year; or at least one chance in next 10 years
- 3 = highly likely: near 100% probability in the next year

#### Magnitude/Severity

- 1 = limited: injuries and/or illnesses are treatable with first aid; minor "quality of life" loss; shutdown of critical facilities and services for 24 hours or less; property severely damaged < 10%
- 2 = significant: injuries and/or illnesses do not result in permanent disability; shutdown of several critical facilities for more than one week; property severely damaged <25% and >10%
- 3 = critical: injuries and/or illnesses result in permanent disability; complete shutdown of critical facilities for at least two weeks; property severely damaged <50% and >25%
- 4 = catastrophic: multiple deaths; complete shutdown of facilities for 30 days or more; property severely damaged >50%

	<i>Existing Capabilities</i> gives an overview of the measures that the Town is currently undertaking to mitigate the given hazard. These may take the form of ordinances and codes, structural measures such as dams, or public outreach initiatives.			
	<i>Vulnerabilities and Risk Assessment</i> focuses on the specific areas at risk to the hazard. Specific land uses in the given areas are identified. Critical buildings and infrastructure that would be affected by the hazard are identified.			
	<b>Potential Mitigation Strategies and Actions</b> identifies mitigation alternatives, including those that may be the least cost effective or inappropriate for North Canaan.			
	Summary of Proposed Strategies and Actions provides a summary of the recommended courses of action for North Canaan, which are included in the STAPLEE analysis described below.			
pro	is document concludes with a strategy for implementation of the HMP, including a schedule, a ogram for monitoring and updating the Plan, and a discussion of technical and financial ources.			
<u>Dis</u>	scussion of STAPLEE Ranking Method			
me adr ST (FI ST En	prioritize recommended mitigation measures, it is necessary to determine how effective each asure will be in reducing or preventing damage. A set of criteria commonly used by public ministration officials and planners was applied to each proposed strategy. The method, called APLEE, is outlined in FEMA planning documents such as <i>Developing the Mitigation Plan</i> EMA 386-3) and <i>Using Benefit-Cost Review in Mitigation Planning</i> (FEMA 386-5). APLEE stands for the "Social, Technical, Administrative, Political, Legal, Economic, and vironmental" criteria for making planning decisions. The Local Mitigation Planning indbook (March 2013) also supports this type of methodology.			
pot	nefit-cost review was emphasized in the prioritization process. Criteria were divided into tential benefits (pros) and potential costs (cons) for each mitigation strategy. The following testions were asked about the proposed mitigation strategies:			
	<ul> <li>Social:         <ul> <li>Benefits: Is the proposed strategy socially acceptable to North Canaan?</li> <li>Costs: Are there any equity issues involved that would mean that one segment of North Canaan could be treated unfairly? Will the action disrupt established neighborhoods, break up voting districts, or cause the relocation of lower-income people? Is the action compatible with present and future community values?</li> </ul> </li> </ul>			

Benefits: Will the proposed strategy work? Will it reduce losses in the long term with

<u>Costs</u>: Is the action technically feasible? Will it create more problems than it will solve?

minimal secondary impacts?

Does it solve the problem or only a symptom?

**□** Technical:

1.4

#### **□** Administrative:

- <u>Benefits</u>: Does the project make it easier for the community to administrate future mitigation or emergency response actions?
- Costs: Does North Canaan have the capability (staff, technical experts, and/or funding) to implement the action, or can it be readily obtained? Can North Canaan perform the necessary maintenance? Can the project be accomplished in a timely manner?

#### □ Political:

- <u>Benefits</u>: Is the strategy politically beneficial? Is there public support both to implement and maintain the project? Is there a local champion willing to see the project to completion? Can the mitigation objectives be accomplished at the lowest cost to the community (grants, etc.)?
- Costs: Have political leaders participated in the planning process? Do project stakeholders support the project enough to ensure success? Have the stakeholders been offered the opportunity to participate in the planning process?

# ☐ Legal:

- <u>Benefits</u>: Is there a technical, scientific, or legal basis for the mitigation action? Are the proper laws, ordinances, and resolutions in place to implement the action?
- Costs: Does North Canaan have the authority to implement the proposed action? Are there any potential legal consequences? Will the community be liable for the actions or support of actions, or for lack of action? Is the action likely to be challenged by stakeholders who may be negatively affected?

#### **□** Economic:

- Benefits: Are there currently sources of funds that can be used to implement the action? What benefits will the action provide? Does the action contribute to community goals, such as capital improvements or economic development?
- Costs: Does the cost seem reasonable for the size of the problem and the likely benefits? What burden will be placed on the tax base or local economy to implement this action? What proposed actions should be considered but be tabled for implementation until outside sources of funding are available?

#### ☐ Environmental:

- Benefits: Will this action beneficially affect the environment (land, water, endangered species)?
- <u>Costs</u>: Will this action comply with local, state, and federal environmental laws and regulations? Is the action consistent with community environmental goals?

Each proposed mitigation strategy presented in this plan was evaluated and quantitatively assigned a "benefit" score and a "cost" score for each of the seven STAPLEE criteria, as outlined below:

☐ For potential benefits, a score of "1" was assigned if the project will have a beneficial effect for that particular criterion; a score of "0.5" was assigned if there would be a slightly beneficial effect; or a "0" if the project would have a negligible effect or if the questions were not applicable to the strategy.

u	For potential costs, a score of "-1" was assigned if the project would have an unfavorable impact for that particular criterion; a score of "-0.5" was assigned if there would be a slightly unfavorable impact; or a "0" if the project would have a negligible impact or if the questions were not applicable to the strategy.
	Technical and Economic criteria were double weighted (multiplied by two) in the final sum of scores.
	The total benefit score and cost score for each mitigation strategy was summed to determine each strategy's final STAPLEE score.

An evaluation matrix with the total scores from each strategy can be found in Appendix A. Strategies are prioritized according to final score in Section 10. The highest scoring is determined to be of more importance economically, socially, environmentally, and politically and, hence, is prioritized over those with lower scoring.

The highest-ranking proposed structural projects were additionally evaluated through qualitative methods. The results of the qualitative assessments are included in Appendix A. See Section 10.3 for details.

# 1.5 Discussion of Benefit-Cost Ratio

Although a community may implement recommendations as prioritized by the STAPLEE method, an additional consideration is important for those recommendations that may be funded under the FEMA mitigation grant programs. To receive federal funding, the mitigation action must have a benefit-cost ratio (BCR) that exceeds a value of 1.0. Calculation of the BCR is conducted using FEMA's Benefit Cost Analysis (BCA) toolkit. The calculation method may be complex and vary with the mitigation action of interest. Calculations are dependent on detailed information such as property value appraisals, design and construction costs for structural projects, and tabulations of previous damages or NFIP claims.

Although it is beyond the scope of this Plan to develop precise BCRs for each recommendation, the likelihood of receiving funding is estimated for each recommendation as presented in Appendix A. When pursuing grants for selected projects, this information can be used to help select the projects that have the greatest chance of successfully navigating through the application review process.

# 1.6 Documentation of the Planning Process

The Town is a member of the Northwestern Connecticut Council of Governments (NWCCOG), the regional planning body responsible for North Canaan and eight other member municipalities: Canaan, Cornwall, Salisbury, Sharon, Kent, Warren, Roxbury and Washington.

Ms. Jocelyn Ayer of NWCCOG and Mr. Douglas Humes, Jr., the Town First Selectman coordinated the development of this HMP. The NWCCOG applied for the planning grant from FEMA through the Connecticut Department of Emergency Services and Public Protection (DESPP) Division of Emergency Management and Homeland Security (DEMHS). The adoption of this plan in the Town of North Canaan will be coordinated by Town personnel.

the	lone & MacBroom, Inc. (MMI) prepared the subject Plan. In addition to the First Selectman, following individuals from the Town provided information, data, studies, reports, and servations and were involved in the development of the Plan:
	Mr. Dinnie Light, Highway Department Mr. Bryon Carlson, Highway Department
info sho pul	extensive data collection, evaluation, and outreach program was undertaken to compile formation about existing hazards and mitigation in the town, as well as to identify areas that buld be prioritized for hazard mitigation. Appendix D contains copies of meeting minutes, the blic information meeting presentation, and other records that document the development of this MP. The following is a list of meetings that were held as well as other efforts to develop this in:
	A project kickoff meeting was held February 26, 2014. Necessary documentation was collected, and problem areas within the town were discussed.
	Limited field reconnaissance was performed on February 26, 2014.
	A regional public information meeting was held on November 7, 2013.
	Karen Bartomioli with the Lakeville Journal attended as well as two members of the general

• Gordon Ridgway, Town of Cornwall, First Selectman

public, who did not sign-in. The following individuals also attended:

- Skip Kearns, Cornwall resident
- Heidi Kearns, Cornwall Planning and Zoning
- David Colbert, Cornwall Planning and Zoning
- Jack Travers, Former First Selectman, Town of Warren
- Michael Jastremski, Housatonic Valley Association
- Jocelyn Ayer, NWCCOG

The following were points of discussion:

- The Housatonic Valley Association will be conducting Stream Habitat Continuity Surveys in 2014 and 2015. As these assessments will focus on improving areas where roads cross over streams, there is the potential to tie these surveys into hazard mitigation planning activities.
- There were questions regarding how the plans are being funded. It was explained that the plan for each community was being 75% funded under a grant through FEMA. The remaining 25% of the funding is being paid for out of NWCCOG member dues.
- The group had additional questions regarding the FEMA grant programs. It was explained that these particular plans would not affect any funding opportunities to which NWCCOG communities were already entitled. Instead, adoption of the plans opens up additional opportunities to obtain grant funding.

- The group mentioned that the prevalence of dead end roads in the area make emergency access difficult, particularly when trees fall and strand residents. The representative from Warren indicated that their community had been opening up unimproved sections of roads in order to provide emergency access via a second egress.
- The Downtown Streetscape project in Kent was mentioned as a potential mitigation area for overhead power lines. It was explained that while moving overhead wires underground is a project eligible for grant funding, such projects are very expensive and often do not generate enough benefits to be considered cost-effective and therefore qualify for a grant.
- A discussion regarding the resizing of culverts took place. One example was how the
  West Cornwall Bridge overtopped in 1955 causing significant flooding along Main
  Street. While the current bridge was sized for a particular storm event at the time, as the
  frequency and magnitude of rainfall has been increasing over the past several decades
  many communities are finding that their infrastructure can no longer convey the same
  frequency storm event without overtopping. A standard recommendation in each plan
  will be to review culvert conveyance based on existing hydrology.
- The group mentioned that beaver dams were a big concern related to flooding, particularly in Cornwall. Town personnel should be contacted to obtain more information regarding these areas and potential mitigation measures.
- Mr. Ridgway discussed the importance of these particular FEMA grants in relation to being able to fund new generators. The Town of Cornwall is seeking a \$40,000 grant under HMGP for a new generator at the West Cornwall Fire House. He also mentioned that a section of streambed along River Road is located near the road elevation and a recent flood almost washed out the road. This could potentially be an area where a grant could be useful. Also, the Town has a concern with a privately-owned dam on Popple Swamp Road. The landowner lives in New York State and this is a second home/cottage. The Town is concerned that proper maintenance is not being conducted. The Town has contacted the Dam Safety Division at DEEP but no progress has been made.
- Siltation in Lake Waramaug in Warren was mentioned as an issue. A large area has filled in with silt and the Town would like to obtain a grant to remove the sediment.
- ☐ The Draft Plan was reviewed by the Town in July 2014.
- ☐ The Plan was reviewed by DEMHS in July 2014 and FEMA in August 2014.

# **Public Participation**

Residents, business owners, and other stakeholders of North Canaan, neighboring communities, and local and regional entities were invited to the public information meeting via the Waterbury Republican- American newspaper on October 30 and November 7 and in the Lakeville Journal on November 14 and via the home page of the Towns of Kent, Cornwall, Washington, Roxbury and Warren. Copies of these announcements are included in Appendix D.

In addition to holding a regional public information meeting for the plan, NWCCOG elected to host a public survey via www.surveymonkey.com. The survey was open from October 11, 2013 through December 15, 2013, with the last participant taking the survey on December 9, 2013. Notification of the survey was posted in the Waterbury Republican-American newspaper on October 30 and November 7, in the Lakeville Journal on November 14. The survey link was also posted on the websites for the Towns of Kent, Warren, Washington, Roxbury and Cornwall.

Eighty eight people participated in the survey. Table 1-4 provides a summary of the number of responses from each of the NWCCOG municipalities.

Table 1-4
Participant Municipalities

Town	Number of Responses
Washington	7
Kent	24
Cornwall	21
Warren	9
Sharon	6
Roxbury	16
Salisbury	2
Canaan	1
North Canaan	2

Participants were asked which recent events, if any, have generated awareness of natural hazards. Table 1-5 summarizes the responses.

Table 1-5 Contributors of Awareness of Natural Hazards

Events	Number of Participants Selecting
Winter Storm Nemo in February 2013	26
"Superstorm" Sandy in October 2012	48
"Winter Storm" Alfred in October 2011	50
Hurricane/Tropical Storm Irene in August 2011	37
The Virginia earthquake in August 2011	5
The Springfield, Massachusetts tornado of June 2011	14
The snowstorms of January 2011 that caused buildings to collapse	28

The next question asked responders to rate hazards on a scale of 1 (low threat) to 3 (high threat). Responses are presented in Table 1-6.

Table 1-6
Potential Hazard Threat Based on Survey Response

Hazard	Number of Participants Selecting		
	Low Threat	Moderate Threat	High Threat
Flooding	38	14	9
Hurricanes and Tropical Storms	12	34	15
Tornadoes	17	30	14
Severe Thunderstorms (including hail or downbursts)	10	26	26
Winter Storms (including snow or ice) and Blizzards	4	19	37
Earthquakes	54	6	2
Wildfires and Brush Fires	42	14	6
Dam Failure (could be caused by other hazards)	53	9	0

The follow-up question asks which hazards have impacted the participant's home or business. Table 1-7 summarizes these results.

Table 1-7
Impact to Responder's Home or Business

Hazard	Number of Participants Selecting
None – Have not been impacted	9
Flooding	15
Hurricanes and Tropical Storms	34
Tornadoes	6
Severe Thunderstorms (including hail or downbursts)	35
Winter Storms (including snow or ice) and Blizzards	48
Earthquakes	0
Wildfires and Brush Fires	1
Dam Failure (could be caused by other hazards)	0

When asked if any specific areas of their towns were vulnerable to any of the above hazards, a participant from North Canaan entered the following:

☐ Town and State should work together to clear and clean Camp Brook that runs through center of town.

Participants were asked if they had seen an increase in maintenance in their towns due to increased pressure on utility companies to harden overhead utility lines and manage vegetation. Forty responded yes and 22 responded no.

Participants were asked for their thoughts regarding flood insurance in response to changes that are underway that will increase flood insurance premiums nationwide. The responses are summarized in Table 1-8.

Table 1-8
Responses Regarding Increased Flood Insurance Premiums

Actions	Number of Participants Selecting
I do not have flood insurance and have no opinions about it.	31
I currently have flood insurance and am not concerned about changes in the premium.	1
I currently have flood insurance and will be looking for ways to reduce my premiums, such as elevating my home.	1
I would be supportive of my town looking for ways to reduce flood insurance policies for all policyholders.	25

One participant from North Cannan also provided the following comment.

This is going to be a major issue in our little town, we need to reduce chance of by cleaning Camp Brook and help in reducing insurance (flood) increasing.

The next question asked what are the most important things that your town government can do to help its residents or organization be prepared for a disaster, and become more resilient over time. Responses are presented in Table 1-9.

Table 1-9
Most Important Community Mitigation Measures Based on Survey Response

Actions	Number of Participants Selecting
Provide outreach and education to residents, businesses, and organizations to help them understand risks and be prepared	39
Provide technical assistance to residents, businesses, and organizations to help them reduce losses from hazards and disasters	28
Conduct projects in the community, such as drainage and flood control projects, to mitigate for hazards and minimize impacts from disasters	30
Make it easier for residents, businesses, and organizations to take their own actions to mitigate for hazards and become more resilient to disasters	22
Improve warning and response systems to improve disaster management	23
Enact and enforce regulations, codes, and ordinances such as zoning regulations and building codes	26

When asked if the responder has taken any actions to reduce the risk or vulnerability to his or her family, home, or organization, responses were as presented in Table 1-10.

Table 1-10 Personal Mitigation Measures Taken Based on Survey Response

Actions	Number of Participants Selecting
Elevated my home or business to reduce flood damage	0
Floodproofed my business to reduce flood damage	2
Installed storm shutters or structural/roof braces to reduce wind damage	2
Taken measures to reduce snow build-up on roofs	29
Cut back or removed vegetation from my overhead utility lines or roof	27
Replaced my overhead utility lines with underground lines	8
Managed vegetation to reduce risk of wildfire reaching my home or business	15
Developed a disaster plan for my family, home, or business	24
Maintain a disaster supply kit for my family, home, or business	34
Participated in public meetings to discuss the Plan of Conservation and	15
Development or open space plans	
Participated in public meetings to discuss and approve changes to zoning or subdivision regulations	15
I have not taken any of these actions	3

When asked "If you could choose one action that could be taken in your town to reduce vulnerability to hazards and the disasters associated with these hazards, what would it be," a participant from North Canaan answered with the following:

☐ Clean Camp Brook; rebuild drain under Route 44 at Church St. to help flow.

When asked to provide any additional comments or questions to be addressed as the town updates its hazard mitigation plan, the following response was included:

☐ The unsubsidized flood insurance will be a major issue and we need to help owners, buyers of real estate, by pushing legislation in state to reduce the increase.

Thirty participants provided additional contact information for follow-up.

Overall, the survey revealed that NWCCOG residents see hurricanes, tropical storms, and winter storms as having the highest threat and impacting their own homes the most. Residents are primarily concerned with risks to power lines and overhead utilities during winter and wind storms, and desire more maintenance and removal of trees. Secondary to the concerns about trees and power outages, a few residents have concerns about flooding.

#### **Public Participation Summary**

A resident of North Canaan that participated in the survey repeated a certain theme with his comments: that Camp Brook should be "cleaned out" to reduce flood risks. Although the town does not believe that the brook needs to be cleared, several mitigation actions have been advanced to address flooding along Camp Brook and are listed on pages 3-19 and 3-20. The resident also stated that flood insurance premiums needed to be reduced which resulted in the action listed on page 3-19 to "provide outreach regarding which types of mitigation options are appropriate for reducing flood insurance premiums"

Opportunities for the public to review the Plan were implemented in advance of the public hearing to adopt this plan in 2014. The draft Plan that is required to be submitted to FEMA for review and approval was first posted on the Town website (http://www.northcanaan.org) to provide opportunities for public review and comment.

# 1.7 Coordination with Neighboring Communities

For adjacent communities that <u>are</u> part of the NWCCOG, the monthly NWCCOG meetings provided a continuing forum for towns to collaborate and share thoughts about hazards that may span municipal boundaries.

For adjacent communities that <u>are not</u> part of the NWCCOG, letters were mailed to these adjacent communities to invite them to participate in the planning process for this hazard mitigation plan. A copy of the letter is included in Appendix D. To date, none of the surrounding communities have responded or accepted the invitation to participate

#### 2.0 COMMUNITY PROFILE

# 2.1 Physical Setting

The town of North Canaan is located in northwestern Litchfield County and is home to a population of approximately 3,300. North Canaan is bordered by the municipalities of Canaan<sup>3</sup> to the south, Norfolk to the east, Salisbury to the west and Sheffield, Massachusetts to the north. Refer to Figures 2-1 and 2-2 for maps showing the regional location of North Canaan within the NWCCOG region.

North Canaan is located in the northwest region of Connecticut in an area known as Litchfield Hills. The topography of the town is characterized by glacially formed mountains and hills interspersed with relatively flat and narrow floodplain areas. The Housatonic River, the Hollenbeck River, Blackberry River, Whiting River, and the Konkapot River along with numerous other small rivers and streams course through the town. The varying terrain of North Canaan makes the town vulnerable to an array of natural hazards.

# 2.2 Existing Land Use


The town of North Canaan was incorporated in 1858 after separation from the town of Canaan. North Canaan is a picturesque rural town of almost 3,300 residents situated along the east bank of the Housatonic River. The land area of North Canaan is approximately 19.6 square miles.

According to the 2008 Flood Insurance Study for the town of North Canaan, "the principal industries in North Canaan are disposable syringes, limestone products, electronic assemblies, gravel, sand and dairy farming. Wholesale and retail trade business employs almost one third of the population, which is followed closely by manufacturing.

Canaan Village (located in the northwest corner of the town of North Canaan) provides many commercial and employment opportunities to surrounding communities. Future land use plans call for modest growth of residential, commercial and industrial areas, and preservation of floodplains, swampland, open space and selected recreational areas."

Table 2-1 summarizes 2006 land cover data which was derived from satellite imagery. Areas shown as turf and grass are maintained grasses such as residential and commercial lawns or golf courses. Development is generally spread throughout the community and not particularly concentrated in any one area. Steep topography and poor soil conditions limit development within the town. According to the data, about 53% of North Canaan is forested and approximately 9.8% is developed.

<sup>&</sup>lt;sup>3</sup> For the benefit of FEMA personnel, the Village of Canaan is located in the Town of North Canaan, whereas the Town of Canaan is located to the south.

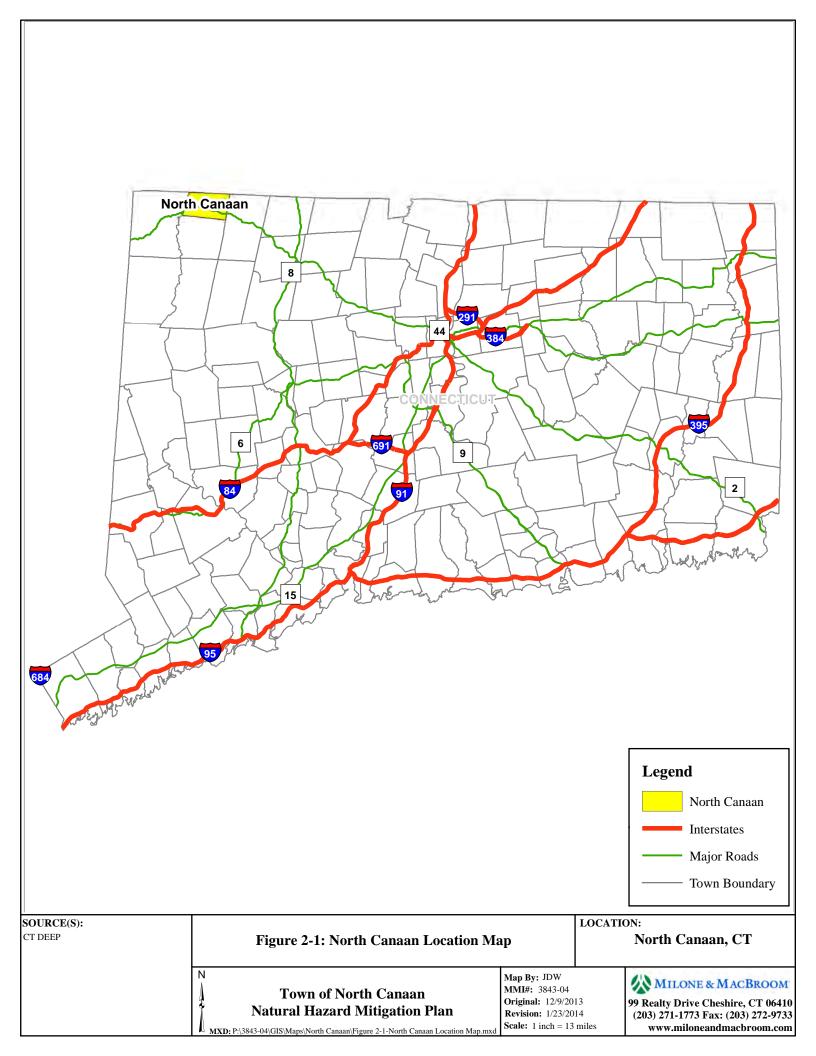

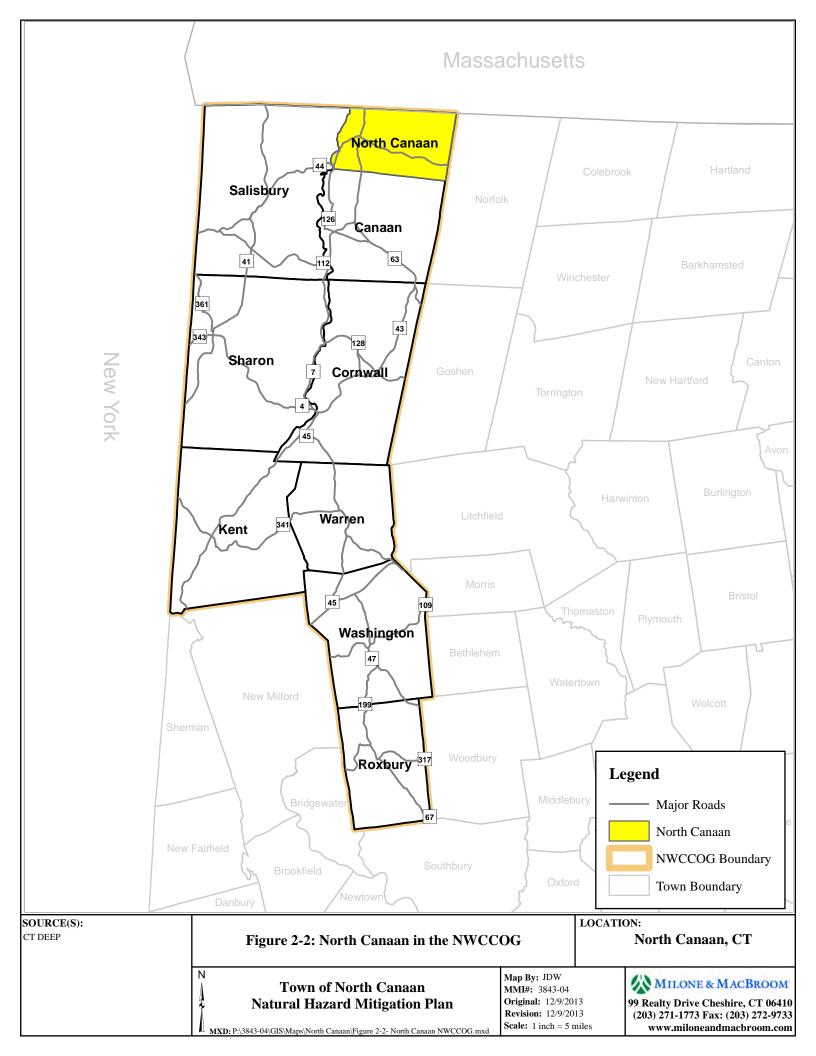


Table 2-1 2006 Land Cover by Area

Land Cover	Area (acres)	Percent of Community
Deciduous Forest	4,177	33.4%
Developed	1,226	9.8%
Turf & Grass	615	4.9%
Coniferous Forest	2,269	18.2%
Agricultural Field	3,085	24.7%
Forested Wetland	207	1.7%
Water	116	0.9%
Other Grasses	127	1%
Barren	644	5.2%
Utility (Forest)	15	0.1%
Non-Forested Wetland	14	0.1%
Tidal Wetland	0	0.0%
Total	12,496	100%

Source: UCONN Center for Land Use Education and Research (CLEAR)

# 2.3 Geology


Geology is important to the occurrence and relative effects of natural hazards such as floods and earthquakes. Thus, it is important to understand the geologic setting and variation of bedrock and surficial formations in North Canaan. The following discussion highlights North Canaan's geology at several regional scales. Geologic information discussed in the following section was acquired in Geographic Information System (GIS) format from the United States Geological Survey and the Connecticut DEEP.


North Canaan is underlain by relatively hard metamorphic and igneous bedrock including a variety of gneiss, schist, and marble (Figure 2-3). Glacially influenced hard pan soils are found throughout, with scattered deposits of sand and gravel found within river floodplains.

Continental ice sheets moved across
Connecticut at least twice in the late
Pleistocene era. As a result, North
Canaan's surficial geology is
characteristic of the depositional
environments that occurred during glacial
and postglacial periods. Refer to Figure 2-4

adulters or with wetland areas significant floodplain storage.
smaller glacial till watercourses thr
Canaan can also cause flooding.
stratified drift also has bearing of intensity of earthquakes.

The amount of stratified glacial meltwater deposits present in a community is important as areas of stratified materials are generally coincident with inland floodplains. These materials were deposited at lower elevations by glacial streams, and these valleys were later inherited by the larger of our present day streams and rivers. Oftentimes these deposits are associated with public water supply aquifers or with wetland areas that provide significant floodplain storage. However, the smaller glacial till watercourses throughout North Canaan can also cause flooding. The amount of stratified drift also has bearing on the relative intensity of earthquakes.

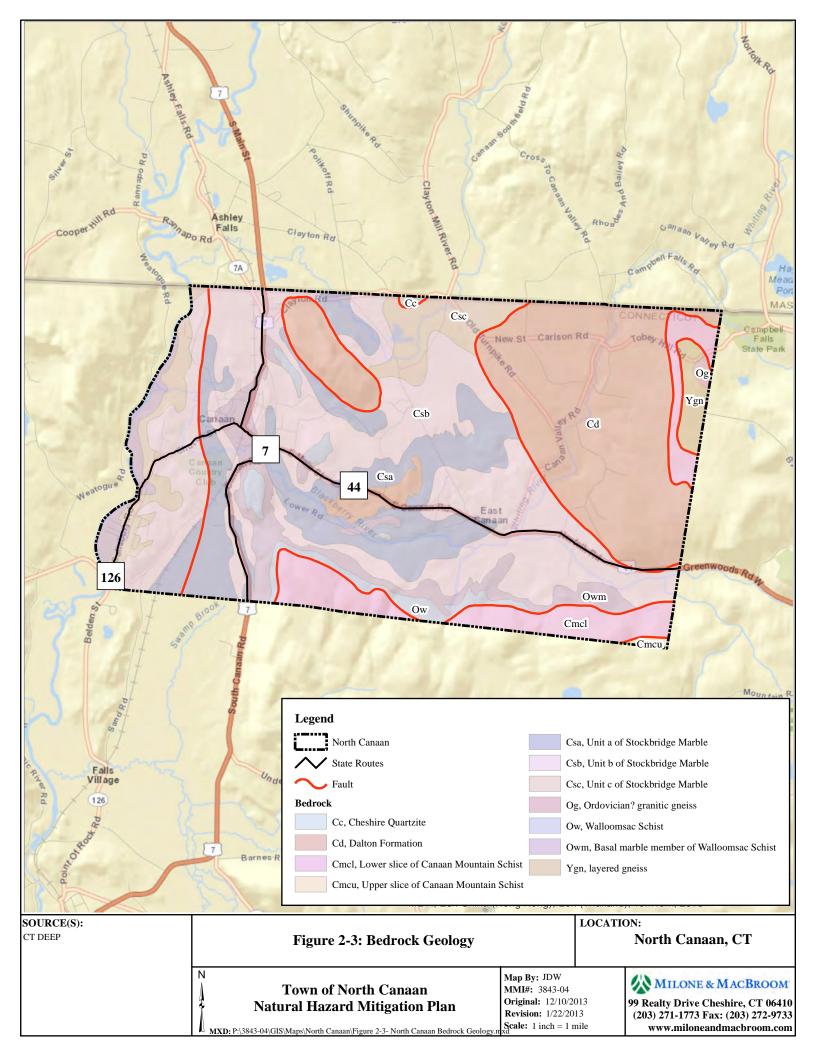

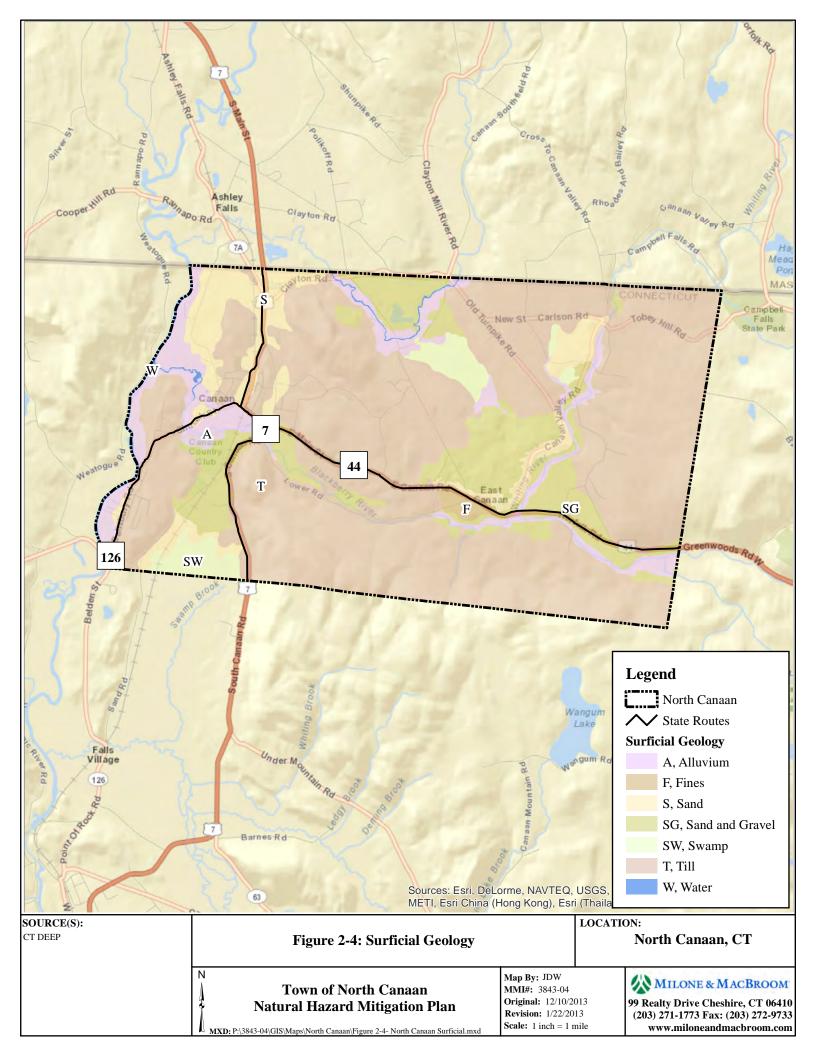

North Canaan is covered primarily (nearly 75%) by glacial till. Tills contain an unsorted mixture of clay, silt, sand, gravel, and boulders deposited by glaciers as a ground moraine. The deposits are generally less than 50 feet thick although deeper deposits of till are scattered across the hillier sections of the town. Stratified glacial meltwater deposits are related to the various water bodies in town, particularly the Housatonic, Hollenbeck, Blackberry and Konkapot Rivers. These deposits primarily contain stratified sands and gravels.

#### 2.4 Current Climate Conditions and Climate Change

North Canaan has a climate characterized by moderate but distinct seasons. The mean annual temperature is 48.4 degrees Fahrenheit based on temperature data compiled by the National Climatic Data Center (NCDC), Falls Village weather station, from 1981 to 2010. Summer high temperatures typically rise to the mid 80s, and winter temperatures typically dip into the mid teens as measured in Fahrenheit. Extreme conditions raise summer temperatures to near 100 degrees and winter temperatures to below zero. Average annual snowfall is 20.5 inches per year. Mean annual precipitation is 45.8 inches.

By comparison, average annual statewide precipitation based on more than 100 years of record is less at 45 inches. However, average annual precipitation in Connecticut has been increasing by 0.95 inches per decade since the end of the 19<sup>th</sup> century (Miller et. al., 1997; NCDC, 2005). Likewise, annual precipitation in the town has increased over time.

The continued increase in precipitation only heightens the need for hazard mitigation planning as the occurrence of floods may change in accordance with the greater precipitation.

Like many rural towns near suburban areas in the United States, North Canaan experienced a moderate population boom following World War II. This population increase led to concomitant increases in infrastructure. Many new storm drainage systems and culverts were likely designed using rainfall data published in "Technical Paper No. 40" by the U.S. Weather Bureau (now the National Weather Service) (Hershfield, 1961). The rainfall data in this document dates from the years 1938 through 1958. These values are the standard used in the current *Connecticut DOT Drainage Manual* (2000) and have been the engineering standard in Connecticut for many years.

This engineering standard was based on the premise that extreme rainfall series do not change through time such that the older analyses reflect current conditions. Recent regional and state-specific analyses have shown that this is not the case as the frequency of two-inch rainfall events has increased, and storms once considered a one-in-100 year event are now likely to occur twice as often. As such, the Northeast Regional Climate Center (NRCC) has partnered with the Natural Resources Conservation Service (NRCS) to provide a consistent, current regional analysis of rainfall extremes (http://precip.eas.cornell.edu/) for engineering design. The availability of updated data has numerous implications for natural hazard mitigation as will be discussed in Section 3.0.

DOT commenced a "Climate Change and Extreme Weather Pilot Project" in 2013 using a grant from the Federal Highway Administration. The project will include vulnerability assessments of culverts and bridges in Litchfield County that are between six and 20 feet in length, with regard to flooding caused by increasing precipitation and extreme rainfall events. The assessment will evaluate the existing storm event design standards, the recent (ten year) historic actual rainfall intensity and frequency, and evaluate the hydraulic capacity of these structures using the

projected increases in rainfall based on best available data and studies. Litchfield County was selected due to the inland flood damages observed in the northwest corner of the state over the last few years. The scope of this project was identified in the Connecticut Climate Change Preparedness Plan which was a product of a statewide effort that took place from 2005 through 2011.

Along with the vulnerability assessment, the project will include a process that assigns a criticality value to the risk of failure. This will assist the Department in prioritizing replacement and reconstruction efforts to these structures where they pose the greatest risk to human health and safety, public and private property loss, and the economic risk of replacement after failure versus proactive replacement. This project will add to the existing framework by providing a model process for assessing the hydraulic capacity of smaller structures in the rural urban fringe and the criticality of those assets in similar geographies.

In addition, The Housatonic River Valley Association has been funded to conduct stream habitat continuity assessments in the Connecticut portion of the Housatonic River Watershed. The purpose of the assessment is to identify road crossings that may be barriers for fish and wildlife, public hazards or impediments to emergency services during flood events as outlined in the Stream Habitat Continuity project summary page found in Appendix D.


# 2.5 <u>Drainage Basins and Hydrology</u>

North Canaan is divided among the following five subregional drainage basins: Hollenbeck River, Housatonic River, Blackberry River, Konkapot River and Whiting River. The watersheds are as shown on Figure 2-5 and described in detail below.

The majority of the drainage basins have FEMA-defined Special Flood Hazard Areas (SFHAs) along the primary watercourses. Such areas consist of 1% annual chance storm floodplains without elevations, 1% annual chance storm floodplains with elevations, and 0.2% annual chance floodplains. Refer to Section 3 for more detail regarding SFHAs.

# Hollenbeck River

The Hollenbeck River drainage basin occupies a small portion of southwestern North Canaan. The headwaters of the Hollenbeck River begin in Cornwall. Many tributaries enter into the main channel of the river including Brown Brook and Wangum Lake Brook both which make up sub drainage basins of their own. Swamp Brook comes down from the north just extending into North Canaan and enters Hollenbeck less than two miles east of the mouth. The river channel becomes highly sinuous with tight meanders in the lower stretch before draining into the Housatonic River. Two low hazard classified dams sit along the Hollenbeck River, one in Canaan holding back the Hollenbeck Pond Dam and the other in Cornwall just off Bradford Brook called Van Doren Pond Dam.

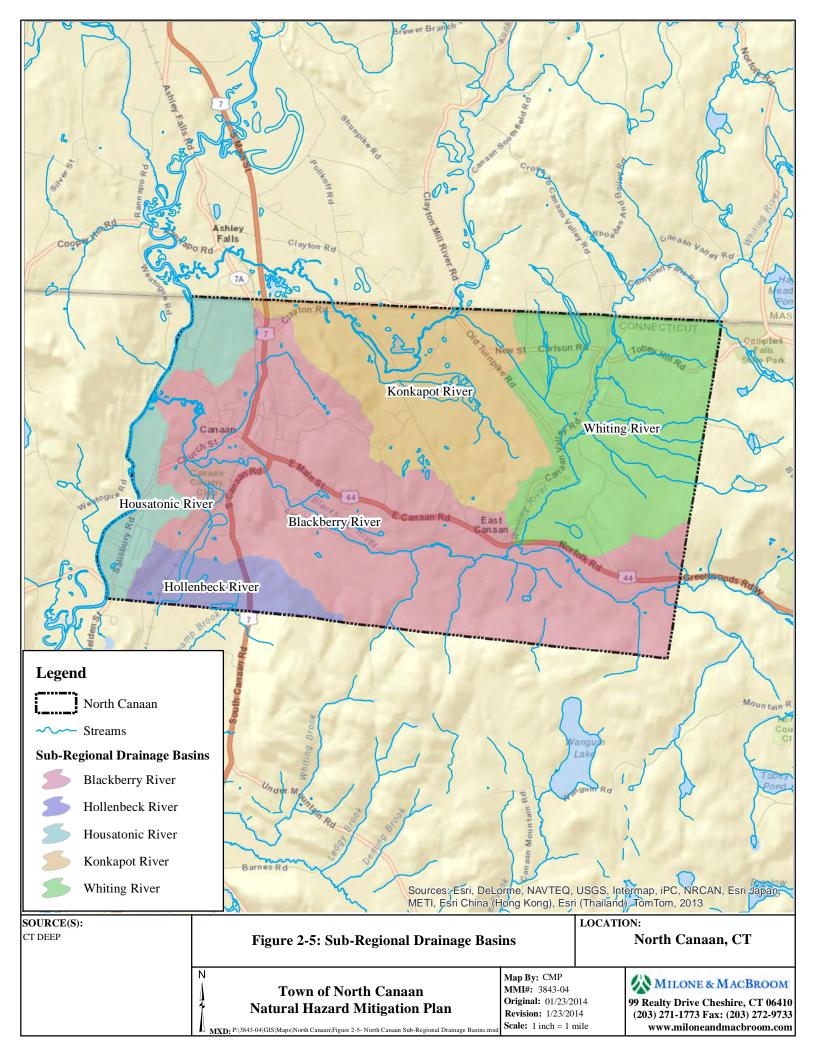

#### Housatonic River

The Housatonic River drains an area of 1,948 square miles from Pittsfield, Massachusetts to Milford, Connecticut where it empties into Long Island Sound. The river flows a total of 134 miles from its upper reach to the sound with 1,234 square mile of the total drainage area existing in Connecticut. After crossing into Connecticut, the river creates the border for several towns including Salisbury, North Canaan, Canaan and just south, Sharon and Cornwall. Many of the sub regional drainages in these towns flow into the Housatonic River along with small tributaries that flow directly into the river, which make up the Housatonic sub regional drainage basin. The main channel of the Housatonic is lined with 100-year floodplains that extend on either side of the river with areas that further extend making up the 500-year floodplains.

#### Blackberry River

The Blackberry River drainage basin is part of a large network of converging streams covering a land area of around 27 square miles. With much of the headwaters in Norfolk, a few large ponds feed the tributaries that flow into the Blackberry River including Bigelow Pond, Tobey Pond and Wood Creek Pond. A few small tributaries begin in Canaan and flow north intersecting with the Blackberry River, responsible for the drainage of the northeast edge of Canaan. The majority of the drainage lies within Norfolk and North Canaan. The river flows west along Route 44 into North Canaan and flows into the Housatonic River. SFHAs lie alongside of much of the main channel expanding around the mouths of some input tributaries. The floodplains widen within the last two miles of stretch before the intersection of the Blackberry and Housatonic Rivers.

# Konkapot River

Beginning in south western Massachusetts, the Konkapot River flows south across the Connecticut border in North Canaan and curves back up across the border again. The river drains a large sub regional drainage basin consisting of just less than 62 square miles, primarily in Massachusetts. Squabble Brook in North Canaan is the only tributary in town that flows to the Konkapot River, which is bordered by broad 100-year floodplains much outside of its meandering banks. The main channel of the Konkapot River is also surrounded by 100-year floodplains and some 500-year floodplains that extend outside of the 100-year boundaries.

#### Whiting River

The Whiting River begins in Massachusetts and flows south into North Canaan, where several branching tributaries merge from the east. Much of the sub basin area is in Massachusetts and a small portion in Norfolk with less than a quarter of the area making up the northeast corner of North Canaan. Just south of the Massachusetts border is the Whiting River Reservoir, held back by the Whiting River Dam which is classified as a high hazard potential dam. The Whiting River flows south into the Blackberry River converging at Route 44.

#### 2.6 Population and Demographic Setting

According to the U.S. Census, the Town of North Canaan had a population of 3,350 in the year 2000. North Canaan had a population of 3,315 in 2010, a decrease of 1%. As noted in Table 2-2, North Canaan ranks third out of the nine NWCCOG municipalities in Connecticut in terms of population. The Connecticut State Data Center predicts that population growth in North Canaan will increase over the next eleven years. The population in 2025 is projected to be 3,323.

North Canaan has a limited population of people who are linguistically isolated and moderate population of elderly individuals. According to data collected by the U.S. Census Bureau for the period around 2010, 18.9% of the population is aged 65 or over.

Elderly, linguistically isolated, and disabled populations have numerous implications for hazard mitigation as they may require special assistance or different means of notification before and during natural hazards.

Table 2-2 Population by Municipality and Region, 2010

NWCCOG	2010
Municipality	Population
Warren	1,461
Salisbury	3,741
North Canaan	3,315
Canaan	1,234
Sharon	2,782
Cornwall	1,420
Kent	2,979
Washington	3,578
Roxbury	2,262

Source: Census 2010

#### 2.7 Governmental Structure and Capabilities

The Town of North Canaan is governed by a Selectman-Town Meeting form of government in which legislative responsibilities are shared by the Board of Selectmen and the Town Meeting. The First Selectman serves as the chief executive.

In addition to Board of Selectmen and the Town Meeting, there are boards, commissions and committees providing input and direction to Town administrators. Also, Town departments provide municipal services and day-to-day administration. Many of these commissions and departments play a role in hazard mitigation, including the Planning and Zoning Commission, Conservation and Inland Commission, the Building Official, the Land Use Office, the Fire Department, Emergency Medical Services, and the Highway Department.

Drainage complaints are routed through the First Selectman's office and the Highway Department. These complaints are usually received via phone, mail, or email and are recorded in a logbook. The complaints are investigated as necessary until remediation surrounding the individual complaint is concluded.

# 2.8 Development Trends

The Connecticut Economic Resource Center indicates that North Canaan had a 2011 population of 3,329 (slightly higher than the 2010 census count) with a total of 1,646 housing units. The recent economic downturn generally slowed housing development in North Canaan. For

example, a golf course and housing development were once proposed for the eastern side of the town but approvals were never finalized and the project was cancelled.

The 2008 Plan of Conservation and Development indicates that "although the downtown area has felt some of the impact of the economic sluggishness in the last few years, there are positive signs of new developments, including the resurgence of interest in tourism and general citizen concern over the appearance of downtown."

The 2006 Plan of Conservation and Development states that future commercial uses are expected to be developed primarily in or adjacent to the existing downtown area. The Plan also outlines the following goals related to residential, commercial and industrial development in North Canaan:

Residential – to provide for varying densities and types of accommodations based on the needs and desires of the citizens, the physical characteristics of the land, anticipated utility service and existing development patterns.
Commercial – (1) to develop Cannan Center as a viable primary commercial area with sufficient land to provide needed commercial and ancillary services, anticipated utility services and efficient traffic circulation (2) to provide limited neighborhood retail and service uses for convenience shopping, in appropriate locations, designed to reduce strip commercial and avoid depreciation of adjacent properties or conflict with residential uses.
Industrial – to protect North Canann's industrial land with proper zoning regulations by planning for a cohesive type of industrial park development with provision for adequate vehicular ad utility services and proper protection for adjacent residential areas.

In general, North Canaan encourages future residential and non-residential development that can be supported by existing infrastructure. Future development should be consistent with and enhance the existing character of the town while avoiding adverse impacts to the environment (particularly in sensitive areas).

# 2.9 Critical Facilities, Sheltering Capabilities, and Emergency Response Capabilities

North Canaan has identified six critical facilities. Many critical facilities, such as fire, and governmental buildings as well as utilities are required to ensure that day-to-day management of the town continues. Other facilities such as the senior center and local schools are also considered critical facilities since these contain populations that are more susceptible in an emergency or house important supplies. Not all municipal buildings are critical facilities. Table 2-3 presents a list of critical facilities in North Canaan.

# Table 2-3 Critical Facilities

Facility	Address or Location	Comment	Emergency Power?	Shelter?	In 1% Annual Chance Floodplain?
North Canaan Firehouse	4 East Main Street, Canaan	Regional Emergency Support	Y	N	N
Town Hall	100 Pease Street	Emergency Operations Center, Primary Shelter	Y	Y	N
North Canaan Highway Garage	Pease Street	Regional Emergency Support	Y	N	N
North Canaan Elementary	90 Pease Street	Secondary Shelter	Y	Y	N
Ambulance Garage	Pease Street	Regional Emergency Support	Y	N	N
Senior Center	Quinn Street	Senior Housing	Y	N	N

#### **Sheltering Capabilities**

Emergency shelters are an important subset of critical facilities as they are needed in many emergency situations. North Canaan Town Hall is the primary shelter. This facility has a back-up generator. North Canaan Elementary School is the secondary shelter and also has backup power. In case of a sustained power outage, it is anticipated that 10 to 20% of the population would relocate, although not all of those relocating would necessarily utilize the shelter facilities.

# **Emergency Response Capabilities**

The Emergency Management Director coordinates emergency preparedness in the town of North Canaan. The Director develops plans, protocols, and procedures that assure the safety of North Canaan's citizens. It also provides training for emergency response personnel, supports state and local emergency response exercises, and provides technical assistance to state and local emergency response agencies and public officials. The goal is to provide citizens with the highest level of emergency preparedness before, during, and after disasters or emergencies.

The Town's Emergency Operations Center (EOC), including its Emergency Communications Center, is located at the Town Hall. The EOC has a generator that can power the entire building.

The Town has an EOP that guides its response to emergencies arising from both natural and anthropogenic hazards. The town utilizes Alert Now/Blackboard Connect, which has been acquired by Blackboard Connect to direct geographically specific emergency notification telephone calls into affected areas. This system provides emergency notifications to phones (text messages or calls) but can be used for non-emergency messages too. The town can also send email blasts.

State and federal roads are the major transportation arteries (and therefore evacuation routes) into and out of the town. These include Route 7 and Route 44, which are integral in transporting

patients to the hospital. The town also has a bus that can be used in the event of necessary evacuations. Reportedly, the bus was used twice to evacuate residents from the senior center.

Emergency services can also be cut off by fallen trees or washed out culverts during certain emergencies. The Town performs tree and shrub removal, with a focus on critical roadways. During emergencies and following storms, the highway garage responds to calls related to downed trees.

#### 3.0 FLOODING

# 3.1 Setting

According to FEMA, most municipalities in the United States have at least one clearly recognizable floodprone area around a river, stream, or large body of water. These areas are outlined as SFHAs and delineated as part of the NFIP. Floodprone areas are addressed through a combination of floodplain management criteria, ordinances, and community assistance programs sponsored by the NFIP and individual municipalities.

Many communities also have localized flooding areas outside the SFHA. These floods tend to be shallower and chronically reoccur in the same area due to a combination of factors. Such factors can include ponding, poor drainage, inadequate storm sewers, clogged culverts or catch basins, sheet flow, obstructed drainageways, sewer backup, or overbank flooding from minor streams.

In general, the potential for flooding is widespread across North Canaan, with the majority of major flooding occurring along established SFHAs. The areas impacted by overflow of river systems are generally limited to river corridors and floodplains. Indirect flooding that occurs outside floodplains and localized nuisance flooding along tributaries are also common problems in the town. This type of flooding occurs particularly along roadways as a result of inadequate drainage and other factors. The frequency of flooding in North Canaan is considered likely for any given year, with flood damage potentially having significant effects during extreme events.

#### 3.2 Hazard Assessment

Flooding is the most common and costly natural hazard in Connecticut. The state typically experiences floods in the early spring due to snowmelt and in the late summer/early autumn due to frontal systems and tropical storms although localized flooding caused by thunderstorm activity can be significant. Flooding can occur as a result of other natural hazards, including hurricanes, summer storms, and winter storms. Flooding can also occur as a result of ice jams or dam failure (Section 8.0) and may also cause landslides and slumps in affected areas. According to FEMA, there are several different types of flooding:

<b>Riverine Flooding</b> : Also known as overbank flooding, it occurs when channels receive more rain or snowmelt from their watershed than normal, or the channel becomes blocked by an ice jam or debris. Excess water spills out of the channel and into the channel's floodplain area.
<b>Flash Flooding:</b> A rapid rise of water along a water channel or low-lying urban area, usually a result of an unusually large amount of rain and/or high velocity of water flow (particularly in hilly areas) within a very short period of time. Flash floods can occur with limited warning.
Shallow Flooding: Occurs in flat areas where a lack of a water channel results in water being unable to drain away easily. The three types of shallow flooding include:  O Sheet Flow: Water spreads over a large area at uniform depth.  Ponding: Runoff collects in depressions with no drainage ability.
o <b>Urban Flooding:</b> Occurs when man-made drainage systems are overloaded by a larger

amount of water than the system was designed to accommodate.

Flooding presents several safety hazards to people and property and can cause extensive damage and potential injury or loss of life. Floodwaters cause massive damage to the lower levels of buildings, destroying business records, furniture, and other sentimental papers and artifacts. In addition, floodwaters can prevent emergency and commercial egress by blocking streets, deteriorating municipal drainage systems, and diverting municipal staff and resources.

Furthermore, damp conditions trigger the growth of mold and mildew in flooded buildings, contributing to allergies, asthma, and respiratory infections. Snakes and rodents are forced out of their natural habitat and into closer contact with people, and ponded water following a flood presents a breeding ground for mosquitoes. Gasoline, pesticides, poorly treated sewage, and other aqueous pollutants can be carried into areas and buildings by floodwaters and soak into soil, building components, and furniture.

In order to provide a national standard without regional discrimination, the 1% annual chance flood has been adopted by FEMA as the base flood for purposes of floodplain management and to determine the need for insurance. The risk of having a flood of this magnitude or greater increases when periods longer than one year are considered. For example, FEMA notes that a structure

Floodplains are lands along watercourses that are subject to periodic flooding; floodways are those areas within the floodplains that convey the majority of flood discharge. Floodways are subject to water being conveyed at relatively high velocity and force. The floodway fringe contains those areas of the 1% annual chance floodplain that are outside the floodway and are subject to inundation but do not convey the floodwaters at a high velocity.

located within a 1% annual chance flood zone has a 26% chance of suffering flood damage during the term of a 30-year mortgage. Similarly, a 500-year flood has a 0.2% chance of occurring in a given year. The 500-year floodplain indicates areas of moderate flood hazard.

The Town has consistently participated in the NFIP since August 30, 1974 and intends to continue participation in the NFIP. SFHAs in North Canaan are delineated on a Flood Insurance Rate Map (FIRM) and Flood Insurance Study (FIS). The FIRM delineates areas within North Canaan that are vulnerable to flooding and was most recently published on January 2, 2008. The original FIS and FIRMs for flooding sources in the town were originally published in November 1988.

A regulatory floodplain with AE designation has been mapped along the Housatonic River and many of its tributaries including a portion of the Blackberry River. An AE designation has also been mapped along the Konkapot River. Areas identified as providing flood storage are identified with A Zone designations, meaning they are regulated as floodplain, but flood elevations have not been established.

According to the FIS, "one aspect of floodplain management involves balancing the economic gain from floodplain development against the resulting increase in flood hazard. For purposes of the NFIP, a floodway is used as a tool to assist local communities in this aspect of floodplain management. Under this concept, the area of the one percent annual chance floodplain is divided into a floodway and a floodway fringe. The floodway is the channel of a stream, plus any adjacent floodplain areas, that must be kept free of encroachment so that the base flood can be carried without substantial increases in flood height." Therefore, floodways are essential tools for local municipalities to utilize in determining minimum standards by either adopting them directly

or utilizing them as a basis for additional floodway studies. A floodway designation has been mapped along the Konkapot River and also along portions of the Housatonic River.

Refer to Figure 3-1 for the areas of North Canaan susceptible to flooding based on FEMA flood zones. Table 3-1 describes the various zones depicted on the FIRM panel for North Canaan.


Table 3-1 FIRM Zone Descriptions

Zone	Description			
A	An area with a 1% chance of flooding in any given year for which no base flood elevations (BFEs) have been determined.			
AE	An area with a 1% chance of flooding in any given year for which BFEs have been determined. This area may include a mapped floodway.			
Area Not Included	An area that is located within a community or county that is not mapped on any published FIRM.			
X	An area that is determined to be outside the 1% and 0.2% annual chance floodplains.			
X500	An area with a 0.2% chance of flooding in any given year, for which no base flood elevations have been determined.			
Floodway	Areas in Zone AE			

Flooding can occur in some areas with a higher frequency than those mapped by FEMA. This nuisance flooding occurs during heavy rains with a much higher frequency than those used to calculate the 1% annual chance flood event and often in different areas than those depicted on the FIRM panels. These frequent flooding events occur in areas with insufficient drainage; where conditions may cause flashy, localized flooding; and where poor maintenance may exacerbate drainage problems (see Section 3.5).

During large storms, the recurrence interval level of a flood discharge on a tributary tends to be greater than the recurrence interval level of the flood discharge on the main channel downstream. In other words, a 1% annual chance flood event on a tributary may only contribute to a 2% annual chance flood event downstream. This is due to the distribution of rainfall throughout large watersheds during storms and the greater hydraulic capacity of the downstream channel to convey floodwaters. Dams and other flood control structures can also reduce the magnitude of peak flood flows if prestorm storage is available.

The recurrence interval level of a precipitation event also generally differs from the recurrence interval level of the associated flood. An example would be Tropical Storm Floyd in 1999, which caused rainfall on the order of a 250-year event while flood frequencies were slightly greater than a 10-year event on the Naugatuck River in Beacon Falls, Connecticut. Flood events can also be mitigated or exacerbated by in-channel and soil conditions, such as low or high flows, the presence of frozen ground, or a deep or shallow water table, as can be seen in the following historic record.

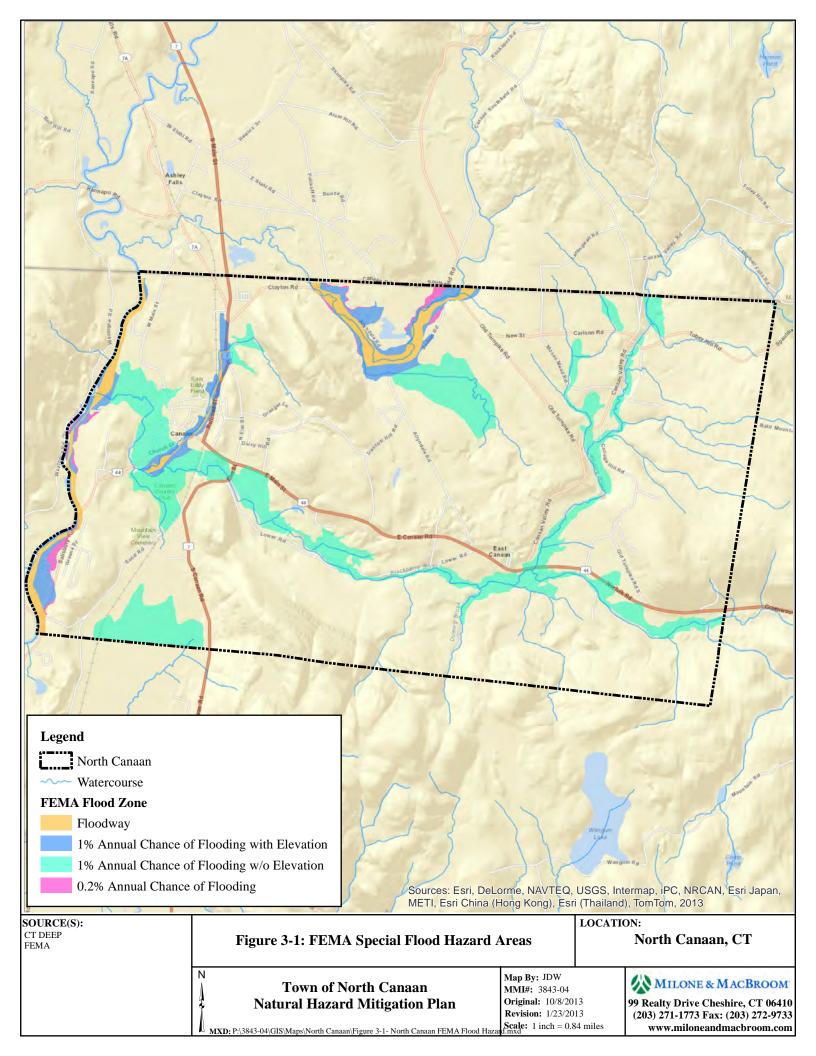

# 3.3 Historic Record

The town of North Canaan has experienced various degrees of flooding in every season of the year throughout its recorded history. Melting snow combined with early spring rains has caused frequent spring flooding. Numerous flood events have occurred in late summer to early autumn resulting from storms of tropical origin moving northeast along the Atlantic coast. Winter floods result from the occasional thaw, particularly during years of heavy snow or periods of rainfall on frozen ground. Other flood events have been caused by excessive rainfalls upon saturated soils, yielding greater than normal runoff.

In general, potential flooding problems in North Canaan are concentrated along Camp Brook with lesser areas of flood risk along the Housatonic, Blackberry and Konkapot Rivers. According to the 2008 Flood Insurance Study for the Town of North Canaan "flooding concerns in North Canaan center around development in the Camp Brook basin, which flows through Canaan Village and joins the Blackberry River just upstream from the Route 44 bridge. Additionally, flooding in the Blackberry River west of Church Street is exacerbated by backwater from the Housatonic River when it is in flood stage."

The most significant flooding in the recorded history of North Canaan was the flooding of 1955 associated with Hurricanes Connie and Diane. As noted in Section 4.3, Connie was a declining tropical storm over the Midwest when its effects hit Connecticut in August 1955, producing heavy rainfall of four to six inches across the state. The saturated soil conditions exacerbated the flooding caused by Tropical Storm Diane five days later, the wettest tropical cyclone on record for the northeast. The storm produced 14 inches of rain in a 30-hour period, causing destructive flooding conditions along nearly every major river system in the state. Flooding was particularly severe in the North Canaan area, with significant flooding along the Housatonic River and its tributaries.

According to the NCDC Storm Events Database, since 2000 there have been approximately 71 flooding and flash flooding events in Litchfield County. The following are descriptions of historic floods in or adjacent to the Town of North Canaan based on historic records and information in the NCDC Storm Events Database, supplemented by correspondence with municipal officials. Note that flooding was not necessarily limited to the described areas.

July 13, 1996- The remnants of Hurricane Bertha tracked from the mid-Atlantic region northeast to Quebec, Canada dropping 3 to 5 inches of rain across Litchfield County. This caused flooding of several streams throughout the county along with scattered power outages from wind-blown tree branches onto wires.
January 19-21, 1999- Mild weather and rain resulted in rapid melting of snow between January 19 <sup>th</sup> and 20 <sup>th</sup> in Litchfield County. Runoff as well as ice jams breaking up triggered flooding of the Housatonic and Pomperaug Rivers.
September 16, 1999- The remnants of Hurricane Floyd moved across the eastern seaboard on September 16 and the early hours of the 17 <sup>th</sup> dropping 5 to 8 inches of rainfall in northwestern Connecticut. Specific rainfall amounts included 5.20 inches at Falls Village, 6.35 inches at Colebrook Dam, 7.89 inches at Bulls Bridge and 8.28 inches at Bakersville. Wide spread flooding was prevalent across the region including the Housatonic and Shepaug Rivers and

	many small streams and tributaries. The rains proved to be destructive flooding and washing out portions of roadways including Route 7 in several areas.
	June 7-9, 2000- Severe rains dropped over Litchfield County totaling 3.53 inches at Bakersville, 3.87 inches at Bulls Bridge and 2.53 inches at Thomaston Dam. The runoff caused the Housatonic River to rise above flood stage between June 7 <sup>th</sup> and 9 <sup>th</sup> .
	July 16, 2000- Heavy rainfall ranged from three to locally more than five inches. Specific amounts included 3.66 inches at Bakersville, and 5.20 at Bulls Bridge. Flooding was also noted on State Highway Route 7 in neighboring Falls Village. Runoff from the heavy rains caused the Housatonic River to swell briefly above the seven foot flood stage at Falls Village.
	January 25, 2010- Heavy rainfall fell across Litchfield County and in addition, warm temperatures caused melting of the snow pack leading to excessive runoff. Flash flooding occurred as heavy rain fell on the frozen ground as well as reports of mud and rock slides. One and a half to two and a half inches of rain were reported across the county. Route 44 in neighboring Norfolk was closed due to a mudslide.
	March 7, 2011- After a combination of heavy rainfall and snowmelt due to mild temperatures, the result was widespread flooding of rivers, streams, roads and basements. Evacuations occurred in areas due to communities being cut off by flood waters from access to main roads. Sections of Route 7 were closed from the overflow of the Housatonic River from Kent to just south of the Veterans Bridge, Route 202, in New Milford.
	August 28-29, 2011- Tropical Storm Irene moved in north northeast across eastern New York and western New England producing widespread flooding due to extreme rainfall and heavy winds. Much of the rain had fallen within a 12 hour period and in Litchfield County totals ranged from 5 to 10 inches. Numerous road closures were reported due to flooding, downed trees and power lines causing some evacuations and widespread, long duration power outages. Winds gusted between 35 and 55 mph with stronger gusts exceeding 60 mph causing blow downs of tree with assistance of highly saturated soils. Approximately 25,000 customers were affected by power outages and a Major Disaster Declaration was declared by FEMA.
	September 6, 2011- Moderate flooding occurred on the Housatonic River in Litchfield County. The Falls Village river gage located near Water Street in Falls Village exceeded its 7 foot flood stage at 5 pm EST September 6th, its 10 foot moderate flood stage at 11:49 pm September 8th, it crested at 13.47 feet at 6 am September 9th, then remained above its moderate flood stage until 7:15 am September 11th, and finally fell below flood stage at 2:34 pm September 12th.
	North Canaan, Tropical Storm Irene caused flooding along Allendale Road and Old Turnpike ad, erosion of river banks, and downed trees and power lines.
T	-4 C194

3.4 Existing Capabilities

The Town through its land use regulations works to reduce future increases in flow associated with development.

#### Ordinances, Regulations, and Plans

Regulations, codes, and ordinances that apply to flood hazard mitigation in conjunction with and in addition to NFIP regulations include:

□ Floodplain Management Regulations: The Town's Flood Regulations were revised and amended in 2007 and were effective in January 2008. This separate set of regulations is essentially the town's local version of the NFIP regulations. The regulations address floodplain management, including establishing areas of special flood hazard, restrictions, development permit requirements, permitted uses, and standards for flood hazard reduction. The objectives of the regulations is to:

Protect human life and health; minimize expenditure of public money for costly flood control projects; minimize the need for rescue and relief efforts associated with flooding and generally undertaken at the expense of the general public; to minimize damage to public facilities, infrastructure and utilities...located in the floodplain; help maintain a stable tax base by providing for the sound use and development of flood prone areas in such a manner as to minimize flood blight areas; insure that potential buyers are notified that property is in a flood hazard area; prevent increase in flood heights that would increase flood damage and result in conflicts between property owners; ensure that those who occupy the flood hazard areas assume responsibility for their actions and to discourage development in a floodplain if there is any practical alternative to locate the activity, use or structure outside of the floodplain.

- Section 5.3 outlines specific standards for construction in Special Flood Hazard Areas,
   Zones A. A-1-30 and AE.
- Section 5.3.1.1 states that all new construction, substantial improvements, and repair to structures that have sustained substantial damage which are residential structures shall have the bottom of the lowest floor, including basement, elevated to or above the base flood elevation.
- Section 5.3.1.2 states that all new construction, substantial improvements, and repair to structures that have sustained substantial damage which are commercial, industrial or non-residential structures shall: (a) have the bottom of the lowest floor, including basement, elevated one foot above the base flood elevation (b) in lieu of being elevated, non-residential structures may be dry flood proofed to one foot above the base flood elevation provided that together with all attendant utilities and sanitary facilities the areas of the structure below the required elevation are water tight with walls substantially impermeable to the passage of water, and provided that such structures are composed of structural components having the capacity of resisting hydrostatic and hydrodynamic loads and the effects of buoyancy.
- ☐ Special Flood Hazard Areas, Ordinance: The Town's Flood Ordinance was adopted in 1988, the purpose of which is to:

"promote the public health; safety and general welfare and to minimize public and private losses due to flood conditions in specific areas by provisions designed to: restrict and prohibit uses which are dangerous to health safety and property due to water or erosion hazards; require that uses vulnerable to floods, including facilities which serve such uses, be protected against flood damage at the time of initial construction; control the alteration of natural floodplains, streams, channels, and natural protective barriers which are involved in accommodation of flood waters and prevent or regulate the construction of flood barriers which will unnaturally divert floodwaters or which may increase flood hazards to other lands."

The Ordinance states that no development to any improved or unimproved real estate within a special flood hazard area shall be made except upon permit issued by the Town's Conservation and Inland Wetlands Commission.

- □ Zoning Regulations. The Town of North Canaan Zoning Regulations were most recently updated in 2009 and have been enacted to "retain the general "quality of life" of North Canaan its residential character, its agricultural/industrial/ commercial economic base, historic heritage, and natural environment. At the same time to recognize the need for balanced growth at a pace and quality that does not upset this balance, while seeking to resolve problems that are incompatible with that quality of life; to promote and protect public health, safety and welfare; to encourage and facilitate the orderly growth and expansion of the Town in accordance with the adopted Town Plan of Development; to promote, protect and maintain a healthy agricultural economic base; to facilitate the adequate provision for transportation, public water, schools, parks and other public requirements; to protect the character and maintain the stability of residential, business and industrial areas within the Town; to provide for land uses, buildings and structures that are compatible with the town and its various neighborhoods."
- ☐ *Inland Wetlands and Watercourse Regulations*. These regulations were and were amended in 1975. The purpose of the inland wetlands and watercourses regulations is to protect the quality of the inland wetlands and watercourses within the town of North Canaan by making provisions for the protection, preservation, maintenance, and use of inland wetlands and watercourses, including deterring and inhibiting the danger of flood and pollution.
  - Section 1-11 defines "Regulated Activity" means any operation or activity within or use of a wetland or watercourse involving removal or deposition of material, or any obstruction, construction, alteration or pollution, of such wetlands or watercourses, except as otherwise indicated in Section 2 of these regulations.
  - Section 2.1 states that a residential home for which a building permit has been issued or on a subdivision lot, providing the permit has been issued or the subdivision approved as of the effective date of these regulations shall be permitted as of right.
  - Section 3 states that Subject to the provisions of Section 2 hereof, regulated activities
    affecting the wetlands and watercourses of the Town are prohibited except as they may
    be licensed by the Commission, as hereinafter provided.
- □ *Plan of Conservation and Development.* This 2006 document is the Town's vision statement for future development. It is updated every 10 years.

- Recreation, Open Space and Conservation (Page 37) encourage public or private acquisition of open space to preserve the character of the town and to provide parklands and areas for public recreation.
- Recreation, Open Space and Conservation (Page 37) recommends the preservation, as practical, of areas of the community that provide flood protection, ground water retention, wildlife refuge, or other inherent natural resources.
- Open Space/Conservation (Page 42) identifies floodplains, swampland/wetlands, streambelts and steep slopes as open space land that should remain undeveloped due to natural conditions.
- □ Subdivision Regulations. Adopted in 1971 and amended in 2005, the Town's Subdivision Regulations establish minimum acceptable standards for the manner in which land is broken up into building lots. The regulations also set forth standards for the provision and construction of roads, drainage, sewer facilities, water service and other site improvements necessary to serve building lots.
  - O Section III (5) states that any land to be subdivided shall be of such character that it can be used for building purposes without danger to health, safety, and general welfare. No land subject to flooding as defined by the Town Floodplain Ordinance and Conservation and Inland Wetlands Regulations shall be subdivided for residential purposes or for any other use which will aggravate the flood hazard.
  - O Section IV (3-A) outlines the application requirements and requires a determination from the Town Conservation and Inland Wetlands Commission as to whether or not inland wetlands as shown on the inland wetlands map or flood hazard areas as shown on the Town's FEMA Flood Hazard Boundary Map in effect at the time of application, are included in the land to be subdivided.
  - Section IV (3-F) requires the submittal an erosion and sedimentation control plan for any subdivision application which will involve a cumulative disturbed area that is more than one-half acre.

Overall, the intent of these regulations is to promote the public health, safety, and general welfare and to minimize public and private losses due to flood conditions in specific areas of the town of North Canaan by the establishment of standards designed to:

Protect human life and public health
Minimize expenditure of money for costly flood control projects
Minimize the need for rescue and relief efforts associated with flooding
Minimize prolonged business interruptions
Minimize damage to public facilities and utilities such as water and gas mains; electric,
telephone, and sewer lines; and streets and bridges located in floodplains
Maintain a stable tax base by providing for the sound use and development of floodprone
areas in such a manner as to minimize flood blight areas
Ensure that purchasers of property are notified of special flood hazards
Ensure the continued eligibility of owners of property in North Canaan for participation in the
NEID

#### NFIP, Flood Insurance, and Community Rating System

Mr. Douglas Humes, Jr., the Town First Selectman is currently the NFIP administrator for the Town and oversees the enforcement of NFIP regulations. The degree of flood protection established by the variety of regulations in the Town meets the minimum reasonable for regulatory purposes under the NFIP. The Town is not enrolled in the Community Rating System program.

#### Drainage and Street Flooding

There are areas of street flooding throughout the town, and these are addressed by the Highway

Department as necessary. The Highway Department is in charge of the maintenance of the town's drainage systems and performs clearing of bridges and culverts and other maintenance as needed. Drainage complaints are routed to the Office of the First Selectman and the Highway Department. The Town uses these reports to identify potential problems and plan for maintenance and upgrades.



Photo Source: Lakeville Journal

# Camp Brook

Town officials indicated that Camp Brook is the main source of flooding in town and noted that the culvert along this brook is State owned and needs to be replaced.

An April 10, 2014 article in the Lakeville Journal titled "So far so good on Camp Brook" discusses recent improvements along Camp Brook and noted that "a clean-out under the West Main Street Bridge appears to have prevented major flooding of roads and basements despite spring's high waters."

#### Communications

The National Weather Service issues a flood watch or a flash flood watch for an area when conditions in or near the area are favorable for a flood or flash flood, respectively. A flash flood watch or flood watch does not necessarily mean that flooding will occur. The National Weather Service issues a flood warning or a

The Town can access the National Weather Service website at http://www.weather.gov/ to obtain the latest flood watches and warnings before and during precipitation events.

flash flood warning for an area when parts of the area are either currently flooding, highly likely to flood, or when flooding is imminent.

The town utilizes the Alert Now/Blackboard Connect emergency notification system to direct geographically specific emergency notification telephone calls into affected areas.

#### **Natural Resource Protection**

According to the Plan of Conservation and Development, one important goal of the Town of North Canaan is to "encourage public or private acquisition of open space to preserve the

character of the town and to provide parklands and areas for public recreation." The plan also discusses the need to preserve areas that provide flood protection, groundwater retention, wildlife refuge and other natural resources. In addition, the plan identifies floodplains, swampland/wetlands, streambelts, and steep slopes as areas that should remain undeveloped due to natural conditions.

In summary, the Town primarily attempts to mitigate future flood damage and flood hazards by restricting building activities in floodprone areas. This process is carried out through both the Planning and Zoning and the Inland Wetlands Commissions. All watercourses are to be encroached minimally or not at all to maintain the existing flood-carrying capacity. These regulations rely primarily on the FEMA-defined 1% annual chance flood elevations to determine flood areas.

# 3.5 Vulnerabilities and Risk Assessment

This section discusses specific areas at risk to flooding within the town. Flooding can impact a variety of river corridors and cause severe damages in the town of North Canaan but most often occurs along Camp Brook. Flooding due to poor drainage and other factors is also a persistent hazard in the town and can cause minor infrastructure damage and create nuisance flooding of yards and basements.

#### 3.5.1 Vulnerability Analysis of Repetitive Loss Properties

Based on correspondence with the State of Connecticut NFIP Coordinator at the Connecticut DEEP, no repetitive loss properties (RLPs) are located in the town of North Canaan.

#### 3.5.2 Vulnerability Analysis of Critical Facilities

The list of critical facilities provided by the Town (Section 2.9) was used with the parcel data to accurately locate each critical facility throughout the town. One facility was found to be immediately adjacent to the 1% annual chance floodplain. Table 3-2 lists this critical facility.

Table 3-2 Critical Facilities Located Within the 1% Annual Chance Floodplain

Name or Type Address		Flooding Source	
North Canaan Firehouse	4 East Main Street	Blackberry River	

The North Canaan Firehouse is located on East Main Street. While this building is not known to have experienced serious flooding damage in recent years, its proximity to the Blackberry River makes it at risk to flooding. While this facility is susceptible to the 1% annual chance flood, it may also be susceptible to floods of lesser magnitude. Potential measures for mitigating future flooding damage at this critical facility is discussed in Section 3.6.2.

# 3.5.3 *HAZUS-MH* Vulnerability Analysis

HAZUS-MH is FEMA's loss estimation methodology software for flood, wind, and earthquake hazards. The software utilizes year 2000 U.S. Census data and a variety of engineering

information to calculate potential damages (specified in year 2006 United States dollars [USD]) to a user-defined region. The software was used to perform a basic analysis and generate potential damages to North Canaan from a 1% annual chance riverine flood event simultaneously occurring along Blackberry River, Camp Brook, Housatonic River, and Konkapot River. Hydrology and hydraulics for the streams and rivers were generated utilizing the Connecticut LiDAR 10-foot Digital Elevation Model based on LiDAR collected in the year 2000. The summary report is included in Appendix E. The following paragraphs discuss the results of the *HAZUS-MH* analysis.

The FEMA default values were used for each of the town's census blocks in the *HAZUS* simulation. Approximately \$330 million of total building replacement value were estimated to exist within the town of North Canaan. Of that total, the HAZUS 1% annual chance riverine flood event estimates a total building-related loss of \$11.09 million. A summary of the default building values is shown in Table 3-3.

Table 3-3
HAZUS-MH Flood Scenario – Basic Information

Occupancy	Dollar Exposure (2006 USD)
Residential	\$ 219,576,000
Commercial	\$ 59,176,000
Other	\$ 51,149,000
Total	\$ 329,901,000

The *HAZUS-MH* simulation estimates that during a 1% annual chance flood event, 12 buildings will be at least moderately damaged in the town <u>from flooding</u>. A total of four of these buildings will be substantially damaged and uninhabitable. Table 3-4 presents the expected damages based on building type.

Table 3-4

HAZUS-MH Flood Scenario – Building Stock Damages
Number of Structures Damaged

Occupancy	1-10%	11-20%	21-30%	31-40%	41-50%	Substantially
Occupancy	Damaged	Damaged	Damaged	Damaged	Damaged	Damaged
Residential	0	0	0	2	6	4
Commercial	0	0	0	0	0	0
Other	0	0	0	0	0	0
Total	0	0	0	2	6	4

*HAZUS-MH* utilizes a subset of critical facilities known as "essential facilities" that are important following natural hazard events. These include one hospital and one school. The software noted that under the 1% annual chance flood event, essential facilities would not suffer damage.

The *HAZUS-MH* simulation estimated that a total of 662 tons of debris would be generated by flood damage for the 1% annual chance flood scenario. It is estimated that 27 truckloads (at

approximately 25 tons per truck) will be required to remove the debris. The breakdown of debris is as follows:
<ul> <li>□ Finishes (drywall, insulation, etc.) comprise 61% of this total.</li> <li>□ Structural material (wood, brick, etc.) comprise 24% of the total.</li> <li>□ Foundation material (concrete slab, concrete block, rebar, etc.) would comprise the remaining 15%.</li> </ul>
HAZUS-MH calculated the potential sheltering requirement for the 1% annual chance flood event. The model estimates that 82 households will be displaced due to flooding. Displacement includes households evacuated from within or very near to the inundated areas. Of these households, 127 people are projected to seek temporary shelter in public shelters.
HAZUS-MH also calculated the predicted economic losses due to the 1% annual chance flood event. Economic losses are categorized as either building-related losses or business interruption losses. Building-related losses (damages to building, content, and inventory) are the estimated costs to repair or replace the damage caused to the building and its contents. Business interruption losses are those associated with the inability to operate a business because of the damage sustained during the flood and include lost income, relocation expenses, lost rentaincome, lost wages, and temporary living expenses for displaced people.
A total of \$11.06 million of building-related losses is expected. Building losses account for the building structure, contents, and inventory. As such, residential losses accounted for a total of \$5.15 million, commercial losses totaled \$4.9 million, and other (municipal and industrial) losses totaled \$0.98 million.
☐ Building-related economic losses of \$11.09 million are predicted if \$0.03 million in business interruption losses are included.
In summary, flooding is the most persistent hazard to affect the town of North Canaan. Based or the historic record and <i>HAZUS-MH</i> simulations of the 1% annual chance flood events, the SFHAs and other areas are vulnerable to flooding damages, which can include direct structural damages interruptions to business and commerce, emotional impacts, and injury or death.
Potential Mitigation Strategies and Actions
A number of measures can be taken to reduce the impact of a local or nuisance flood event. These include measures that prevent increases in flood losses by managing new development, measures that reduce the exposure of existing development to flood risk, and measures to preserve and restore natural resources. These are listed below under the categories of <i>prevention</i> , <i>property protection</i> , <i>structural projects</i> , <i>public education and awareness</i> , <i>natural resource protection</i> , and <i>emergency services</i> . All of the recommendations discussed in the subsections below are reprinted in a bulleted list in Section 3.7.

3.6

#### 3.6.1 Prevention

Prevention of damage from flood losses often takes the form of floodplain regulations and redevelopment policies that restrict the building of new structures within defined areas. These are usually administered by building, zoning, planning, and/or code enforcement offices through capital improvement programs and through zoning, subdivision, floodplain, and

It is important to promote coordination among the various departments that are responsible for different aspects of flood mitigation. Coordination and cooperation among departments should be reviewed every few years as specific responsibilities and staff change.

wetland ordinances. It also occurs when land is prevented from being developed through the use of conservation easements or conversion of land into open space. Ordinances pertinent to the Town were discussed in Section 3.4. The following are general recommendations for flood damage prevention:

<u>Open Space Creation and Preservation</u>: The town consists of numerous acres of protected forest and large open space parcels. The town plan of conservation and development recommends the preservation of swampland/wetlands such as Robbins Swamp, Squabble Brook and the Blackberry River.

The plan of conservation and development also states that large areas of State lands such as the Housatonic State Forest have been preserved in North Canaan. Other large open space areas throughout the town such as lakes, ponds, wetlands, and floodplains are protected by State and local laws.

<u>Planning and Zoning</u>: Zoning and floodplain regulations in North Canaan regulate development in flood hazard areas. Flood hazard areas should reflect a balance of development and natural areas although ideally they will be free from development. Policies also require the design and location of utilities to areas outside of flood hazard areas when applicable and the placement of utilities underground when possible. The Subdivision Regulations include criteria for stormwater management planning.

<u>Floodplain Development Regulations</u>: The Town's floodplain regulations require engineering review of all development applications in the floodplain.

Adherence to the State Building Code requires that the foundation of structures will withstand flood forces and that all portions of the building subject to damage are above or otherwise protected from flooding. Floodplain ordinances in the town require new or substantially improved residential construction to have the bottom of the lowest floor, including the basement, elevated to or above the base flood elevation. Non-residential construction must have the lowest floor, including the basement, elevated one foot above the base flood elevation.

FEMA encourages communities to use more accurate topographic maps to expand upon the FIRMs published by FEMA. This is because many FIRMs were originally created using USGS quadrangle maps with 10-foot contour intervals, but many municipalities today have contour maps of one- or two-foot intervals that show more recently constructed roads,

Adoption of a different floodplain map is allowed under NFIP regulations as long as the new map covers a larger floodplain than the FIRM. It should be noted that the community's map will not affect the current FIRM or alter the SFHA used for setting insurance rates or making map determinations; it can only be used by the community to regulate floodplain areas. The FEMA Region I office has more information on this topic. Contact information can be found in Section 11.

bridges, and other anthropologic features. An alternate approach is to record high water marks and establish those areas inundated by a recent severe flood to be the new regulatory floodplain.

Reductions in floodplain area or revisions of a mapped floodplain can only be accomplished through revised FEMA-sponsored engineering studies or Letters of Map Change (LOMC).

Stormwater Management Policies: Development and redevelopment policies to address the prevention of flood damage must include effective stormwater management policies. Developers in North Canaan are required to build detention and retention facilities where appropriate, and criteria for design are outlined in the Town's Subdivision Regulations. Additional techniques include enhancing infiltration to reduce runoff volume through the use of swales, infiltration trenches, vegetative filter strips, and permeable paving blocks. The goal is that post development stormwater does not leave a site at a rate higher than under predevelopment conditions.

Standard engineering practice is to avoid the use of detention measures if the project site is located in the lower one-third of the overall watershed. The effects of detention are least effective and even detrimental if used at such locations because of the delaying effect of the peak discharge from the site that typically results when detention measures are used. By detaining stormwater in close proximity to the stream in the lower reaches of the overall watershed, the peak discharge from the site will occur later in the storm event, which will more closely coincide with the peak discharge of the stream, thus adding more flow to the peak discharge during any given storm event.

<u>Drainage System Maintenance</u>: An effective drainage system must be continually maintained to ensure efficiency and functionality. The use of GIS technology can greatly aid the identification and location of problem areas. The Town currently has an "as-needed" schedule of drainage system maintenance. Maintenance includes programs to clean out blockages caused by overgrowth and debris. The Connecticut Department of Transportation (CTDOT) is responsible for maintenance along the state roadways.

Education and Awareness: Other prevention techniques include the promotion of awareness of natural hazards among citizens, property owners, developers, and local officials. Technical assistance for local officials, including workshops, can be helpful in preparation for dealing with the massive upheaval that can accompany a severe flooding event. Research efforts to improve knowledge, develop standards, and identify and map hazard areas will better prepare a community to identify relevant hazard mitigation efforts. The Town has a variety of information available to citizens regarding flooding and flood damage prevention.

<u>Wetlands</u>: The Town Conservation and Inland Wetlands and Watercourse Commission administers the Wetland Regulations, and the Planning and Zoning Commission administers the Zoning Regulations. The regulations simultaneously restrict development in floodplains, wetlands, and other floodprone areas. The Town may consider developing a checklist that cross references the bylaws, regulations, and codes related to flood damage prevention that may be applicable to a proposed project and make this list available to potential applicants.

#### 3.6.2 Property Protection

A variety of steps can be taken to protect existing public and private properties from flood damage. Potential measures for property protection include:

- □ Relocation of structures at risk for flooding to a higher location on the same lot or to a different lot outside of the floodplain. Moving an at-risk structure to a higher elevation can reduce or eliminate flooding damages to the structure. If the structure is relocated to a new lot, the former lot can be converted to open space in a manner similar to that described under the Acquisition section above.
- □ *Elevation of the structure*. Home elevation involves the removal of the building structure from the basement and elevating it on piers to a height such that the first floor is located above the 1% annual chance flood level. The basement area is abandoned and filled to be no higher than the existing grade. All utilities and appliances located within the basement must be relocated to the first floor level.
- □ Construction of property improvements such as barriers, floodwalls, and earthen berms. Such structural projects can be used to prevent shallow flooding. There may be properties within the town where implementation of such measures will serve to protect structures.
- □ *Performing structural improvements that can mitigate flooding damage*. Such improvements can include:
  - Dry floodproofing of the structure to keep floodwaters from entering. Walls may be coated with compound or plastic sheathing. Openings such as windows and vents would be either permanently closed or covered with removable shields. Flood protection should extend only two to three feet above the top of the concrete foundation because building walls and floors cannot withstand the pressure of deeper water.
  - ⇒ Wet floodproofing of the structure to allow floodwaters to pass through the lower area of the structure unimpeded. Wet floodproofing should only be used as a last resort. If considered, furniture and electrical appliances should be moved away or elevated above the 1% annual chance flood elevation.

<u>Dry floodproofing</u> refers to the act of making areas below the flood level watertight.

<u>Wet floodproofing</u> refers to intentionally letting floodwater into a building to equalize interior and exterior water pressures.

⇒ *Performing other potential home improvements to mitigate damage from flooding*. FEMA suggests several measures to protect home utilities and belongings, including:

- o Relocate valuable belongings above the 1% annual chance flood elevation to reduce the amount of damage caused during a flood event.
- o Relocate or elevate water heaters, heating systems, washers, and dryers to a higher floor or to at least 12 inches above the high water mark (if the ceiling permits). A wooden platform of pressure-treated wood can serve as the base.
- o Anchor the fuel tank to the wall or floor with noncorrosive metal strapping and lag bolts.
- o Install a backflow valve to prevent sewer backup into the home.
- o Install a floating floor drain plug at the lowest point of the lowest finished floor.
- o Elevate the electrical box or relocate it to a higher floor and elevate electric outlets to at least 12 inches above the high water mark.
- □ Encouraging property owners to purchase flood insurance under the NFIP and to make claims when damage occurs. While having flood insurance will not prevent flood damage, it will help a family or business put things back in order following a flood event. Property owners should be encouraged to submit claims under the NFIP whenever flooding damage occurs in order to increase the eligibility of the property for projects under the various mitigation grant programs.

All of the above *property protection* mitigation measures may be useful for town of North Canaan residents to prevent damage from inland and nuisance flooding. The Building Official should be prepared to provide outreach and education in these areas where appropriate.

# 3.6.3 Emergency Services

A hazard mitigation plan addresses actions that can be taken before a disaster event. In this context, emergency services that would be appropriate mitigation measures for flooding include:

Forecasting systems to provide information on the time of occurrence and magnitude of
flooding
A system to issue flood warnings to the community and responsible officials
Emergency protective measures, such as an Emergency Operations Plan outlining procedures
for the mobilization and position of staff, equipment, and resources to facilitate evacuations
and emergency floodwater control
Implementing an emergency notification system that combines database and GIS mapping
technologies to deliver outbound emergency notifications to geographic areas or specific
groups of people, such as emergency responder teams

Some of these mitigation measures are already in place in the Town. Additional proposals common to all hazards in this Plan for improving emergency services are recommended in Section 10.1.

#### 3.6.4 Public Education and Awareness

The objective of public education is to provide an understanding of the nature of flood risk and the means by which that risk can be mitigated on an individual basis. Public information materials should encourage individuals to be aware of flood mitigation techniques, including discouraging the public from modifying channels and/or detention basins in their yards and dumping in or otherwise altering watercourses and storage basins. Individuals should be made

aware of drainage system maintenance programs and other methods of mitigation. The public should also understand what to expect when a hazard event occurs and the procedures and time frames necessary for evacuation.

Based on the above guidelines, a number of specific proposals for improved *public education* are recommended to prevent damage from flooding. These are common to all hazards in this Plan and are listed in Section 10.1.

#### 3.6.5 Natural Resource Protection

Floodplains can provide a number of natural resources and benefits, including storage of floodwaters, open space and recreation, water quality protection, erosion control, and preservation of natural habitats. Retaining the natural resources and functions of floodplains can not only reduce the frequency and consequences of flooding but also minimize stormwater management and nonpoint pollution problems. Through natural resource planning, these objectives can be achieved at substantially reduced overall costs.

Measures for preserving floodplain functions and resources typically include:

Adoption and enforcement of floodplain regulations to control or prohibit development that will alter natural resources
Development and redevelopment policies focused on resource protection
Information and education for both community and individual decision makers
Review of community programs to identify opportunities for floodplain preservation

Projects that improve the natural condition of areas or to restore diminished or destroyed resources can reestablish an environment in which the functions and values of these resources are again optimized. Acquisitions of floodprone property with conversion to open space are the most common of these types of projects. Administrative measures that assist such projects include the development of land reuse policies focused on resource restoration and review of community programs to identify opportunities for floodplain restoration.

Based on the above guidelines, the following specific *natural resource protection* mitigation measures are recommended to help prevent damage from inland and nuisance flooding:

Pursue the acquisition of additional open space properties as discussed in the <i>Plan of</i>
Conservation and Development.
Selectively pursue conservation objectives listed in the Plan of Conservation and
Development and/or more recent planning studies and documents.
Continue to regulate development in protected and sensitive areas, including steep slopes
wetlands, and floodplains.
-

#### 3.6.6 Structural Projects

Structural projects include the construction of new structures or modification of existing structures (e.g., floodproofing) to lessen the impact of a flood event. Examples of structural projects include:

Stormwater controls such as drainage	e systems,	detention	dams	and	reservoirs,	and	culvert
resizing can be employed to modify	flood flow	rates.					

□ On-site detention can provide temporary storage of stormwater runoff.

	Barriers such as levees, floodwalls, and dikes physically control the hazard to protect certain areas from floodwaters.  Channel alterations can be made to confine more water to the channel and modify flood flows.  Individuals can protect private property by raising structures and constructing walls and levees around structures.
	re should be taken when using these techniques to ensure that problems are not exacerbated in er areas of the impacted watersheds.
Sur	mmary of Specific Strategies and Actions
	tile many potential mitigation activities were addressed in Section 3.6, the recommended igation strategies for addressing flooding problems in the town of North Canaan are listed ow.
Pre	vention
	Consider requiring at least one foot of freeboard to the Floodplain Management Regulations. Require developers to demonstrate whether detention or retention of stormwater is the best option for reducing peak flows downstream of a project and provide a design for the appropriate alternative.
Pro	perty Protection
<u> </u>	Consider conducting a Camp Brook watershed study to identify appropriate methods of reducing flood risks.  Encourage property owners to purchase flood insurance under the NFIP and to report claims when flooding damage occurs.  Evaluate floodprone properties such as the North Canaan Firehouse to determine potential flood damage reduction methods.  Consider elevations or acquisitions of homes along Camp Brook that are prone to flooding.
Pul	olic Education
	Compile a checklist that cross-references the bylaws, regulations, and codes related to flood damage prevention that may be applicable to a proposed project and make this list available to potential applicants. The information in Section 3.4 provides a starting point for this list.
	Provide outreach regarding home elevation and relocation, flood barriers, dry floodproofing, wet floodproofing, and other home improvement techniques (Section 3.6.2) to private homeowners and businesses with flood risk.
	Provide outreach regarding which types of mitigation options are appropriate for reducing flood insurance premiums [this is based on a comment provided by one of the survey participants from North Canaan].
	Ensure that the appropriate municipal personnel are trained in flood damage prevention methods.

**3.7** 

# Natural Resource Protection ☐ Pursue the acquisition of additional municipal open space inside SFHAs and set it aside as greenways, parks, or other nonresidential, noncommercial, or nonindustrial use. ☐ Selectively pursue conservation recommendations listed in the Plan of Conservation and Development and other studies and documents. Structural Projects ☐ Review culvert conveyances based on existing hydrology and Northeast Regional Climate Center guidance. ☐ When replacing or upgrading culverts, work with CT DOT to incorporate findings of the climate change pilot study and work with HVA to incorporate findings of the stream crossing assessment training. ☐ Consider evaluating drainage issues through the town and develop a list of culverts to replace and increase capacities. ☐ Replace and increase the capacity of the Route 44 culvert at Church Street. ☐ Work with the State to replace and increase the capacity of the Camp Brook culvert. **Emergency Services** ☐ Ensure adequate barricades are available to block flooded areas in floodprone areas of the town. ☐ Evaluate flood risks in the vicinity of the North Canaan Firehouse to determine if mitigation

In addition, mitigation strategies important to all hazards are included in Section 10.1.

floodwall, floodproofing the building or relocating facilities onsite.

actions are necessary. Potential mitigation actions may include construction of a berm or

#### 4.0 HURRICANES AND TROPICAL STORMS

# 4.1 **Setting**

Several types of hazards may be associated with tropical storms and hurricanes including heavy or tornado winds, heavy rains, and flooding. While only some of the areas of North Canaan are susceptible to flooding damage caused by hurricanes, wind damage can occur anywhere in the town. Hurricanes, therefore, have the potential to affect any area within the town of North Canaan. A hurricane striking North Canaan is considered a possible event each year and could cause critical damage to the town and its infrastructure.

#### 4.2 Hazard Assessment

Hurricanes are a class of tropical cyclones that are defined by the National Weather Service as warm-core, nonfrontal, low-pressure, large-scale systems that develop over tropical or subtropical water and have definite organized circulations. Tropical cyclones are categorized based on the speed of the sustained (one-minute average) surface wind near the center of the storm. These categories are Tropical Depression (winds less than 39 miles per hour [mph]), Tropical Storm (winds 39-74 mph, inclusive), and Hurricanes (winds at least 74 mph).

The geographic areas affected by tropical cyclones are called tropical cyclone basins. The Atlantic tropical cyclone basin is one of six in the world and includes much of the North Atlantic Ocean, the Caribbean Sea, and the Gulf of Mexico. The official Atlantic hurricane season begins on June 1 and extends through November 30 of each year although occasionally hurricanes occur outside this period.

Inland Connecticut is vulnerable to hurricanes despite moderate hurricane occurrences when compared with other areas within the Atlantic tropical cyclone basin. Since hurricanes tend to weaken within 12 hours of landfall, inland areas are relatively less susceptible to hurricane wind damages than coastal areas in Connecticut; however, the heaviest rainfall often occurs inland as was seen in Tropical Storm Irene in 2011. Therefore, inland areas are vulnerable to riverine and urban flooding during a hurricane.

#### The Saffir-Simpson Scale

The "Saffir-Simpson Hurricane Scale" was used prior to 2009 to categorize hurricanes based upon wind speed, central pressure, and storm surge, relating these components to damage potential. In 2009, the scale was revised and is now called the "Saffir-Simpson Hurricane Wind Scale." The modified scale is more scientifically defensible and is predicated only on surface wind speeds. The following descriptions are from the 2014 *Connecticut Natural Hazard Mitigation Plan Update*.

A <u>Hurricane Watch</u> is an advisory for a specific area stating that a hurricane poses a threat to coastal and inland areas. Individuals should keep tuned to local television and radio for updates.

A <u>Hurricane Warning</u> is then issued when the dangerous effects of a hurricane are expected in the area within 24 hours.

<b>Category One Hurricane:</b> Sustained winds 74-95 mph (64-82 kt). Minimal Damage: Damage is primarily to shrubbery, trees, foliage, and unanchored mobile homes. No real damage occurs in building structures. Some damage is done to poorly constructed signs.
<b>Category Two Hurricane:</b> Sustained winds 96-110 mph (83-95 kt). Moderate Damage: Considerable damage is done to shrubbery and tree foliage, some trees are blown down. Major structural damage occurs to exposed mobile homes. Extensive damage occurs to poorly constructed signs. Some damage is done to roofing materials, windows, and doors; no major damage occurs to the building integrity of structures.
Category Three Hurricane: Sustained winds 111-130 mph (96-113 kt). Extensive damage: Foliage torn from trees and shrubbery; large trees blown down. Practically all poorly constructed signs are blown down. Some damage to roofing materials of buildings occurs, with some window and door damage. Some structural damage occurs to small buildings, residences and utility buildings. Mobile homes are destroyed. There is a minor amount of failure of curtain walls (in framed buildings).
<b>Category Four Hurricane:</b> Sustained winds 131-155 mph (114-135 kt). Extreme Damage: Shrubs and trees are blown down; all signs are down. Extensive roofing material and window and door damage occurs. Complete failure of roofs on many small residences occurs, and there is complete destruction of mobile homes. Some curtain walls experience failure.
Category Five Hurricane: Sustained winds greater than 155 mph (135 kt). Catastrophic Damage: Shrubs and trees are blown down; all signs are down. Considerable damage to roofs of buildings. Very severe and extensive window and door damage occurs. Complete failure of roof structures occurs on many residences and industrial buildings, and extensive shattering of glass in windows and doors occurs. Some complete buildings fail. Small buildings are overturned or blown away. Complete destruction of mobile homes occurs.

#### 4.3 Historic Record

Through research efforts by the National Oceanic and Atmospheric Administration's (NOAA) National Climate Center in cooperation with the National Hurricane Center, records of tropical cyclone occurrences within the Atlantic cyclone basin have been compiled from 1851 to present. These records are compiled in NOAA's hurricane database (HURDAT), which contains historical data recently reanalyzed to current scientific standards as well as the most current hurricane data. During HURDAT's period of record (1851-2011), one Category Three Hurricane, five Category Two Hurricanes, eight Category One Hurricanes, and 42 tropical storms have tracked within a 150-nautical-mile radius of North Canaan. The representative storm strengths were measured as the peak intensities for each individual storm passing within the 150-mile radius. The 14 hurricanes noted above occurred in August through October as noted in Table 4-1.

Table 4-1
Tropical Cyclones by Month Within 150 Miles of North Canaan Since 1851

Category	June	July	August	September	October
Tropical Storm <sup>1</sup>	4	1	11	14	8
One	0	0	2	4	2
Two	0	0	3	2	0
Three	0	0	0	1	0
Total	4	1	16	21	10

<sup>&</sup>lt;sup>1</sup>Three tropical storms occurred in May and one occurred in November.

A description of more recent tropical cyclones near North Canaan follows:

□ The most devastating hurricane to strike Connecticut, and believed to be the strongest hurricane to hit New England in recorded history, is believed to have been a Category Three Hurricane at its peak. Dubbed the "Long Island Express of September 21, 1938," this name was derived from the unusually high forward speed of the hurricane (estimated to be 70 mph). As a Category Two Hurricane, the center of the storm passed over Long Island, made landfall near Milford, Connecticut, and moved quickly northward into northern New England.

The majority of damage was caused from storm surge and wind damage. Surges up to 18 feet were recorded along portions of the Connecticut coast, and 130 mile per hour gusts flattened forests, destroyed nearly 5,000 cottages, farms, and homes, and damaged an estimated 15,000 more throughout New York and southern New England. The storm resulted in catastrophic fires in New London and Mystic, Connecticut. Fourteen to 17 inches of rain were reported in central Connecticut, causing severe flooding. Overall, the storm left an estimated 564 dead, 1,700 injured, and caused physical damages in excess of \$38 million (1938 USD).

- □ The "Great Atlantic Hurricane" hit the Connecticut coast in September 1944. This storm was a Category Three Hurricane at its peak intensity but was a Category One Hurricane when its center passed over eastern Long Island and made landfall near New London, Connecticut. The storm brought rainfall in excess of six inches to most of the state and rainfall in excess of eight to 10 inches in Fairfield County. Most of the wind damage from this storm occurred in southeastern Connecticut although wind gusts of 109 mph were reported in Hartford, Connecticut. Injuries and storm damage were lower in this hurricane than in 1938 because of increased warning time and fewer structures located in vulnerable areas due to the lack of rebuilding after the 1938 storm.
- ☐ Another Category Two Hurricane, Hurricane Carol (naming of hurricanes began in 1950), made landfall near Clinton, Connecticut in late August of 1954 shortly after high tide and produced storm surges of 10 to 15 feet in southeastern Connecticut. This storm was also a Category Three Hurricane at peak intensity. Rainfall amounts of six inches were recorded in New London, and wind gusts peaked at over 100 mph. Near the coast, the combination of strong winds and storm surge damaged or destroyed thousands of buildings, and the winds toppled trees that left most of the eastern part of the state without power. Overall damages in the northeast were estimated at one billion dollars (1954 USD), and 48 people died as a direct result of the hurricane.

Hurricane Edna was a Category Two Hurricane when its center passed southeast of Long Island in September 1954.
The year 1955 was a devastating year for flooding in Connecticut. Connie was a declining tropical storm over the Midwest when its effects hit Connecticut in August 1955, producing heavy rainfall of four to six inches across the state. The saturated soil conditions exacerbated the flooding caused by Tropical Storm Diane five days later, the wettest tropical cyclone on record for the northeast. The storm produced 14 inches of rain in a 30-hour period, causing destructive flooding conditions along nearly every major river system in the state.
Hurricane Donna of 1960 was a Category Four Hurricane when it made landfall in southwestern Florida and weakened to a Category Two hurricane when it made landfall near Old Lyme, Connecticut.
Hurricane Belle of August 1976 was a Category One Hurricane as it passed over Long Island but was downgraded to a tropical storm before its center made landfall near Stratford, Connecticut. Belle caused five fatalities and minor shoreline damage.
Hurricane Gloria of September 1985 was a Category Three Hurricane when it made landfall in North Carolina and weakened to a Category Two Hurricane before its center made landfall near Bridgeport, Connecticut. The hurricane struck at low tide, resulting in low to moderate storm surges along the coast. The storm produced up to six inches of rain in some areas and heavy winds that damaged structures and uprooted thousands of trees. The amount and spread of debris and loss of power were the major impacts from this storm, with over 500,000 people suffering significant power outages.
Hurricane Bob was a Category Two Hurricane when its center made landfall in Rhode Island in August 1991. The hurricane caused storm surge damage along the Connecticut coast but was more extensively felt in Rhode Island and Massachusetts. Heavy winds were felt across eastern Connecticut with gusts up to 100 mph and light to moderate tree damage. The storm was responsible for six deaths in the state. Total damage in southern New England was approximately \$680 million (1991 USD).
Tropical Storm Floyd seriously impacted Connecticut in 1999. Floyd was the storm of record in the Connecticut Natural Hazard Mitigation Plan and is discussed in more detail in Section 3.3 due to heavy rainfall that caused widespread flood damage. The winds associated with Tropical Storm Floyd also caused power outages throughout New England and at least one death in Connecticut.
Hurricane Irene peaked as a Category Three storm before it made landfall in North Carolina and tracked northward along the Delmarva Peninsula and New Jersey before the remnants of the eye crossed over New York Town on Sunday, August 28, 2011. Anticipating storm surges along the Atlantic coastline, many states and municipalities issued mandatory evacuations on August 26 and 27, 2011.

Photo Source: Lakeville Journal

Many coastal towns ordered a mandatory evacuation to all residents in anticipation of Hurricane Irene's landfall on Saturday, August 27, 2011. The largest damage was done to electrical lines throughout the state of Connecticut. More than half of the state (over 754,000 customers) was without power following the storm, with some areas not having electricity restored for more than a week. Ten deaths were attributed to the storm in Connecticut. In North Canaan, Hurricane Irene caused downed trees (as shown in the photo above), power lines and widespread power outages.

☐ Hurricane Sandy struck the Connecticut shoreline as a Category 1 Hurricane in late October 2012, causing power outages for 600,000 customers and at least \$360 million in damages in Connecticut. North Canaan fared pretty well during Hurricane Sandy and no major damages were reported.

# 4.4 Existing Capabilities

# <u>Flooding</u>

Existing mitigation measures appropriate for flooding were discussed in Section 3.0. These include the ordinances, codes, and regulations that have been enacted to minimize flood damage. In addition, various structures exist to protect certain areas, including dam and local flood protection projects.

#### Wind

Wind loading requirements are addressed through the state building code. The 2005 Connecticut State Building Code was amended in 2011 and adopted with an effective date of October 6, 2011; and subsequently amended to adopt the 2009 International Residential Code (IRC), effective February 28, 2014. The code specifies the design wind speed for construction in all the Connecticut municipalities, with the addition of split zones for some towns. For example, for towns along the Merritt Parkway such as Fairfield and Trumbull, wind speed criteria are different north and south of the parkway in relation to the distance from the shoreline. Effective December 31, 2005, the design wind speed for North Canaan is 90 miles per hour. North Canaan has adopted the Connecticut Building Code as its building code.

Connecticut is located in FEMA Zone II regarding maximum expected wind speed. The maximum expected wind speed for a three-second gust is 160 mph. This wind speed could occur as a result of either a hurricane or a tornado in western Connecticut and southeastern New York. The American Society of Civil Engineers recommends that new buildings be designed to withstand this peak three-second gust.

Parts of tall and older trees may fall during heavy wind events, potentially damaging structures, utility lines, and vehicles. Connecticut Light & Power, the local electric utility, provides tree maintenance near its power lines. Connecticut Light & Power was under intense scrutiny after storms Irene and Alfred in 2011. However, the town has a good relationship with CL&P and more proactive maintenance has been conducted in recent years.

Corey Bush is the tree warden and assists in managing all trees on Town-owned property, including within the street rights-of-way. With its limited budget, the town tends to focus on the most critical roadways.

During emergencies, the Town currently has two designated emergency shelters available for residents as discussed in Section 2.9.

During Tropical Storm Irene, the Town used the Alert Now/Blackboard Connect emergency notification system to notify all residents in the SFHA that they may evacuate and use one of the shelters. Prior to severe storm events, the Town ensures that warning/notification systems and communication equipment are working properly and prepares for the possible evacuation of impacted areas.

# 4.5 Vulnerabilities and Risk Assessment

NOAA issues an annual hurricane outlook to provide a general guide to each upcoming hurricane season based on various climatic factors. However, it is impossible to predict exactly when and where a hurricane will occur. NOAA believes that "hurricane landfalls are largely determined by the weather patterns in places the hurricane approaches, which are only predictable within several days of the storm making landfall."

NOAA has utilized the National Hurricane Center Risk Analysis Program (HURISK) to determine return periods for various hurricane categories at locations throughout the United States. As noted on the NOAA website, hurricane return periods are the frequency at which a certain intensity or category of hurricane can be expected with 75 nautical miles of a given location. For example, a return period of 20 years for a particular category storm means that on average during the previous 100 years a storm of that category passed within 75 nautical miles of that location five times. Thus, it is expected that similar category storms would pass within that radius an additional five times during the next 100 years.

Table 4-2 presents return periods for various category hurricanes to impact Connecticut. The nearest two HURISK analysis points were New York City and Block Island, Rhode Island. For this analysis, these data are assumed to represent western Connecticut and eastern Connecticut, respectively.

Table 4-2
Return Period (in Years) for Hurricanes to Strike Connecticut

Category New York City (Western Connecticut)		Block Island, Rhode Island (Eastern Connecticut)		
One	17	17		
Two	39	39		
Three	68	70		
Four	150	160		
Five	370	430		

According to the 2014 Connecticut Natural Hazard Mitigation Plan Update, hurricanes have the greatest destructive potential of all natural disasters in Connecticut due to the potential combination of high winds, storm surge and coastal erosion, heavy rain, and flooding that can accompany the hazard. It is generally believed that New England is long overdue for another major hurricane strike. As shown in Table 4-2, NOAA estimates that the return period for a Category Two or Category Three storm to strike Litchfield County to be 39 years and 68 years,

respectively. The last major hurricane to impact Connecticut was Hurricane Bob in 1991. Category One Hurricane Earl in 2010 and Tropical Storms Irene in 2011 and Hurricane Sandy in 2012 were reminders that hurricanes do track close to Connecticut.

The 2014 Connecticut Natural Hazard Mitigation Plan Update also notes that some researchers have suggested that the intensity of tropical cyclones has increased over the last 35 years, with some believing that there is a connection between this increase in intensity and climate change. While most climate simulations agree that greenhouse warming enhances the frequency and intensity of tropical storms, models of the climate system are still limited by resolution and computational ability. However, given the past history of major storms and the possibility of increased frequency and intensity of tropical storms due to climate change, it is prudent to expect that there will be hurricanes impacting Connecticut in the near future that may be of greater frequency and intensity than in the past.

#### Tropical Cyclone Vulnerability

In general, as the residents and businesses of the state of Connecticut become more dependent on the internet and mobile communications, the impact of hurricanes on commerce will continue to increase. A major hurricane has the potential of causing complete disruption of power and communications for up to several weeks, rendering electronic devices and those that rely on utility towers and lines inoperative.

Debris such as signs, roofing material, and small items left outside become flying missiles in hurricanes. Extensive damage to trees, towers, aboveground and underground utility lines (from uprooted trees or failed infrastructure), and fallen poles cause considerable disruption for residents. Streets may be flooded or blocked by fallen branches, poles, or trees, preventing egress. Downed power lines from heavy winds can also start fires during hurricanes with limited rainfall.

The town of North Canaan is vulnerable to hurricane damage from wind and flooding and from any tornadoes accompanying the storm. In fact, most of the damage to the town from historical tropical cyclones has been due to the effects of flooding. Fortunately, North Canaan is less vulnerable to hurricane damage than coastal towns in Connecticut because it does not need to deal with the effects of storm surge.

Factors that influence vulnerability to tropical cyclones in the town include building codes currently in place, local zoning and development patterns, and the age and number of structures located in highly vulnerable areas of the community.

All areas of growth and development increase the town's vulnerability to natural hazards such as hurricanes although new development is expected to mitigate potential damage by meeting the standards of the most recent building code. As noted in Section 4.1, wind damage from hurricanes and tropical storms has the ability to affect all areas of North Canaan while areas susceptible to flooding are even more vulnerable. Areas of known and potential flooding problems are discussed in Section 3.0, and tornadoes (which sometimes develop during tropical cyclones) will be discussed in Section 5.0.

The Town is uncertain whether any Town-owned critical facilities have wind-mitigation measures installed to specifically reduce the effects of wind. Thus, it is believed that nearly all of the critical facilities in the town are as likely to be damaged by hurricane-force winds as any other. Many of the

Some critical facilities are more susceptible than others to flooding damage associated with hurricane rainfall. Such facilities susceptible to flooding were discussed in Section 3.5.

Town's older structures, such as the Town Hall may not meet current building code with respect to wind.

North Canaan's housing stock consists of historic buildings greater than 50 and sometimes 100 years old, relatively younger buildings built before 1990 when the building code changed to address wind damage, and relatively recent buildings that utilize the new code changes. Since most of the existing housing stock in the town predates the recent code changes, many structures are highly susceptible to roof and window damage from high winds. Homes located within SFHAs are also at risk from flooding as a result of the heavy rainfall that typically occurs during tropical storms and hurricanes.

As the town of North Canaan is not affected by storm surge, hurricane sheltering needs have not been calculated by the U.S. Army Corps of Engineers for the town. The Town determines sheltering need based upon areas damaged or needing to be evacuated within the town. Under limited emergency conditions, a high percentage of evacuees will seek shelter with friends or relatives rather than go to established shelters. During extended power outages, it is believed that only 10% to 20% of the affected population of the town will relocate while most will stay in their homes until power is restored. In the case of a major (Category Three or above) hurricane, it is likely that the Town will depend on state and federal aid to assist sheltering displaced populations until normalcy is restored.

# **HAZUS-MH Simulation**

In order to quantify potential hurricane damage, HAZUS-MH simulations were run for historical and probabilistic storms that could theoretically affect North Canaan. For the historical simulations, the results estimate the potential maximum damage that would occur in the present day (based on year 2006 dollar values using year 2000 census data) given the same storm track and characteristics of each event. The probabilistic storms estimate the potential maximum damage that would occur based on wind speeds of varying return periods. Note that the simulations calculate damage for wind effects alone and not damages due to flooding or other non-wind effects. Thus, the damage and displacement estimates presented below are likely lower than would occur during a hurricane associated with severe rainfall. Results are presented in Appendix E and summarized below.

Figure 4-1 depicts the spatial relationship between the two historical storm tracks used for the HAZUS simulations (Hurricane Gloria in 1985 and the 1938 hurricane) and North Canaan. These two storm tracks produced the highest winds to affect North Canaan out of all the hurricanes in the HAZUS-MH software.

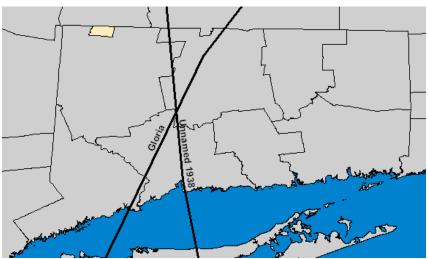


Figure 4-1: Historical Hurricane Storm Tracks

The FEMA default values were used for each census tract in the HAZUS simulations. A summary of the default building counts and values was shown in Table 3-3.

The FEMA *Hurricane Model HAZUS-MH Technical Manual* outlines various damage thresholds to classify buildings damaged during hurricanes. The five classifications are summarized below:

- □ **No Damage or Very Minor Damage**: Little or no visible damage from the outside. No broken windows or failed roof deck. Minimal loss of roof cover, with no or very limited water penetration.
- ☐ Minor Damage: Maximum of one broken window, door, or garage door. Moderate roof cover loss that can be covered to prevent additional water entering the building. Marks or dents on walls requiring painting or patching for repair.
- ☐ **Moderate Damage**: Major roof cover damage, moderate window breakage. Minor roof sheathing failure. Some resulting damage to interior of building from water.
- □ **Severe Damage**: Major window damage or roof sheathing loss. Major roof cover loss. Extensive damage to interior from water. Limited, local joist failures. Failure of one wall.
- □ **Destruction:** Essentially complete roof failure and/or more than 25% of roof sheathing. Significant amount of the wall envelope opened through window failure and/or failure of more than one wall. Extensive damage to interior.

Table 4-3 presents the peak wind speeds during each wind event simulated by HAZUS for North Canaan. The number of expected residential buildings to experience various classifications of damage is presented in Table 4-3, and the total number of buildings expected to experience various classifications of damage is presented in Table 4-4. Minimal damage is expected to buildings for wind speeds less than 65 mph, with overall damages increasing with increasing wind speed.

Table 4-3
HAZUS Hurricane Scenarios – Number of Residential Buildings Damaged

Return Period or Storm	Peak Wind Gust (mph)	Minor Damage	Moderate Damage	Severe Damage	Total Destruction	Total
10-Years	35	None	None	None	None	None
20-Years	49	None	None	None	None	None
Gloria (1985)	54	1	None	None	None	1
50-Years	65	1	None	None	None	1
100-Years	76	11	1	None	None	12
200-Years	86	51	4	None	None	55
Unnamed (1938)	95	139	15	None	None	154
500-Years	98	179	23	1	1	204
1000-Years	106	316	64	3	3	386

Table 4-4
HAZUS Hurricane Scenarios – Total Number of Buildings Damaged

Return Period or Storm	Minor Damage	Moderate Damage	Severe Damage	Total Destruction	Total
10-Years	None	None	None	None	None
20-Years	None	None	None	None	None
Gloria (1985)	1	None	None	None	1
50-Years	2	None	None	None	2
100-Years	13	1	None	None	14
200-Years	56	4	None	None	60
Unnamed (1938)	152	17	1	None	170
500-Years	196	27	1	1	225
1000-Years	349	75	6	3	433

The HAZUS simulations consider a subset of critical facilities termed "essential facilities" which are important during emergency situations. Note that the essential facilities in HAZUS-MH may not necessarily be the same today as they were in 2000. Nevertheless, the information is useful from a planning standpoint. As shown in Table 4-5, minimal damage to essential facilities is expected for wind speeds less than 98 mph. Minor damage to schools occurs at wind speeds of approximately 106 mph and greater with loss of use to all schools.

Table 4-5
HAZUS-MH Hurricane Scenarios – Essential Facility Damage

Return Period or Storm	Fire Stations (1)	Schools (1)
10-Years	None or Minor	None or Minor
20-Years	None or Minor	None or Minor
Gloria (1985)	None or Minor	None or Minor
50-Years	None or Minor	None or Minor
100-Years	None or Minor	None or Minor
200-Years	None or Minor	None or Minor
Unnamed (1938)	None or Minor	None or Minor
500-Years	None or Minor	None or Minor
1000-Years	None or Minor	Minor damage with loss of use to all schools

Table 4-6 presents the estimated tonnage of debris that would be generated by wind damage during each HAZUS storm scenario. The model breaks the debris into four general categories based on the different types of material handling equipment necessary for cleanup. Minimal debris is expected for storms less than the 20-year event, and reinforced concrete and steel buildings are not expected to generate debris. Much of the debris is structure-related.

Table 4-6
HAZUS-MH Hurricane Scenarios – Debris Generation (Tons)

Return Period or Storm	Brick / Wood	Reinforced Concrete / Steel	Eligible Tree Debris	Other Tree Debris	Total
10-Years	None	None	None	None	None
20-Years	None	None	None	None	None
Gloria (1985)	None	None	21	207	228
50-Years	None	None	50	508	558
100-Years	34	None	149	1,508	1,691
200-Years	131	None	631	6,383	7,145
Unnamed (1938)	330	None	951	9,619	10,900
500-Years	438	None	1,075	10,872	12,385
1000-Years	956	None	1,656	16,740	19,352

There are no predicted sheltering requirements for <u>wind damage</u>. However, it is likely that hurricanes will produce heavy rain and flooding that may require sheltering need in North Canaan.

Table 4-7 presents the predicted economic losses due to the various simulated wind events. Property damage loss estimates include the subcategories of building, contents, and inventory damages. The direct property damage losses are the estimated costs to repair or replace the damage caused to the building or its contents. Business interruption loss estimates include the subcategories of lost income, relocation expenses, and lost wages. The business interruption losses are associated with the inability to operate a business due to the damage sustained during a hurricane, and also include temporary living expenses for those people displaced from their home because of the storm.

Table 4-7
HAZUS Hurricane Scenarios – Economic Losses

Return Period or Storm	Residential Property Damage Losses	Total Property Damage Losses	Business Interruption (Income) Losses	Total Losses
10-Years	None	None	None	None
20-Years	None	None	None	None
Gloria (1985)	\$20,160	\$20,160	\$20	\$20,180
50-Years	\$155,300	\$165,790	\$50	\$165,840
100-Years	\$610,710	\$623,690	\$3,700	\$627,390
200-Years	\$1,455,060	\$1,526,420	\$49,500	\$1,575,920
Unnamed (1938)	\$2,892,180	\$3,165,110	\$162,680	\$3,327,790
500-Years	\$3,599,000	\$4,030,080	\$331,830	\$4,361,920
1000-Years	\$7,271,470	\$8,627,620	\$950,640	\$9,578,260

Losses are minimal for storms with return periods of less than 20-years (49 mph) but increase rapidly as larger storms are considered. For example, a reenactment of the 1938 hurricane would cause approximately \$3.3 million in wind damages to North Canaan. As these damage values are based on 2006 dollars, it is likely that these estimated damages will be higher today due to inflation.

In summary, hurricanes are a very real and potentially costly hazard to North Canaan. Based on the historic record and HAZUS-MH simulations of various wind events, the entire community is vulnerable to wind damage from hurricanes. These damages can include direct structural damages, interruptions to business and commerce, emotional impacts, and injury and possibly death.

#### 4.6 Potential Mitigation Strategies and Actions

Many potential mitigation measures for hurricanes include those appropriate for flooding. These were presented in Section 3.6. However, hurricane mitigation measures must also address the effects of heavy winds that are inherently caused by hurricanes. Mitigation for wind damage is therefore emphasized in the subsections below.

#### 4.6.1 Prevention

Although hurricanes and tropical storms cannot be prevented, a number of methods are available to continue preventing damage from the storms and perhaps to mitigate damage. The following actions have been identified as potential preventive measures:

Perform periodic tree limb inspection and maintenance programs to ensure that the potential
for downed power lines is diminished.
Continue requiring the location of utilities underground in new developments or during
redevelopment whenever possible.
Continue to review and update the currently enacted Emergency Operations Plan, evacuation
plans, supply distribution plans, and other emergency planning documents for the town as
appropriate.
Develop a phased approach to replacing aboveground utility lines with underground utility
lines, taking advantage of opportunities such as streetscaping projects.

#### 4.6.2 Property Protection

Most people perform basic property protection measures in advance of hurricanes, including cutting dangerous tree limbs, boarding windows, and moving small items inside that could be carried away by heavy winds. Property protection measures for hurricanes include those described for flooding in Section 3.6.2 due to the potential for heavy rainfall to accompany the storm. In terms of new construction and retrofits, various structural projects for wind damage mitigation on buildings are described in Section 4.6.5.

The local tree warden should attempt education and outreach regarding dangerous trees on private property, particularly for trees near homes with dead branches overhanging the structure or nearby power lines. These limbs are the most likely to fall during a storm.

#### 4.6.3 Emergency Services

The EOP of the Town includes guidelines and specifications for communication of hurricane warnings and watches as well as for a call for evacuation. The public needs to be made aware of evacuation routes and the locations of public shelters in advance of a hurricane event, which can be accomplished (1) by placing this information on the Town website, (2) by creating informational displays in local municipal buildings and high traffic businesses such as supermarkets, and (3) through press releases to local radio and television stations and local newspapers. North Canaan should identify and prepare additional facilities for evacuation and sheltering needs. The Town should also continue to review its mutual aid agreements and update as necessary to ensure that help is available as needed and that the town is not hindered responding to its own emergencies as it assists with regional emergencies.

#### 4.6.4 Public Education and Awareness

Tracking of hurricanes has advanced to the point where areas often have one week of warning time or more prior to a hurricane strike. The public should be made aware of available shelters prior to a hurricane event, as well as potential measures to mitigate personal property damage. This was discussed in Section 4.6.3 above. A number of specific proposals for improved public education are recommended to prevent damage and loss of life during hurricanes. These are common to all hazards in this Plan and are listed in Section 10.1.

# 4.6.5 <u>Structural Projects</u>

While structural projects to completely eliminate wind damage are not possible, potential structural mitigation measures for buildings include designs for hazard-resistant construction and retrofitting techniques. These generally take the form of increased wind and flood resistance as well as the use of storm shutters over exposed glass and the inclusion of hurricane straps to hold roofs to buildings. The four categories of structural projects for wind damage mitigation in private homes and critical facilities include the installation of shutters, load path projects, roof projects, and code plus projects and are defined below.

- ☐ Shutter mitigation projects protect all windows and doors of a structure with shutters, lamentations, or other systems that meet debris impact and wind pressure design requirements. All openings of a building are to be protected, including garage doors on residential buildings, large overhead doors on commercial buildings, and apparatus bay doors at fire stations.
- □ <u>Load path</u> projects improve and upgrade the structural system of a building to transfer loads from the roof to the foundation. This retrofit provides positive connection from the roof framing to the walls, better connections within the wall framing, and connections from the wall framing to the foundation system.
- ☐ Roof projects involve retrofitting a building's roof by improving and upgrading the roof deck and roof coverings to secure the building envelope and integrity during a wind or seismic event.
- ☐ Code plus projects are those designed to exceed the local building codes and standards to achieve a greater level of protection.

Given the relative infrequency of hurricane wind damage in the town of North Canaan, it is unlikely that any structural project for mitigating wind damage would be cost effective unless it

was for a critical facility. The Town should encourage the above measures in new construction and require it for new critical facilities. Continued compliance with the amended Connecticut Building Code for wind speeds is necessary. Literature should be made available by the Building Department to developers during the permitting process regarding these design standards.

## 4.7 Summary of Specific Strategies and Actions

While many potential mitigation activities were addressed in Section 4.6, the recommended mitigation strategies for mitigating hurricane and tropical storm winds in the town of North Canaan are listed below.

Develop a town wide tree limb inspection and maintenance programs to ensure that the
potential for downed power lines is diminished.
Consider updating the Town regulations or Ordinances to require the location of utilities
underground in new developments or during redevelopment whenever possible.
The Building Department should provide literature regarding appropriate design standards for
wind.
Encourage the use of structural techniques related to mitigation of wind damage in new
residential and commercial structures to protect new buildings to a standard greater than the
minimum building code requirements. Require such improvements for new municipal
critical facilities.

In addition, important recommendations that apply to all hazards are listed in Section 10.1.

#### 5.0 SUMMER STORMS AND TORNADOES

## 5.1 Setting

Like hurricanes and winter storms, summer storms and tornadoes have the potential to affect any area within the town of North Canaan. Furthermore, because these types of storms and the hazards that result (flash flooding, wind, hail, and lightning) might have limited geographic extent, it is possible for a summer storm to harm one area within the town without harming another. The entire town of North Canaan is therefore susceptible to summer storms (including heavy rain, flash flooding, wind, hail, and lightning) and tornadoes.

Based on the historic record, it is considered highly likely that a summer storm that includes lightning will impact the town of North Canaan each year although lightning strikes have a limited effect. Strong winds and hail are considered likely to occur during such storms but also generally have limited effects. A tornado is considered a possible event in Litchfield County each year and could cause significant damage to a small area.

In July 10, 1989 at least three tornadoes moved through Litchfield and New Haven Counties, causing more than \$100 million in damage.

#### 5.2 Hazard Assessment

Heavy wind (including tornadoes and downbursts), lightning, heavy rain, hail, and flash floods are the primary hazards associated with summer storms. Flooding caused by heavy rainfall was covered in Section 3.0 of this Plan and will not be discussed in detail herein.

#### **Tornadoes**

NOAA defines a tornado as "a violently rotating column of air extending from a thunderstorm to the ground." The two types of tornadoes include those that develop from supercell thunderstorms and those that do not. While the physics of tornado development are fairly well understood, there are many unknowns still being studied regarding the exact conditions in a storm event required to trigger a tornado, the factors affecting the dissipation of a tornado, and the effect of cloud seeding on tornado development.

Supercell thunderstorms are long lived (greater than one hour) and highly organized storms feeding off an updraft that is tilted and rotating. This rotation is referred to as a "mesocyclone" when detected by Doppler radar. The figure below is a diagram of the anatomy of a supercell that has spawned a supercell tornado. Tornadoes that form from a supercell thunderstorm are a very small extension of the larger rotation; they are the most common and the most dangerous type of tornado as most large and violent tornadoes are spawned from supercells.

Nonsupercell tornadoes are defined by NOAA as circulations that form without a rotating updraft. Damage from these types of tornadoes tends to be F2 or less (see Fujita Scale, below). The two types of nonsupercell tornadoes are gustnadoes and landspouts.

A gustnado is a whirl of dust or debris at or near the ground with no condensation tunnel that forms along the gust front of a storm.

☐ A landspout is a narrow, ropelike condensation funnel that forms when the thunderstorm cloud is still growing and there is no rotating updraft. Thus, the spinning motion originates near the ground. Waterspouts are similar to landspouts but occur over water.


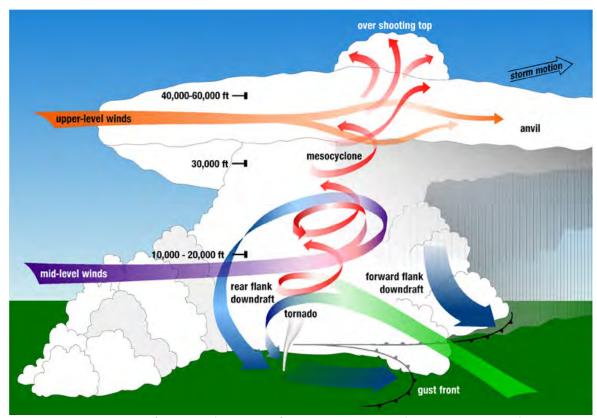


Figure 5-1: Anatomy of a Tornado. Image from NOAA National Severe Storms Laboratory.

The Fujita Scale was accepted as the official classification system for tornado damage for many years following its publication in 1971. The Fujita Scale rated the intensity of a tornado by examining the damage caused by the tornado after it has passed over a man-made structure. The scale ranked tornadoes using the now-familiar notation of F0

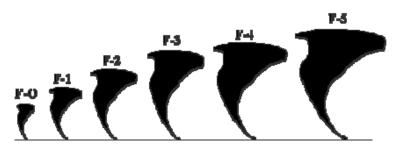

Fujita Tornado Scale. Image courtesy of FEMA.

through F5, increasing with wind speed and intensity. A description of the scale follows in Table 5-1.

Table 5-1 Fujita Scale

F-Scale Number	Intensity	Wind Speed	Type of Damage Done
F0	Gale tornado	40-72 mph	Some damage to chimneys; branches broken off trees; shallow-rooted trees knocked over; damage to sign boards.
F1	Moderate tornado	73-112 mph	Peels surface off roofs; mobile homes pushed off foundations or overturned; moving autos pushed off the roads; attached garages may be destroyed.
F2	Significant tornado	113-157 mph	Considerable damage. Roofs torn off frame houses; mobile homes demolished; boxcars pushed over; large trees snapped or uprooted; light object missiles generated.
F3	Severe tornado	158-206 mph	Roof and some walls torn off well-constructed houses; trains overturned; most trees in forest uprooted.
F4	Devastating tornado	207-260 mph	Well-constructed houses leveled; structures with weak foundations blown off for some distance; cars thrown and large missiles generated.
F5	Incredible tornado	261-318 mph	Strong frame houses lifted off foundations and carried considerable distances to disintegrate; automobile-sized missiles fly through the air in excess of 100 meters; trees de-barked; steel-reinforced concrete structures badly damaged.

According to NOAA, weak tornadoes (F0 and F1) account for approximately 69% of all tornadoes. These tornadoes last an average of five to 10 minutes and account for approximately 3% of tornado-related deaths. Strong tornadoes (F2 and F3) account for approximately 29% of all tornadoes and approximately 27% of all tornado deaths. These storms may last for 20 minutes or more. Violent supercell tornadoes (F4 and above) are extremely destructive but rare and account for only 2% of all tornadoes. These storms sometimes last over an hour and result in approximately 70% of all tornado-related deaths.

The Enhanced Fujita Scale was released by NOAA for implementation on February 1, 2007. According to the NOAA website, the Enhanced Fujita Scale was developed in response to a number of weaknesses to the Fujita Scale that were apparent over the years, including the subjectivity of the original scale based on damage, the use of the worst damage to classify the tornado, the fact that structures have different construction depending on location within the United States, and an overestimation of wind speeds for F3 and greater.

Similar to the Fujita Scale, the Enhanced Fujita Scale is also a set of wind estimates based on damage. It uses three-second gusts estimated at the point of damage based on a judgment of eight levels of damage to 28 specific indicators. Table 5-2 relates the Fujita and Enhanced Fujita Scales.

Table 5-2 Enhanced Fujita (EF) Scale

Fujita Scale			Derived EF S	Scale	Operational l	EF Scale
F Number	Fastest 1/4-	3-Second	EF Number	3-Second	EF Number	3-Second
1 1100000	mile (mph)	Gust (mph)	$h$ ) $\prod_{i=1}^{n} f(i)$	Gust (mph)	LI Ivanioei	Gust (mph)
0	40-72	45-78	0	65-85	0	65-85
1	73-112	79-117	1	86-109	1	86-110
2	113-157	118-161	2	110-137	2	111-135
3	158-207	162-209	3	138-167	3	136-165
4	208-260	210-261	4	168-199	4	166-200
5	261-318	262-317	5	200-234	5	Over 200

Official records of tornado activity date back to 1950. According to NOAA, an average of 1,000 tornadoes is reported each year in the United States. The historic record of tornadoes near North Canaan is discussed in Section 5.3. Tornadoes are most likely to occur in Connecticut in June, July, and August of each year.

#### Lightning

Lightning is a discharge of electricity that occurs between the positive and negative charges within the atmosphere or between the atmosphere and the ground. According to NOAA, the creation of lightning during a storm is a complicated process that is not fully understood. In the initial stages of development, air acts as an insulator between the positive and negative charges. However, when the potential between the positive and negative charges becomes too great, a discharge of electricity (lightning) occurs.

In-cloud lightning occurs between the positive charges near the top of the cloud and the negative charges near the bottom. Cloud-to-cloud lightning occurs between the positive charges near the top of the cloud and the negative charges near the bottom of a second cloud. Cloud-to-ground lightning is the



Image courtesy of NOAA.

most dangerous. In summertime, most cloud-to-ground lightning occurs between the negative charges near the bottom of the cloud and positive charges on the ground.

According to NOAA's National Weather Service, there is an average of 100,000 thunderstorms per year in the United States. An average of 41 people per year died, and an average of 262 people were injured from lightning strikes in the United States from 2000 to 2009. Most lightning deaths and injuries occur outdoors, with 45% of lightning casualties occurring in open fields and ballparks, 23% under trees, and 14% involving water activities.

The historic record of lightning strikes both in Connecticut and near North Canaan is presented in Section 5.3.

#### Downbursts

A downburst is a severe localized wind blasting down from a thunderstorm. They are more common than tornadoes in Connecticut. Depending on the size and location of downburst events, the destruction to property may be significant.

Downburst activity is, on occasion, mistaken for tornado activity. Both storms have very damaging winds (downburst wind speeds can exceed 165 miles per hour) and are very loud. These "straight line" winds are distinguishable from tornadic activity by the pattern of destruction and debris such that the

#### Downbursts fall into two categories:

- ☐ *Microbursts* affect an area less than 2.5 miles in diameter, last five to 15 minutes, and can cause damaging winds up to 168 mph.
- ☐ *Macrobursts* affect an area at least 2.5 miles in diameter, last five to 30 minutes, and can cause damaging winds up to 134 mph.

best way to determine the damage source is to fly over the area.

It is difficult to find statistical data regarding frequency of downburst activity. NOAA reports that there are 10 downburst reports for every tornado report in the United States. This implies that there are approximately 10,000 downbursts reported in the United States each year and further implies that downbursts occur in approximately 10% of all thunderstorms in the United States annually. This value suggests that downbursts are a relatively uncommon yet persistent hazard.

#### Hail

Hailstones are chunks of ice that grow as updrafts in thunderstorms keep them in the atmosphere. Most hailstones are smaller in diameter than a dime, but stones weighing more than 1.5 pounds have been recorded. NOAA has estimates of the velocity of falling hail ranging from nine meters per second (m/s) (20 mph) for a one centimeter (cm) diameter hailstone, to 48 m/s (107 mph) for an eight cm, 0.7 kilogram stone. While crops are the major victims of hail, larger hail is also a hazard to people, vehicles, and property.

According to NOAA's National Weather Service, hail caused four deaths and an average of 47 injuries per year in the United States from 2000 to 2009. Hailstorms typically occur in at least one part of Connecticut each year during a severe thunderstorm.

# 5.3 <u>Historic Record</u>

According to NOAA, the highest number of occurrences of tornadoes in Connecticut is in Litchfield (22 events between 1950 and 2009) and Hartford counties, followed by New Haven and Fairfield counties, and then Tolland, Middlesex, Windham, and finally New London County.

An extensively researched list of tornado activity in Connecticut is available on Wikipedia. This list extends back to 1648 although it is noted that the historical data prior to 1950 is incomplete due to lack of official records and gaps in populated areas. Based on available information through July 2013, Litchfield County has experienced a total of 17 tornado events with reported damages totaling tens of millions of dollars. Table 5-3 summarizes the tornado events near North Canaan through July 2013 based on the Wikipedia list.

Table 5-3 Tornado Events Near North Canaan From 1648 to July 2012

Date	Location	Fujita Tornado Scale	Property Damage	Injuries / Deaths
June 3, 1836	Dutchess County NY to Salisbury CT	-	NR	NR
August 11, 1966	Northern Litchfield County	F2	NR	NR
August 20, 1968	Northern Litchfield County	F1	NR	NR
August 7, 1972	Northern Litchfield County	F1	NR	NR
June 29, 1973	Northwest Litchfield County	F1	NR	NR
June 30, 1976	Northern Litchfield County	F1	NR	NR
June 6, 2002	Salisbury, CT (west of North Canaan)	F2	Destroyed 2 acres of healthy mature forest	NR

NR = None Reported

Thunderstorms occur on 18 to 35 days each year in Connecticut. The NOAA Technical Memorandum NWS SR-193 documents lightning fatalities, injuries, and damage reports in the United States from 1959 through 1994. This memorandum notes that there were 13 fatalities, 75 injuries, and 269 damage reports due to lightning between 1959 and 1994. According to the National Lightning Safety Institute, only two lightning-related fatalities occurred in Connecticut between 1990 and 2003. The National Weather Service publication *Storm Data* recorded one death in Connecticut from lightning strikes between 1998 and 2008 (on June 8, 2008, lightning struck a pavilion at Hammonasset Beach in Madison, Connecticut, injuring four and killing one).

Hail is often a part of such thunderstorms as seen in the historic record for North Canaan (below). A limited selection of summer storm damage in and around North Canaan, taken from the NCDC Storm Events database, is listed below:

June 19, 2006- Thunderstorms formed over southwestern New England with one
thunderstorm producing golf ball size hail in neighboring Canaan.
May 24, 2009- Scattered thunderstorms were responsible for nickel sized hail that was
reported near Cornwall during one event.
July 16, 2009- Severe thunderstorms moved across Litchfield County with reports of hail
across the region. Quarter sized hail was reported in Falls Village, nickel to ping pong sized
hail was reported in New Preston and New Milford, and quarter sized hail reported in
Woodbury.
July 26, 2009- Thunderstorms occurred across Litchfield County with some storms becoming
severe.
June 8, 2011- Severe thunderstorms were triggered across Litchfield County with golf ball
sized hail reported in Canaan, quarter sized hail reported in Falls Village and North Kent, and

nickel sized hail approximately 5 miles northwest of Litchfield.

☐ June 2, 2013 – Thunderstorms were aided by very strong winds and a few storms became severe across northwestern Connecticut, producing large hail. Quarter sized hail was reported during a thunderstorm in Falls Village.

#### 5.4 Existing Capabilities

Warning is the primary method of existing mitigation for tornadoes and thunderstorm-related hazards. The NOAA National Weather Service issues watches and warnings when severe weather is likely to develop or has developed, respectively. Tables 5-4 and 5-5 list the NOAA Watches and Warnings, respectively, as pertaining to actions to be taken by emergency management personnel in connection with summer storms and tornadoes.

Table 5-4 NOAA Weather Watches

<b>Weather Condition</b>	Meaning	Actions
Severe Thunderstorm	Severe thunderstorms are possible in	Notify personnel and watch for
Severe Thunderstorm	your area.	severe weather.
Tornado	Tornadoes are possible in your area.	Notify personnel and be prepared to
Tornado	Tornadoes are possible in your area.	move quickly if a warning is issued.
Flash Flood	It is possible that rains will cause	Notify personnel to watch for street
Flash Flood	flash flooding in your area.	or river flooding.

Table 5-5 NOAA Weather Warnings

Weather Condition	Meaning	Actions
Severe Thunderstorm	Severe thunderstorms are occurring or are imminent in your area.	Notify personnel and watch for severe conditions or damage (i.e., downed power lines and trees).  Take appropriate actions listed in
Tornado	Tornadoes are occurring or are imminent in your area.	municipal emergency plans.  Notify personnel, watch for severe weather, and ensure personnel are protected. Take appropriate actions listed in emergency plans.
Flash Flood	Flash flooding is occurring or imminent in your area.	Watch local rivers and streams. Be prepared to evacuate low-lying areas. Take appropriate actions listed in emergency plans.

Aside from warnings, several other methods of mitigation for wind damage are employed in North Canaan as explained in Section 4.0. In addition, the Connecticut State Building Code includes guidelines for the proper grounding of buildings and electrical boxes.

A <u>severe thunderstorm watch</u> is issued by the National Weather Service when the weather conditions are such that a severe thunderstorm (winds greater than 58 miles per hour, or hail three-fourths of an inch or greater, or can produce a tornado) is likely to develop.

A <u>severe thunderstorm warning</u> is issued when a severe thunderstorm has been sighted or indicated by weather radar.

Developing and disseminating emergency public information and instructions concerning tornado, thunderstorm wind, lightning, and hail safety, especially guidance regarding in-home protection and evacuation procedures and locations of public shelters
 Designating appropriate shelter space in the community that could potentially withstand lightning and tornado impact
 Periodically testing and exercising tornado response plans
 Putting emergency personnel on standby at tornado "watch" stage
 Utilizing the Alert Now/Blackboard Connect emergency notification system to send warnings into potentially affected areas.

Municipal responsibilities relative to summer storm and tornado mitigation and preparedness

## 5.5 Vulnerabilities and Risk Assessment

include:

<u>Description</u> – According to the 2014 *Natural Hazard Mitigation Plan Update*, Litchfield County has a high risk of tornado activity based on historical occurrences. Therefore, by virtue of its location in Litchfield County, the Town of North Canaan has a high potential to experience tornado damage. In addition, NOAA states that climate change has the potential to increase the frequency and intensity of tornadoes, so it is possible that the pattern of occurrence in Connecticut could change in the future.

Although tornadoes pose a threat to all areas of the state, their occurrence is not considered frequent enough to justify the construction of tornado shelters. Instead, the state has provided NOAA weather radios to all public schools as well as many local governments for use in public buildings. The general public continues to rely on mass media for knowledge of weather warnings. Warning time for tornadoes is very short due to the nature of these types of events, so predisaster response time can be limited. However, the NOAA weather radios provide immediate notification of all types of weather warnings in addition to tornadoes, making them very popular with communities.

The central and southern portions of the United States are at higher risk for lightning and thunderstorms than is the northeast. However, FEMA reports that more deaths from lightning occur on the East Coast than elsewhere. Lightning-related fatalities have declined in recent years due to increased education and awareness.

In general, thunderstorms and hailstorms in Connecticut are more frequent in the western and northern parts of the state and less frequent in the southern and eastern parts. Thunderstorms are expected to impact North Canaan 20 to 30 days each year. The majority of these events do not cause any measurable damage. Although lightning is usually associated with thunderstorms, it can occur on almost any day. The likelihood of lightning strikes in the North Canaan area is very high during any given thunderstorm although no one area of the town is at higher risk of lightning strikes. The risk of at least one hailstorm occurring in North Canaan is considered moderate in any given year.

Most thunderstorm damage is caused by straight-line winds exceeding 100 mph. Straight-line winds occur as the first gust of a thunderstorm or from a downburst from a thunderstorm and have no associated rotation. The risk of downbursts occurring during such storms and damaging the town of North Canaan is believed to be low for any given year. All areas of the town are

susceptible to damage from high winds although more building damage is expected in the town center while more tree damage is expected in the less densely populated areas.

Secondary damage from falling branches and trees is more common than direct wind damage to structures. Heavy winds can take down trees near power lines, leading to the start and spread of fires. CL&P trims trees along powers lines. The town tree warden can remove dead and diseased trees in rights-of-way or Town land. Town-owned equipment is used except for complex situations, which would call for the use of a contractor.

Town personnel note that strong thunderstorms will cause power lines to fall all over the town. Most downed power lines in North Canaan are detected quickly, and any associated fires are quickly extinguished. Such fires can be extremely dangerous during the summer months during dry and drought conditions. It is important to have adequate water supply for fire protection to ensure the necessary level of safety is maintained.

Similar to the discussion for hurricanes in Section 4.5, no critical facility is believed to be more susceptible to summer storm damage than any other. Some critical facilities are more susceptible than others to flooding damage due to summer storms. Such facilities susceptible to flooding damage were discussed in Section 3.5.

<u>Loss Estimates</u> – The 2014 Connecticut Natural Hazard Mitigation Plan provides annual estimated losses on a countywide basis for several hazards. Based on the population of North Canaan relative to Litchfield County, the annual estimated loss is \$1,015 for thunderstorms and \$27,024 for tornadoes. The figure for tornadoes is influenced by their infrequent occurrence.

<u>Summary</u> – The entire town of North Canaan is at relatively equal risk for experiencing damage from summer storms and tornadoes. Based on the historic record, at least one tornado has resulted in costly damage to the town. However, more frequent storm damages are relatively site specific and occur to private property (and therefore are paid for by private insurance). For municipal property, the Town budget for tree removal and minor repairs is generally adequate to handle summer storm damage.

#### **5.6** Potential Mitigation Strategies and Actions

Most of the mitigation activities for summer storm and tornado wind damage are similar to those discussed in Section 4.6 and are not reprinted here. Public education is the best way to mitigate damage from hail, lightning, and tornadoes. In addition to other

## More information is available at:

FEMA – http://www.fema.gov/library/ NOAA – http://www.nssl.noaa.gov/NWSTornado/

educational documents, the Building Official should make literature available regarding appropriate design standards for grounding of structures.

Both the FEMA and the NOAA websites contain valuable information regarding preparing for and protecting oneself during a tornado as well as information on a number of other natural hazards. Available information from FEMA includes:

☐ Design and construction guidance for creating and identifying community shelters

	Recommendations to better protect your business, community, and home from tornado damage, including construction and design guidelines for structures  Ways to better protect property from wind damage  Ways to protect property from flooding damage  Construction of safe rooms within homes				
loc sta cor	DAA information includes a discussion of family preparedness procedures and the best physical rations during a storm event. Although tornadoes pose a legitimate threat to public safety, as ted in Section 3.5 their occurrence is considered too infrequent in Connecticut to justify the astruction of tornado shelters and safe rooms. Residents should instead be encouraged to rehase a NOAA weather radio containing an alarm feature.				
sen ext tele cor Co stu dif	The Town utilizes an emergency notification system known as Alert Now/Blackboard Connect to send geographically specific telephone warnings into areas at risk for hazard damage. This is extremely useful for hazard mitigation as a community warning system that relies on radios and elevision is less effective at warning residents during the night when the majority of the community is asleep. This fact was evidenced recently by a severe storm that struck Lake County, Florida on February 2, 2007. This powerful storm, which included several tornadoes, stuck at about 3:15 a.m. According to National Public Radio, local broadcast stations had difficulty warning residents due to the lack of listeners and viewers and encouraged those awake to telephone warnings into the affected area.				
Su	mmary of Specific Strategies and Actions				
	nile many potential mitigation activities for addressing wind risks were addressed in Section , they also apply to thunderstorm winds, tornadoes, hail, and lightning and are listed below:				
4.7					
4.7 <b>-</b>	Develop a town wide tree limb inspection and maintenance programs to ensure that the potential for downed power lines is diminished.  Consider updating the Town regulations or Ordinances to require the location of utilities				
4.7	Develop a town wide tree limb inspection and maintenance programs to ensure that the potential for downed power lines is diminished.  Consider updating the Town regulations or Ordinances to require the location of utilities underground in new developments or during redevelopment whenever possible.  Ensure that the town maximizes its use of the Alert Now/Blackboard Connect emergency				
4.7	Develop a town wide tree limb inspection and maintenance programs to ensure that the potential for downed power lines is diminished.  Consider updating the Town regulations or Ordinances to require the location of utilities underground in new developments or during redevelopment whenever possible.  Ensure that the town maximizes its use of the Alert Now/Blackboard Connect emergency notification system by subscribing to as many residents as possible.				
	Develop a town wide tree limb inspection and maintenance programs to ensure that the potential for downed power lines is diminished.  Consider updating the Town regulations or Ordinances to require the location of utilities underground in new developments or during redevelopment whenever possible.  Ensure that the town maximizes its use of the Alert Now/Blackboard Connect emergency				

In addition, important recommendations that apply to all hazards are listed in Section 10.1.

minimum building code requirements. Require such improvements for new municipal

critical facilities.

5.7

#### 6.0 WINTER STORMS

# 6.1 Setting

Similar to summer storms and tornadoes, winter storms have the potential to affect any area of the town of North Canaan. However, unlike summer storms, winter events and the hazards that result (wind, snow, and ice) have more widespread geographic extent. The entire town of North Canaan is susceptible to winter storms and, due to its variable elevation, can have higher amounts of snow in the outskirts of the town than in the town center. In general, winter storms are considered highly likely to occur each year (although major storms are less frequent), and the hazards that result (nor'easter winds, snow, and blizzard conditions) can potentially have a significant effect over a large area of the town.

# 6.2 Hazard Assessment

This section focuses on those effects commonly associated with winter weather, including blizzards, freezing rain, ice storms, nor'easters, sleet, snow, winter storms and, to a secondary extent, extreme cold.

<b>Blizzards</b> include winter storm conditions of sustained winds or frequent gusts of 35 mph or greater that cause major blowing and drifting of snow, reducing visibility to less than one-quarter mile for three or more hours. Extremely cold temperatures and/or wind chills are often associated with dangerous blizzard conditions.
<b>Freezing Rain</b> consists of rain that freezes on objects, such as trees, cars, or roads and forms a coating or glaze of ice. Temperatures in the mid to upper atmosphere are warm enough for rain to form, but surface temperatures are below the freezing point, causing the rain to freeze on impact.
<b>Ice Storms</b> are forecasted when freezing rain is expected to create ice build-ups of one-quarter inch or more that can cause severe damage.
<b>Nor'easters</b> are the classic winter storm in New England, caused by a warm, moist, low pressure system moving up from the south colliding with a cold, dry high pressure system moving down from the north. The nor'easter derives its name from the northeast winds typically accompanying such storms, and such storms tend to produce a large amount of rain or snow. They usually occur between November 1 and April 1 of any given year, with such storms occurring outside of this period typically bringing rain instead of snow.
<b>Sleet</b> occurs when rain drops freeze into ice pellets before reaching the ground. Sleet usually bounces when hitting a surface and does not stick to objects. It can accumulate like snow and cause a hazard to motorists.
<b>Snow</b> is frozen precipitation composed of ice particles that forms in cold clouds by the direct transfer of water vapor to ice.
<b>Winter Storms</b> are defined as heavy snow events that have a snow accumulation of more than six inches in 12 hours or more than 12 inches in a 24-hour period.

Impacts from severe winter weather can become dangerous and a threat to people and property. Most winter weather events occur between December and March although in 2011 Connecticut experienced a significant October snowstorm that left much of the state without power for a week. Winter weather may include snow, sleet, freezing rain, and cold temperatures. According to

According to the National Weather Service, approximately 70% of winter deaths related to snow and ice occur in automobiles, and approximately 25% of deaths occur from people being caught in the cold. In relation to deaths from exposure to cold, 50% are people over 60 years old, 75% are male, and 20% occur in the home.

NOAA, winter storms were responsible for the death of 33 people per year from 2000 to 2009. Most deaths from winter storms are indirectly related to the storm, such as from traffic accidents on icy roads and hypothermia from prolonged exposure to cold. Damage to trees and tree limbs and the resultant downing of utility cables are a common effect of these types of events. Secondary effects include loss of power and heat, and flooding as a result of snowmelt.

Until recently, the Northeast Snowfall Impact Scale (NESIS) was used by NOAA to characterize and rank high-impact northeast snowstorms. This ranking system has evolved into the currently used Regional Snowfall Index (RSI). The RSI ranks snowstorms that impact the eastern two thirds of the United States, placing them in one of five categories: Extreme, Crippling, Major, Significant, and Notable. The RSI is based on the spatial extent of the storm, the amount of snowfall, and the juxtaposition of these elements with population. RSI differs from NESIS in that it uses a more refined geographic area to define the population impact. NESIS had used the population of the entire two-thirds of the United States in evaluating impacts for all storms whereas RSI has refined population data into six regions. The result is a more region-specific analysis of a storm's impact. The use of population in evaluating impacts provides a measure of societal impact from the event. Table 6-1 presents the RSI categories, their corresponding RSI values, and a descriptive adjective.

Table 6-1 RSI Categories

Category	RSI Value	Description
1	1-3	Notable
2	3-6	Significant
3	6-10	Major
4	10-18	Crippling
5	18.0+	Extreme

RSI values are calculated within a GIS. The aerial distribution of snowfall and population information are combined in an equation that calculates the RSI score, which varies from around one for smaller storms to over 18 for extreme storms. The raw score is then converted into one of the five RSI categories. The largest RSI values result from storms producing heavy snowfall over large areas that include major metropolitan centers. Approximately 196 of the most notable historic winter storms to impact the Northeast have been analyzed and categorized by RSI through March 2013.

# 6.3 Historic Record

A total of 16 extreme, crippling, and major winter storms have occurred in Connecticut during the past 30 years. One is listed for each of the years 1983, 1987, 1993, 1994, 1996, 2003, 2005, 2006, and 2007. More alarmingly, four are listed in the calendar year 2010, two in 2011 and one in 2013.

Considering nor'easters only, 11 major winter nor'easters have occurred in Connecticut during the past 30 years (in 1983, 1988, 1992, 1996, 2003, 2006, 2009, 2010, two in 2011, and 2013).

According to the NCDC, there have been approximately 134 snow and ice events in the state of Connecticut between 1993 and April 2010, causing over \$18 million in damages. Notably, heavy snow in December 1996 caused \$6 million in property damage. Snow removal and power restoration for a winter storm event spanning March 31 and April 1, 1997 cost \$1 million. On March 5, 2001, heavy snow caused \$5 million in damages, followed by another heavy snow event four days later that caused an additional \$2 million in damages.

Catastrophic ice storms are less frequent in Connecticut than the rest of New England due to the close proximity of the warmer waters of the Atlantic Ocean and Long Island Sound. However, winter storm Alfred from October 29-30, 2011 had an ice precipitation component to it. Although wet snow was the major problem, ice mixed in along and just to the north of the shoreline which slickened roadways and led to additional weight build-up on trees and utility lines and other infrastructure.

The most severe ice storm in Connecticut on record was Ice Storm Felix on December 18, 1973. This storm resulted in two deaths and widespread power outages throughout the state. An ice storm in November 2002 that hit Litchfield and western Hartford Counties resulted in \$2.5 million in public sector damages.

However, the most damaging winter storms are not always nor easters. According to the NCDC, there have been 134 snow and ice events in the state of Connecticut between 1993 and April 2010, causing over \$18 million in damages. Additional examples of recent winter weather events to affect the North Canaan area, taken from the NCDC database, include:

- □ March 13-14, 1993 A massive, powerful storm dubbed the "Storm of the Century" caused "whiteout" blizzard conditions stretching from Jacksonville, Florida into eastern Canada and affected 26 states, producing 24 inches of snow in Hartford and up to 21 inches of snow in New Haven County. A total of 40,000 power outages and \$550,000 in property damage was reported throughout Connecticut, and the state received a federal emergency declaration. The storm had a RSI rating of "Category 5 –Extreme" and is the second highest ranking storm recorded by RSI.
- ☐ January 15-16, 1994 A Siberian air mass brought record to near-record low temperatures across Connecticut. Strong northwest winds accompanied the cold and drove wind chill values to 30 to 50 degrees below zero.
- □ December 23, 1994 An unusual snowless late December storm caused gale force winds across the state. The high winds caused widespread power outages affecting up to 130,000 customers statewide. Numerous trees and limbs were blown down, damaging property,

mph were reported.
January 7-8, 1996 – Winter Storm Ginger caused heavy snow and shut down the state of Connecticut for an entire day. The state received a federal major disaster declaration. The storm had a RSI rating of "Category 5 – Extreme" and is the third-highest ranked storm by RSI.
March $31$ – April 1, $1997$ – A late season storm produced rain and wet snow. This storm caused over one million dollars in property damage and cost an additional one million dollars for snow removal and power restoration. This storm is ranked $36^{th}$ on the RSI scale and is regarded as a "Category $2$ – Significant" storm by RSI.
November 13, 14, 1997 - A winter storm tracked from the southeast coast north to the coast of southern New England and then out to sea. In Litchfield county, heavy accumulations of sleet and freezing rain occurred after several inches of snow. The freezing rain produced scattered power outages and a brown out occurred in the New Preston area. Some specific snowfall totals included: 4 inches at Cornwall and 2 inches at New Preston.
January 21, 2001 - A wave of low pressure developed along a stationary frontal boundary, across interior North Carolina, on Saturday January 20. This storm then deepened as it tracked northeastward by early Sunday morning, reaching a point about 100 miles east of Cape Cod by Sunday morning. This storm brought a significant snowstorm to Litchfield county during the predawn hours on Sunday January 21. A general 7-inch swath of snowfall was reported throughout the county. There were no unusual problems reported to the National Weather Service with this storm.
February 17, $2003$ – A heavy snowstorm caused near blizzard conditions and produced 24 inches of snow in areas of the state. The storm had a RSI rating of "Category 4 – Crippling" and is the $6^{th}$ ranked winter storm by RSI. The State of Connecticut received a federal emergency declaration.
February 12-13, 2006 – This nor'easter is ranked 30 <sup>th</sup> overall and as a "Category 2 – Significant" storm on the RSI scale. The storm produced 18 to 24 inches of snow across Connecticut. Five Connecticut counties received a federal emergency declaration.
The winter storms of December 24-28, 2010 and January 9-13, 2011 were rated preliminarily as "Category 2 – Significant" storms on RSI. The successive winter storms in late January to early February 2011 reportedly caused 70 inches of snowfall and collapsed nearly 80 roofs throughout the state. Critical facilities experiencing roof collapses in Connecticut included the Barkhamsted Highway Department Salt Shed and the Public Works Garage in the Terryville section of Plymouth. The Nye Street Fire Station in Vernon was also closed due to concerns related to the possible collapse of the roof due to heavy snow. The January storm resulted in Presidential Snowfall Disaster Declaration FEMA-1958-DR being declared for the state.
January 18, 2011 – A winter storm brought two to three inches of snow and sleet across northern Connecticut with a quarter to one-half inch of ice accumulation on top of that.

vehicles, and power lines to a total of \$5 million in damages. Peak wind gusts of up to 64

- ☐ February 1, 2011 "The Groundhog Day Blizzard of 2011" An ice storm brought a mixture of snow, sleet, and freezing rain with a second heavier round of freezing rain and sleet. The later episode caused numerous road closures and roof collapses across Connecticut.
- ☐ February 7, 2011 Excessive weight from snow and ice caused numerous roof collapses across southern Connecticut during the second week in February.
- October 29, 2011 –Winter Storm Alfred (October 29-30, 2011) dumped up to 32" of snow and caused over 600,000 electrical customers in Connecticut to lose power for a significant amount of time. The entire state dealt with wet snow and ice and statewide power outages affecting Connecticut for a week or longer. The storm was unique in that much of the foliage had yet to fall from trees, which provided more surface area for snow to land and stick, therefore making the trees significantly heavier than if the storm was to occur when trees had lost their foliage. The storm resulted in the death of eight people in Connecticut, four from carbon monoxide poisoning. In all, approximately 90 shelters and 110 warming centers were opened state-wide. The overall storm impacts and damages resulted in another Presidential Disaster Declaration for Connecticut.
- A fierce nor'easter (dubbed "Nemo" by the Weather Channel) in February 2013 brought blizzard conditions to most of the Northeast, producing snowfall rates of five to six inches per hour in parts of Connecticut. Many areas of Connecticut experienced more than 40 inches of snowfall, and the storm caused more than 700,000 power outages. All roads in Connecticut were closed for two days. This storm was ranked as a "Major" storm by NESIS. The overall storm impacts and damages resulted in yet one more Presidential Disaster Declaration for Connecticut.

The winter storms of January and February 2011 are listed as the 18<sup>th</sup> and 19<sup>th</sup> storms in the NESIS ranking. These storms produced snow, sleet, freezing rain, strong gusty winds, severely low temperatures, and coastal flooding. Snowfall totals for winter 2010-2011 in Connecticut averaged around 70 inches.

The snowfall, sleet, freezing rain, and rain that affected Connecticut during the 2010-2011 winter season proved to be catastrophic for a number of buildings. With severely low temperatures coupled with the absence of the removal of snow and ice buildup from roofs of buildings in Connecticut, numerous roofs collapsed during the winter season.

Using media reports, a list of roof/building collapses and damage due to buildup of frozen precipitation was compiled. The list (Table 6-2) includes 76 locations that span over a month of time from January 12, 2011 to February 17, 2011. No properties are listed in North Canaan.

TABLE 6-2 Reported Roof Collapse Damage, 2011

Address	Municipality	Date	Description
205 Wakelee Avenue	Ansonia	2/2/2011	Catholic Charities
Route 44	Barkhamsted	2/4/2011	Barkhamsted Highway Department Salt Shed
8 Railroad Avenue	Beacon Falls	2/2/2011	Manufacturing Corporation
20 Sargent Drive	Bethany	2/2/2011	Fairfield County Millworks

Address	Municipality	Date	Description
50 Hunters Trail	Bethany	2/2/2011	Sun Gold Stables
74 Griffin Road South	Bloomfield	2/14/2011	Home Depot Distribution Center
25 Blue Hill Road	Bozrah	1/27/2011	Kofkoff Egg Farm
135 Albany Turnpike	Canton	2/3/2011	Ethan Allen Design Center
520 South Main Street	Cheshire	1/12/2011	Cheshire Community Pool (Prior to recent ice storm)
1701 Highland Avenue	Cheshire	1/23/2011	Cox Communications
174 East Johnson Avenue	Cheshire	2/2/2011	First Calvary Life Family Worship Center
166 South Main Street	Cheshire	2/3/2011	George Keeler Stove Shop (Historic Building)
1755 Highland Avenue	Cheshire	2/7/2011	Nutmeg Utility Products
45 Shunpike Road (Route 372)	Cromwell	2/2/2011	K Mart (cracks inside and outside - no official collapse)
Cromwell Hills Drive	Cromwell	2/4/2011	Cromwell Gardens
98 West Street	Danbury	1/28/2011	Garage
142 N. Road (Route 140)	East Windsor	2/3/2011	Dawn Marie's Restaurant - Bassdale Plaza Shopping Center
3 Craftsman Road	East Windsor	2/4/2011	Info Shred
140 Mountain Road	Ellington	1/27/2011	Garage Collapse
100 Phoenix Avenue	Enfield	2/1/2011	Brooks Brothers
South Road	Enfield	2/2/2011	Bosco's Auto Garage
175 Warde Terrace	Fairfield	2/3/2011	Parish Court Senior Housing (Ceiling damage - 10 apartments)
19 Elm Tree Road	Glastonbury	2/6/2011	Residence
Unknown	Hampton	1/28/2011	Wood Hill Farm barn collapse - animals died
Gillette Street	Hartford	1/19/2011	Garage
West Street	Hebron	2/2/2011	Residential
Connecticut Route 101	Killingly	2/8/2011	Historic church converted to an office building
759 Boston Post Road	Madison	2/3/2011	Silver Moon, The Brandon Gallery, Madison Coffee Shop and Madison Cinemas (awning began to collapse)
478 Center Street	Manchester	1/28/2011	Lou's Auto Sales and Upholstery
1388 East Main Street	Meriden	1/28/2011	Jacoby's
260 Sherman Avenue	Meriden	2/6/2011	Engine 4 Fire Station
275 Research Parkway	Meriden	2/17/2011	Four Points by Sheraton Carport
1310 South Main Street	Middletown	1/30/2011	Passport Inn Building & Suites
505 Main Street	Middletown	2/2/2011	Accounting firm, converted, mixed use (3 story)
70 Robin Court	Middletown	2/3/2011	Madison at Northwoods Apartment
80 North Main Street	Middletown	2/7/2011	Abandoned warehouse
Pepe's Farm Road	Milford	1/30/2011	Vacant manufacturing building
282 Woodmont Road	Milford	2/2/2011	Kip's Tractor Barn
150 Main St # 1	Monroe	2/2/2011	Monroe Paint & Hardware (Slumping roof, weld broke loose from structural beam)
Route 63	Naugatuck	1/21/2011	Former Plumbing Supply House
410 Rubber Avenue	Naugatuck	2/2/2011	Thurston Oil Company
1210 New Haven Road	Naugatuck	2/4/2011	Rainbowland Nursery School (structural damage)

Address	Municipality	Date	Description
1100 New Haven Road	Naugatuck	2/17/2011	Walmart (structural damage)
290 Goffe Street	New Haven	2/7/2011	New Haven Armory
201 South Main Street	Newtown	2/9/2011	Bluelinx Corp.
80 Comstock Hill	N. a	1/27/2011	Silvermine Stable
Avenue	Norwalk	1/27/2011	Silvermine Stable
5 Town Line Road	Plainville	1/27/2011	Classic Auto Body
130 West Main Street	Plainville	2/2/2011	Congregational Church of Plainville
Terryville Section	Plymouth	1/12/2011	Public Works Garage (Terryville section) -
			taking plow trucks out Midstate Recovery Systems, LLC (waste
286 Airline Avenue	Portland	1/27/2011	transfer station)
			Vacant commercial property (next to
680 Portland-Cobalt	Portland	1/27/2011	Prehistoric Mini Golf - former True Value
Road (Route 66)	Tornana	1/2//2011	Hardware building)
Tryon Street	Portland	1/27/2011	Residential home (sunroof)
Main Street	Portland	1/28/2011	Middlesex Marina
93 Elm Street	Rocky Hill	2/6/2011	Residential garage
99 Bridgeport Avenue	Shelton	2/3/2011	Shell Gas Station
100 Maple Street	Somers	1/27/2011	Lindy Farms (barn)
68 Green Tree Lane	Somers	2/2/2011	Residential
95 John Fitch Boulevard	South Windsor	2/3/2011	South Windsor 10 Pin Bowling Alley
595 Nutmeg Road North	South Windsor	2/8/2011	Waldo Brothers Company
45 Newell Street	Southington	2/2/2011	Yarde Metals
Furnace Avenue	Stafford Springs	2/2/2011	Abandoned mill building
370 South Main Street	Terryville	2/8/2011	Former American Modular
46 Hartford Turnpike	Tolland	2/3/2011	Colonial Gardens
364 High Street	Tolland	2/9/2011	Horse barn
61 Monroe Turnpike	Trumbull	2/1/2011	Trumbull Tennis Center
5065 Main St # L1207	Trumbull	Unknown	Taco Bell
Route 83	Vernon	1/31/2011	Former Clyde Chevrolet
136 Dudley Avenue	Wallingford	1/27/2011	Tri State Tires
1074 South Colony Road	Wallingford	1/29/2011	Zandri's Stillwood Inn
121 N. Main Street	Waterbury	2/2/2011	Former bowling alley (Sena's Lanes)
456 New Park Avenue	West Hartford	2/8/2011	Shell gas station
Island Lane	West Haven	1/27/2011	Commercial building
Unknown	Wethersfield	2/2/2011	Automotive center roof collapse; 10 cars damaged
50 Sage Park Road	Windsor	2/2/2011	Windsor High School (auditorium roof collapse)
1001 Day Hill Road	Windsor	2/7/2011	Mototown USA
27 Lawnacre Road	Windsor Locks	2/7/2011	Long View RV

The overall storm impacts and damages of the winter 2010-2011 storms resulted in Presidential Disaster Declaration 1958-DR for Connecticut. Town officials noted that a small barn collapsed in North Canaan as a result of the 2011 snow load.

# **Existing Capabilities**

Existing programs applicable to flooding and wind are the same as those discussed in Sections 3.0 and 4.0. Programs that are specific to winter storms are generally those related to preparing

plows and sand and salt trucks, tree trimming to protect power lines, and other associated snow removal and response preparations.

The amended Connecticut Building Code specifies that a pressure of 40 pounds per square foot (psf) be used as the base "ground snow load" for computing snow loading for different types of roofs. The International Building code specifies the same pressure for habitable attics and sleeping areas, and specifies a minimum pressure of 40 psf for all other areas. As a result of the winter of 2010-2011, it is anticipated that many communities will develop and utilize programs for roof snow removal.

As it is almost guaranteed that winter storms will occur annually in Connecticut, it is important for municipalities to budget fiscal resources toward snow management. In extreme years, such as the winter of 2010-2011, this budget can be quickly eclipsed and must be supplemented from other budget sources.

CTDOT plows all State roads and Interstates. The Town primarily uses Town staff for plowing operations on the remaining miles of roadway. The Town has four trucks for plowing and two additional smaller trucks that are primarily used for parking lots.

Prior to a winter weather event, the Town ensures that all warning/notification and communications systems are ready and ensures that appropriate equipment and supplies, especially snow removal equipment, are in place and in good working order. In some known problem areas, prestorm treatment is applied to roadways to reduce the accumulation of snow. When available the town uses Ice B' Gone for treatment of roads and a sand/salt combination as needed. The Town also prepares for the possible evacuation and sheltering of some populations that could be impacted by the upcoming storm (especially the elderly and special needs persons).

## 6.5 Vulnerabilities and Risk Assessment

<u>Description</u> – Based on the historic record in Section 6.3, Connecticut experiences at least one major nor'easter every four years although a variety of minor and moderate snow and ice storms occur nearly every winter. According to the 2014 *Connecticut Natural Hazard Mitigation Plan Update*, Connecticut residents can expect at least two or more severe winter weather events per season, including heavy snowstorms, potential blizzards, nor'easters, and potential ice storms. Fortunately, catastrophic ice storms are relatively less frequent in Connecticut than the rest of New England due to the close proximity of the warmer waters of the Atlantic Ocean and Long Island Sound.

According to the 2014 *Connecticut Natural Hazard Mitigation Plan Update*, recent climate change studies predict a shorter winter season for Connecticut (as much as two weeks) and less snow-covered days with a decreased overall snowpack. These models also predict that fewer, more intense precipitation events will occur with more precipitation falling as rain rather than snow. This trend suggests that future snowfalls will consist of heavier (denser) snow, and the potential for ice storms will increase. Such changes will have a large impact on how the state and its communities manage future winter storms and will affect the impact such storms have on the residents, roads, and utilities in the state.

After a storm, snow piled on the sides of roadways can inhibit sight lines and reflect a blinding amount of sunlight. When coupled with slippery road conditions, poor sightlines and heavy glare

create dangerous driving conditions. Stranded motorists, especially senior and/or handicapped citizens, are at particularly high risk of injury or death from exposure during a blizzard. The elderly population in North Canaan, in particular, is susceptible to the impacts created by winter storms due to resource needs (heat, electricity loss, safe access to food, etc.).

The structures and utilities in the town of North Canaan are vulnerable to a variety of winter storm damage. Tree limbs and some building structures may not be suited to withstand high wind and snow loads. Ice can damage or collapse power lines, render steep gradients impassable for motorists, undermine foundations, and cause "flood" damage from freezing water pipes in basements. Drifting snow can occur after large storms, but the effects are generally mitigated through municipal plowing efforts.

Icing causes difficult driving conditions throughout the hillier sections of the town. Exposed hilltops are more at risk to high winds and snow drifts. Drifting snow is a concern on Allendale Road, Allen's Lane and Sodom Road. Snowfall characteristics can vary widely between the valleys and the hilltops. The Town's standard of treatment has been helpful in controlling ice in these problem areas.

Similar to the discussion for hurricanes and summer storms in the previous two sections, no critical facilities are believed to be more susceptible to winter storm damage than any other. Some critical facilities are more susceptible than others to flooding damage due to winter storms. Such facilities susceptible to flooding damage were discussed in Section 3.5.

For municipal property, the Town budget for tree removal and minor repairs is generally adequate to handle winter storm damage although the plowing budget is often depleted. In particular, the heavy snowfalls associated with the winter of 2010-2011 drained the Town's plowing budget and raised a high level of awareness of the danger that heavy snow poses to roofs.

<u>Loss Estimates</u> – The 2014 Connecticut Natural Hazard Mitigation Plan provides annual estimated losses on a countywide basis for several hazards. Based on the population of North Canaan relative to Litchfield County, the annual estimated loss is \$1,696 for severe winter storms. The low figure is likely influenced by the difficulty in separating typical winter storm costs from those associated with extreme events.

<u>Summary</u> – The entire town of North Canaan is at relatively equal risk for experiencing damage from winter storms although some areas (such as icing trouble spots and neighborhoods with a high concentration of flat roofs) are more susceptible. Based on the historic record, it is difficult to determine if any winter storms have resulted in costly damages to the Town as damage estimates for severe storms are generally spread over an entire county. Many damages are relatively site specific and occur to private property (and therefore are paid for by private insurance) while repairs for power outages are often widespread and difficult to quantify to any one municipality.

#### 6.6 Potential Mitigation Strategies and Actions

Potential mitigation measures for flooding caused by winter storms include those appropriate for flooding. These were presented in Section 3.6. Winter storm mitigation measures must also address blizzard, snow, and ice hazards. These are emphasized on the following page.

#### 6.6.1 Prevention

Cold air, wind, snow, and ice cannot be prevented from impacting any particular region. Thus, mitigation is typically focused on property protection and emergency services (discussed below) and prevention of damage related to wind and flooding hazards.

Previous recommendations for tree limb inspections and maintenance in Sections 4.0 and 5.0 are thus applicable to winter storm hazards as well. This can occur in connection with new development and also in connection with redevelopment or roadway reconstruction work. Underground utilities cannot be directly damaged by heavy snow, ice, and winter winds.

## 6.6.2 <u>Property Protection</u>

Property can be protected during winter storms through the use of structural measures such as shutters, storm doors, and storm windows. Pipes should be adequately insulated to protect against freezing and bursting. Compliance with the amended Connecticut Building Code for wind speeds is necessary. Finally, as recommended in previous sections, dead or dangerous tree limbs overhanging homes should be trimmed. All of these recommendations should apply to new construction although they may also be applied to existing buildings during renovations.

Where flat roofs are used on structures, snow removal is important as the heavy load from collecting snow may exceed the bearing capacity of the structure.

FEMA has produced a Snow Load Safety Guidance Document available at http://www.fema.gov/media-library/assets/documents/29670?id=6652. A copy is available in Appendix F of this plan.

This can occur in both older buildings as well as newer buildings constructed in compliance with the most recent building codes. The Town should develop plans to prioritize the removal of snow from critical facilities and other municipal buildings and have funding available for this purpose. Heating coils may also be used to melt or evaporate snow from publicly and privately owned flat roofs.

#### 6.6.3 Emergency Services

Emergency services personnel should continue to identify areas that may be difficult to access during winter storm events and devise contingency plans to continue servicing those areas when regular access is not feasible. The creation of through streets within new developments increases the amount of egress for residents and emergency personnel into neighborhoods.

The Town by default has standardized plowing routes that prioritize access to and from most critical facilities as these facilities are primarily located along state and primary local roads. Residents should be made aware of the plow routes in order to plan how to best access critical facilities, perhaps via posting of the general routes on the Town website. Such routes should also be posted in other municipal buildings such as the library and the post office. It is recognized that plowing critical facilities may not be a priority to all residents as people typically expect their own roads to be cleared as soon as possible.

Available shelters should continue to be advertised and their locations known to the public prior to a storm event. In addition, existing mutual aid agreements with surrounding municipalities should be reviewed and updated as necessary to ensure help will be available when needed.

#### 6.6.4 Public Education and Awareness

The public is typically more aware of the hazardous effects of snow, ice, and cold weather than they are with regard to other hazards discussed in this Plan. Nevertheless, each winter in Connecticut, people are still stranded in automobiles, get caught outside their homes in adverse weather conditions, and suffer heart failure while shoveling. Public education should therefore focus on safety tips and reminders to individuals about how to prepare themselves and their homes for cold and icy weather, including stocking homes, preparing vehicles, and taking care of themselves during winter storms.

Traffic congestion and safe travel of people to and from work can be mitigated by the use of staggered timed releases from work, prestorm closing of schools, and later start times for companies. Many employers and school districts employ such practices. The Town should consider the use of such staggered openings and closings to mitigate congestion during and after severe weather events if traffic conditions warrant.

# 6.6.5 <u>Structural Projects</u>

While structural projects to completely eliminate winter storm damage are not possible, structural projects related to the mitigation of wind (Section 4.6) or flooding damage (Section 3.6) to structures can be effective in the mitigation of winter storm damage. Additional types of structural projects can be designed to mitigate icing due to poor drainage and other factors as well as performing retrofits for flat-roofed buildings such as heating coils or insulating pipes.

#### 6.7 Summary of Specific Mitigation Strategies and Actions

Most of the recommendations in Section 3.6 for mitigating flooding and in Section 4.6 for mitigating wind damage are suitable for reducing certain types of damage caused by winter storms. These are not repeated in this subsection. While many potential mitigation activities for the remaining winter storm hazards were addressed in Section 6.6, the recommended mitigation strategies for mitigating wind, snow, and ice in the town of North Canaan are listed below.

Develop a plan to prioritize snow removal from the roof of critical facilities and other
municipal buildings each winter. Ensure adequate funding is available in the Town budget
for this purpose.
Emergency personnel should continue to identify areas that are difficult to access during
winter storm events and devise contingency plans to access such areas during emergencies.
The Building Department should provide literature regarding appropriate design standards for
mitigating icing, insulating pipes, and retrofits for flat-roofed buildings such as heating coils.
The town should consider utilizing snow fencing in areas prone to snow drift.

In addition, important recommendations that apply to all hazards are listed in Section 10.1.

# 7.0 EARTHQUAKES

# 7.1 Setting

The entire town of North Canaan is susceptible to earthquake damage. However, even though earthquake damage has the potential to occur anywhere both in the town and in the northeastern United States, the effects may be felt differently in some areas based on the type of geology. In general, damaging earthquakes are considered a hazard that is unlikely to occur, but that may cause significant effects to a large area of the Town if one occurred.

# 7.2 <u>Hazard Assessment</u>

An earthquake is a sudden rapid shaking of the earth caused by the breaking and shifting of rock beneath the earth's surface. Earthquakes can cause buildings and bridges to collapse; disrupt gas, electric and telephone lines; and often cause landslides, flash floods, fires, avalanches, and tsunamis. Earthquakes can occur at any time without warning.

The underground point of origin of an earthquake is called its focus; the point on the surface directly above the focus is the epicenter. The magnitude and intensity of an earthquake are determined by the use of the Richter scale and the Mercalli scale, respectively. The Richter scale defines the magnitude of an earthquake. Magnitude is related to the amount of seismic energy released at the hypocenter of the earthquake. It is based on the amplitude of earthquake waves recorded on instruments that have a common calibration. The magnitude of an earthquake is thus represented by a single instrumentally determined value recorded by a seismograph, which records the varying amplitude of ground oscillations.

The magnitude of an earthquake is determined from the logarithm of the amplitude of recorded waves. Being logarithmic, each whole number increase in magnitude represents a tenfold increase in measured strength. Earthquakes with a magnitude of about 2.0 or less are usually called microearthquakes and are generally only recorded locally. Earthquakes with magnitudes of 4.5 or greater are strong enough to be recorded by seismographs all over the world.

The effect of an earthquake on the earth's surface is called the intensity. The Modified Mercalli Intensity Scale consists of a series of key responses such as people awakening, movement of furniture, damage to chimneys, and total destruction. This scale, composed of 12 increasing levels of intensity that range from imperceptible shaking to catastrophic destruction, is designated by Roman numerals. It is an arbitrary ranking based on observed effects. A comparison of Richter magnitude to typical Modified Mercalli intensity is presented in Table 7-1.

Table 7-1 Comparison of Earthquake Magnitude and Intensity

Richter Magnitude	Typical Max. Modified Mercalli Intensity
1.0 to 3.0	I
3.0 to 3.9	II - III
4.0 to 4.9	IV - V
5.0 to 5.9	VI - VII
6.0 to 6.9	VII - IX
7.0 and above	VIII - XII

Unlike seismic activity in California, earthquakes in Connecticut are not associated with specific known faults. Instead, earthquakes with epicenters in Connecticut are referred to as intraplate activity. Bedrock in Connecticut and New England in general is highly capable of transmitting seismic energy; thus, the area impacted by an earthquake in Connecticut can be four to 40 times greater than that of California. For example, the relatively strong earthquake that occurred in Virginia in 2011 was felt in Connecticut because the energy was transmitted over a great distance through hard bedrock.

In addition, population density is up to 3.5 times greater in Connecticut than in California, potentially putting a greater number of people at risk.

The built environment in Connecticut includes old nonreinforced masonry that is not seismically designed. Those who live or work in nonreinforced masonry buildings, especially those built on filled land or unstable soils, are at the highest risk for injury due to the occurrence of an earthquake.

## 7.3 Historic Record

According to the Northeast States Emergency Consortium and the Weston Observatory at Boston College, there were 139 recorded earthquakes in Connecticut between 1668 and 2011. The vast majority of these earthquakes had a magnitude of less than 3.0. The most severe earthquake in Connecticut's history occurred at East Haddam on May 16, 1791. Stone walls and chimneys were toppled during this quake.

# The following is a description of the 12 levels of Modified Mercalli intensity from the USGS:

- I. Not felt except by a very few under especially favorable conditions.
- II. Felt only by a few persons at rest, especially on upper floors of buildings. Delicately suspended objects may swing.
- III. Felt quite noticeably by persons indoors, especially on upper floors of buildings. Many people do not recognize it as an earthquake. Standing motor cars may rock slightly. Vibration similar to the passing of a truck. Duration estimated.
- IV. Felt indoors by many, outdoors by few during the day. At night, some awakened. Dishes, windows, doors disturbed; walls make cracking sound. Sensation like heavy truck striking building. Standing motor cars rocked noticeably.
- V. Felt by nearly everyone; many awakened. Some dishes and windows broken. Unstable objects overturned. Pendulum clocks may stop.
- VI. Felt by all, many frightened. Some heavy furniture moved; a few instances of fallen plaster. Damage slight.
- VII. Damage negligible in buildings of good design and construction; slight to moderate in well-built ordinary structures; considerable damage in poorly built or badly designed structures; some chimneys broken.
- VIII. Damage slight in specially designed structures; considerable damage in ordinary substantial buildings with partial collapse. Damage great in poorly built structures. Fall of chimneys, factory stacks, columns, monuments, walls. Heavy furniture overturned.
- IX. Damage considerable in specially designed structures; well-designed frame structures thrown out of plumb. Damage great in substantial buildings, with partial collapse. Buildings shifted off foundations.
- X. Some well-built wooden structures destroyed; most masonry and frame structures destroyed with foundations. Rails bent.
- XI. Few, if any (masonry) structures remain standing. Bridges destroyed. Rails bent greatly.
- XII. Damage total. Lines of sight and level are distorted. Objects thrown in the air.

Connecticut Natural Hazard Mitigation Plan Update, other municipal hazard mitigation plans, and newspaper articles. ☐ A devastating earthquake near Three Rivers, Quebec on February 5, 1663 caused moderate damage in parts of Connecticut. ☐ Strong earthquakes in Massachusetts in November 1727 and November 1755 were felt strongly in Connecticut. ☐ In April 1837, a moderate tremor occurred at Hartford, causing alarm but little damage. ☐ In August 1840, another moderate tremor with its epicenter 10 to 20 miles north of New Haven shook Hartford buildings but caused little damage. ☐ In October 1845, an Intensity V earthquake occurred in Bridgeport. An Intensity V earthquake would be approximately 4.3 on the Richter scale. On June 30, 1858, New Haven and Derby were shaken by a moderate tremor. ☐ On July 28, 1875, an early morning tremor caused Intensity V damage throughout Connecticut and Massachusetts. ☐ The second strongest earthquake to impact Connecticut occurred near Hebron on November 14, 1925. No significant damage was reported. ☐ The Timiskarning, Ontario earthquake of November 1935 caused minor damage as far south as Cornwall, Connecticut. This earthquake affected one million square miles of Canada and the United States. ☐ An earthquake near Massena, New York in September 1944 produced mild effects in Hartford, Marion, and New Haven, Connecticut. ☐ An Intensity V earthquake was reported in Stamford in March 1953, causing shaking but no On November 3, 1968, another Intensity V earthquake in southern Connecticut caused minor damage in Madison and Chester. ☐ Recent earthquake activity has been recorded near New Haven in 1988, 1989, and 1990 (2.0, 2.8, and 2.8 in magnitude, respectively), in Greenwich in 1991 (3.0 magnitude), and on Long Island in East Hampton, New York in 1992. ☐ On March 11, 2008 there was a 2.0 magnitude earthquake with its epicenter three miles northwest of the center of Chester. ☐ A magnitude 5.0 earthquake struck at the Ontario-Quebec border region of Canada on June 23, 2010. This earthquake did not cause damage in Connecticut but was felt by residents in Hartford and New Haven Counties. ☐ A magnitude 3.9 earthquake occurred 117 miles southeast of Bridgeport, Connecticut on the morning of November 30, 2010. The quake did not cause damage in Connecticut but was felt by residents along Long Island Sound. ☐ A magnitude 2.1 quake occurred near Stamford on September 8, 2012. Dozens of residents reported feeling the ground move, but no injuries were reported. ☐ An earthquake with a magnitude 2.1 was recorded near southeastern Connecticut on November 29, 2013. The earthquake did not cause damage but was felt by residents from Montville to Mystic. ☐ The most recent earthquake to strike Connecticut was a magnitude 2.7 beneath the Town of Deep River on August 14, 2014.

Additional instances of seismic activity occurring in and around Connecticut are provided below,

based on information provided in USGS documents, the Weston Observatory, the 2014

An earthquake of special consideration was a magnitude 5.8 earthquake that occurred 38 miles from Richmond, Virginia on August 23, 2011. The quake was felt from Georgia to Maine and

reportedly as far west as Chicago. Many residents of Connecticut experienced the swaying and shaking of buildings and furniture during the earthquake although widespread damage was constrained to an area from central Virginia to southern Maryland. According to Cornell University, the August 23 quake was the largest event to occur in the east central United States since instrumental recordings have been available to seismologists.

#### 7.4 Existing Capabilities

The Connecticut Building Codes include design criteria for buildings specific to each municipality as adopted by the Building Officials and Code Administrators (BOCA). These include the seismic coefficients for building design in the town of North Canaan. The Town has adopted these codes for new construction, and they are enforced by the Building Official. Due to the infrequent nature of damaging earthquakes, land use policies in the Town do not directly address earthquake hazards. However, various documents do indirectly discuss areas susceptible to earthquake damage and regulations that help to minimize potential earthquake damage:

- □ **Subdivision Regulations**: The 2005 regulations do not explicitly address the issue of construction on steep slopes. The regulations do require that soil erosion and sediment control plans be developed for proposed projects.
- □ *Plan of Conservation and Development:* States that slopes greater than 30% should be left undisturbed. Most of this category is located on the hillside and mountain areas of North Canaan and is especially concentrated in the Canaan Mountain area.
- ☐ **Zoning Regulations:** Section 4.16 states that no permit may be granted unless the land is suitable for multiple dwellings. Land subject to periodic flooding, poor drainage, steep slopes, or a specific hazardous condition, shall not be considered suitable.

#### 7.5 Vulnerabilities and Risk Assessment

According to Cornell University, the earth's crust is far more efficient at propagating seismic waves in the eastern United States than in the west, so even a moderate earthquake can be felt at great distances and over a larger region. The cause of intraplate earthquakes remains a fundamental mystery and this, coupled with the large areas affected, resulted in the August 2011 earthquake in Virginia to be of particular interest to seismologists.

Surficial earth materials behave differently in response to seismic activity. Unconsolidated materials such as sand and artificial fill can amplify the shaking associated with an earthquake. In addition, artificial fill material has

<u>Liquefaction</u> is a phenomenon in which the strength and stiffness of a soil are reduced by earthquake shaking or other rapid loading. It occurs in soils at or near saturation and especially in finer textured soils.

the potential for liquefaction. When liquefaction occurs, the strength of the soil decreases, and the ability of soil to support building foundations and bridges is reduced. Increased shaking and liquefaction can cause greater damage to buildings and structures and a greater loss of life.

As explained in Section 2.3, some areas in the town of North Canaan are underlain by sand and gravel. Figure 2-4 depicts surficial materials in the town. Structures in these areas are at increased risk from earthquakes due to amplification of seismic energy and/or collapse. The best

mitigation for future development in areas of sandy material may be application of the most stringent building codes or possibly the prohibition of new construction. However, many of these areas occur in floodplains associated with the various streams and rivers in North Canaan, so they are already regulated. The areas that are not at increased risk during an earthquake due to unstable soils are the areas in Figure 2-4 underlain by glacial till, which includes most of the town.

Areas of steep slopes can collapse during an earthquake, creating landslides. Seismic activity can also break utility lines such as water mains, electric and telephone lines, and stormwater management systems. Damage to utility lines can lead to fires, especially in electric and gas mains. Dam failure can also pose a significant threat to developed areas during an earthquake. For this Plan, dam failure has been addressed separately in Section 9.0.

In the FEMA HAZUS-MH Estimated Annualized Earthquake Losses for the United States (2008) document, FEMA used probabilistic curves developed by the USGS for the National Earthquakes Hazards Reduction Program to calculate Annualized Earthquake Losses (AEL) for the United States. Based on the results of this study, FEMA calculated

The <u>AEL</u> is the expected losses due to earthquakes each year. Note that this number represents a long-term average; thus, actual earthquake losses may be much greater or nonexistent for a particular year.

the AEL for Connecticut to be \$11,622,000. This value placed Connecticut 30<sup>th</sup> out of the 50 states in terms of AEL. The magnitude of this value stems from the fact that Connecticut has a large building inventory that would be damaged in a severe earthquake and takes into account the lack of damaging earthquakes in the historical record.

According to the 2014 *Connecticut Natural Hazard Mitigation Plan Update*, Connecticut is at a low to moderate risk for experiencing an earthquake of a magnitude greater than 3.5 and at a moderate risk of experiencing an earthquake of a magnitude less than 3.0 in the future. No earthquake with a magnitude greater than 3.5 has occurred in Connecticut within the last 30 years, and the USGS currently ranks Connecticut 43<sup>rd</sup> out of the 50 states for overall earthquake activity.

A series of earthquake probability maps was generated using the 2009 interactive web-based mapping tools hosted by the USGS. These maps were used to determine the probability of an earthquake of greater than magnitude 5.0 or greater than magnitude 6.0 damaging the town of North Canaan. Results are presented in Table 7-2 below.

Table 7-2
Probability of a Damaging Earthquake in the Vicinity of North Canaan

Time Frame (Years)	Probability of the Occurrence of an Earthquake Event > Magnitude 5.0	Probability of the Occurrence of an Earthquake Event > Magnitude 6.0
50	1%	< 1%
100	2% to 3%	< 1%
250	6% to 8%	1% to 2%
350	8% to 10%	2% to 3%

Based on the historic record and the probability maps generated from the USGS database, the state of Connecticut possesses areas of seismic activity. It is likely that Connecticut will continue to experience minor earthquakes (magnitude less than 3.0) in the future. While the risk of an earthquake affecting North Canaan is relatively low over the short term, long-term probabilities suggest that a damaging earthquake (magnitude greater than 5.0) could occur within the vicinity of North Canaan.

# **HAZUS-MH Simulations**

The 2014 Connecticut Natural Hazard Mitigation Plan Update utilizes four "maximum plausible" earthquake scenarios (three historical, one potential) within HAZUS-MH to generate potential earthquake risk to the State of Connecticut. These same four scenarios were simulated within HAZUS-MH (using the default year 2000 building inventories and census data) to generate potential damages in North Canaan. The four events are as follows:

Magnitude 5.7, epicenter in Portland, CT, based on historic event
 Magnitude 5.7, epicenter in Haddam, CT, based on historic event
 Magnitude 6.4, epicenter in East Haddam, CT, based on historic event
 Magnitude 5.7, epicenter in Stamford, CT, magnitude based on USGS probability mapping

The results for each HAZUS-MH earthquake simulation are presented in Appendix C and presented below. These results are believed conservative and considered appropriate for planning purposes in North Canaan. Note that potentially greater impacts could also occur.

Table 7-3 presents the number of residential buildings (homes) damaged by the various earthquake scenarios, while Table 7-4 presents the total number of buildings damaged by each earthquake scenario. A significant percentage of building damage is to residential buildings, while other building types include agriculture, commercial, education, government, industrial, and religious buildings. The exact definition of each damage state varies based on building construction. See Chapter 5 of the *HAZUS-MH Earthquake Model Technical Manual*, available on the FEMA website, for the definitions of each building damage state based on building construction.

Table 7-3
HAZUS-MH Earthquake Scenarios – Number of Residential Buildings Damaged

Epicenter Location and Magnitude	Slight Damage	Moderate Damage	Extensive Damage	Complete Damage	Total
Haddam – 5.7	40	7	None	None	47
Portland – 5.7	35	6	None	None	41
Stamford – 5.7	27	5	None	None	32
East Haddam – 6.4	95	23	2	None	120

Table 7-4
HAZUS-MH Earthquake Scenarios – Total Number of Buildings Damaged

Epicenter Location and Magnitude	Slight Damage	Moderate Damage	Extensive Damage	Complete Damage	Total
Haddam – 5.7	49	10	1	None	60
Portland – 5.7	42	8	1	None	51
Stamford – 5.7	33	6	1	None	40
East Haddam – 6.4	125	33	4	None	162

The HAZUS simulations consider a subset of critical facilities termed "essential facilities" which are important during emergency situations. As shown in Table 7-5, minor damage to essential facilities is expected for each earthquake scenario.

Table 7-5
HAZUS-MH Earthquake Scenarios – Essential Facility Damage

Epicenter Location and Magnitude	Police Stations (1)	Schools (1)
Haddam – 5.7	Minor damage (86% functionality)	Minor damage (86% functionality)
Portland – 5.7	Minor damage (86% functionality)	Minor damage (86% functionality)
Stamford – 5.7	Minor damage (88% functionality)	Minor damage (88% functionality)
East Haddam – 6.4	Minor damage (72% functionality)	Minor damage (73% functionality)

Table 7-6 presents potential damage to utilities and infrastructure based on the various earthquake scenarios. The HAZUS-MH software assumes that the North Canaan transportation network and utility network includes the following:

- ☐ Highway: 14 major roadway bridges and 5 important highway segments;
- ☐ Railway: 7 major segments;
- ☐ A potable water system consisting of 111 total kilometers of pipelines;
- ☐ A waste water system consisting of 67 total kilometers of pipelines and;
- ☐ A total of 44 kilometers of natural gas lines

The HAZUS-MH software is based on a national database that assumes each town has infrastructure such as water and wastewater facilities and gas pipelines. It is understood that North Canaan does not have this level of infrastructure.

As shown in Table 7-6, highway bridges are predicted to experience minor damage under each earthquake scenario. Water, sewer, and gas lines are expected to have leaks and breaks, no loss of potable water or electrical service is expected. No displacement of people due to fire is expected.

Table 7-6
HAZUS-MH Earthquake Scenarios – Utility, Infrastructure, and Fire Damage

Epicenter Location and Magnitude	Transportation Network	Utilities	Fire Damage
Haddam – 5.7	Minor damage to transportation infrastructure (\$0.03 million to bridges)	1 leak in potable water system (<\$0.01 million). No loss of service expected. Total damage: Approximately <\$0.01 million.	Fire damage will displace no people.
Portland – 5.7	Minor damage to transportation infrastructure (\$0.03 million to bridges)	1 leak in potable water system (<\$0.01 million). No loss of service expected. Total damage: Approximately <\$0.01 million.	Fire damage will displace no people.
Stamford – 5.7	Minor damage to transportation infrastructure (\$0.02 million to bridges)	1 leak in potable water system (<\$0.01 million). No loss of service expected. Total damage: Approximately <\$0.01 million.	Fire damage will displace no people.
East Haddam – 6.4	Minor damage to transportation infrastructure (\$0.49 million to bridges)	4 leaks and 1 major break in potable water system (\$0.02 million), 2 leaks and 1 major break in waste water system (\$0.01 million) and 1 leak in natural gas system (\$0.01 million). No loss of service expected. Total damage: Approximately \$0.04 million.	Fire damage will displace no people.

Debris is not expected for any earthquake scenarios. However, it is expected that at least minor debris will be generated should an earthquake occur.

Table 7-7 presents the potential sheltering requirements based on the various earthquake events simulated by HAZUS-MH. The predicted sheltering requirements for <u>earthquake damage</u> (not including fire damage in Table 7-6) are necessary for only the East Haddam earthquake scenario. However, it is possible that an earthquake could also produce a dam failure (flooding) or be a contingent factor in another hazard event that could increase the overall sheltering need in the community.

Table 7-7
HAZUS-MH Earthquake Scenarios – Shelter Requirements

Epicenter Location and Magnitude	Number of Displaced Households	Short Term Sheltering Need (Number of People)
Haddam – 5.7	None	None
Portland – 5.7	None	None
Stamford – 5.7	None	None
East Haddam – 6.4	1	1

Table 7-8 presents the casualty estimates generated by HAZUS-MH for the various earthquake scenarios. Casualties are broken down into four severity levels that describe the extent of injuries. The levels are as follows:

Severity Level 1:	Injuries will requ	ire medical attentior	n but hospitalization	is not needed;
			•	

<sup>☐</sup> Severity Level 2: Injuries will require hospitalization but are not considered life-threatening;

- ☐ Severity Level 3: Injuries will require hospitalization and can become life-threatening if not promptly treated; and
- ☐ Severity Level 4: Victims are killed by the earthquake.

Table 7-8
HAZUS-MH Earthquake Scenarios – Casualty Estimates

Epicenter Location - Magnitude	2 AM Earthquake	2 PM Earthquake	5 PM Earthquake	
Haddam – 5.7	None	None	None	
Portland – 5.7	ortland – 5.7 None		None	
Stamford – 5.7	None	None	None	
East Haddam – 6.4	1 (Level 1)	1 (Level 1)	None	

All earthquake scenarios cause only minor injuries or no injury at all.

Table 7-9 presents the total estimated losses and direct economic impact that may result from the four earthquake scenarios created for North Canaan as estimated by the HAZUS-MH software. Capital damage loss estimates include the subcategories of building, contents, and inventory damages. The direct property damage losses are the estimated costs to repair or replace the damage caused to the building or its contents. Business interruption loss estimates include the subcategories of lost income, relocation expenses, and lost wages. The business interruption losses are associated with the inability to operate a business due to the damage sustained during an earthquake, and also include temporary living expenses for those people displaced from their home because of the earthquake. Note that these damages do not include transportation, utility, or fire damage in Table 7-6.

Table 7-9
HAZUS-MH Estimated Direct Losses from Earthquake Scenarios

<b>Epicenter Location</b>	<b>Estimated Total</b>	Estimated Total	<b>Estimated Total</b>	
and Magnitude	Capital Losses	Income Losses	Losses	
Haddam – 5.7	\$730,000	\$190,000	\$920,000	
Portland – 5.7	\$580,000	\$160,000	\$750,000	
Stamford – 5.7	\$390,000	\$120,000	\$510,000	
East Haddam – 6.4	\$2,440,000	\$660,000	\$3,100,000	

The maximum simulated damage considering direct losses and infrastructure losses is approximately \$3.1 million for the East Haddam scenario. Note that the losses are presented in 2006 dollars, which implies that they will be greater in the future due to inflation. It is also believed that the next plan update will be able to utilize 2010 census data within HAZUS-MH, providing a more recent dataset for analysis.

Despite the low probability of occurrence of damaging earthquakes, this analysis demonstrates that earthquake damage presents a potential hazard to North Canaan. Additional infrastructure not modeled by HAZUS-MH, such as water treatment facilities, sewer pumping stations, and water storage tanks, could be affected by an earthquake.

# 7.6 Potential Mitigation Strategies and Actions

As earthquakes are difficult to predict and can affect the entire Town of North Canaan potential mitigation can only include adherence to building codes, education of residents, and adequate planning.

Requiring adherence to current State building codes for new development and redevelopment is necessary to minimize the potential risk of earthquake damage. Communities may consider preventing new residential development in areas that are most at risk to collapse or liquefaction. Many Connecticut communities already have regulations restricting development on steep slopes. Additional regulations could be enacted to buffer development a certain distance from the bottom of steep slopes, or to prohibit development on fill materials and areas of fine sand and clay. The State Geologist indicates that such deposits have the highest risk for seismic wave amplification. Other regulations could specify a minimum level of compaction for filled areas before it is approvable for development.

Departments providing emergency services should have backup plans and adequate backup facilities such as portable generators in place in case earthquake damage occurs to critical facilities, particularly public water and the waste water treatment facilities. The Highway Department should also have adequate backup plans and facilities to ensure that roads can be opened as soon as possible after a major earthquake.

The fact that damaging earthquakes are rare occurrences in Connecticut heightens the need to educate the public about this potential hazard. An annual pamphlet outlining steps each family can take to be prepared for disaster is recommended. Also, because earthquakes generally provide little or no warning time, municipal personal and students should be instructed on what to do during an earthquake in a manner similar to fire drills.

Critical facilities may be retrofitted to reduce potential damage from seismic events. Potential mitigation activities may include bracing of critical equipment such as generators, identifying and hardening critical lifeline systems, utilizing flexible piping where possible, and installing shutoff valves and emergency connector hoses where utilities cross fault lines. Potential seismic mitigation measures for all buildings include strengthening and retrofitting non-reinforced masonry buildings and non-ductile concrete facilities that are particularly vulnerable to ground shaking, retrofitting building veneers to prevent failure, installing window films to prevent injuries from shattered glass, anchoring rooftop-mounted equipment, and reinforcing masonry chimneys with steel bracing.

If the event that a damaging earthquake occurs, North Canaan would activate its Emergency Operations Plan and initiate emergency response procedures as necessary.

#### 7.7 Summary of Specific Strategies and Actions

The recommende	ed mitigation	strategies fo	or mitigating	earthquak	es in the	town of I	North (	Canaan
are listed below.								

Consider preventing new residential development in areas prone to collapse.
Ensure that municipal departments have adequate backup plans and adequate backup
facilities such as portable generators in place in case earthquake damage occurs to critical
facilities.

☐ The town may consider bracing systems and assets inside critical facilities. This could help protect IT systems, important records and files.
In addition, important recommendations that apply to all hazards are listed in Section 10.1.

#### 8.0 DAM FAILURE

## 8.1 **Setting**

Dam failures can be triggered suddenly, with little or no warning, and often from other natural disasters such as floods and earthquakes. Dam failures often occur during flooding when the dam breaks under the additional force of floodwaters. In addition, a dam failure can cause a chain reaction where the sudden release of floodwaters causes the next dam downstream to fail. With two inventoried high hazard dam within town limits, and potentially several other minor dams in the town, dam failure can affect almost any part of Salisbury. While flooding from a dam failure generally has a moderate geographic extent, the effects are potentially catastrophic. Fortunately, a major dam failure is considered only a possible hazard event in any given year.

## 8.2 Hazard Assessment

The Connecticut DEEP administers the statewide Dam Safety Program and designates a classification to each state-inventoried dam based on its potential hazard.

Class AA dams are negligible hazard potential dams that upon failure would result in no
measurable damage to roadways and structures, and negligible economic loss.
Class A dams are low hazard potential dams that upon failure would result in damage to
agricultural land and unimproved roadways, with minimal economic loss.
Class BB dams are moderate hazard potential dams that upon failure would result in damage
to normally unoccupied storage structures, damage to low volume roadways, and moderate
economic loss.
Class B dams are significant hazard potential dams that upon failure would result in possible
loss of life; minor damage to habitable structures, residences, hospitals, convalescent homes,
schools, and the like; damage or interruption of service of utilities; damage to primary
roadways; and significant economic loss.
Class C dams are high potential hazard dams that upon failure would result in loss of life and
major damage to habitable structures, residences, hospitals, convalescent homes, schools, and
main highways with great economic loss.

As of 2013, there were ten DEEP-inventoried dams within the town of North Canaan. These dams are shown in Figure 8-1. Two of these dams are considered high or significant hazard (Class B or C). These high or significant hazard dams are owned by the Connecticut DEEP. Failure of these structures may have an impact on North Canaan.

This section primarily discusses the possible effects of failure of high and significant hazard (Class B and C) dams. Failure of a Class C dam has a high potential for loss of life and extensive property and infrastructure damage.

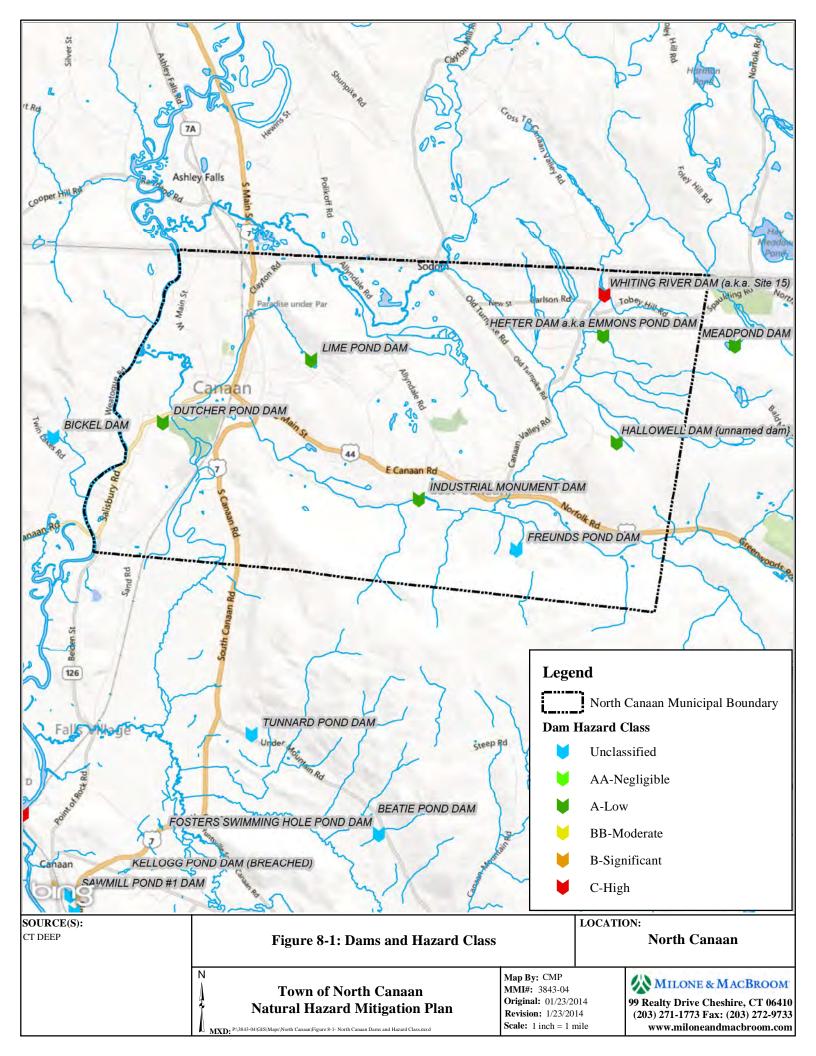


Table 8-1
High Hazard Dams with Potential to Affect the Town of North Canaan

Number	Name	Location	Class	Owner
10001	Whiting River Dam	Whiting River, North Canaan	C	Connecticut DEEP
10004	Industrial Monument Dam	Blackberry River, North Canaan	В	Connecticut DEEP

## 8.3 <u>Historic Record</u>

Approximately 200 notable dam and reservoir failures occurred worldwide in the 20th century. More than 8,000 people died in these disasters. The following is a listing of some of the more catastrophic dam failures in Connecticut's recent history:

- □ 1938 and 1955: Exact numbers of dam failures caused by these floods are unavailable, but the Connecticut DEEP believes that more dams were damaged in these events than in the 1982 event listed below or the 2005 dam failure events listed below.
- ☐ 1961: Crystal Lake Dam in Middletown failed, injuring three and severely damaging 11 homes.
- ☐ 1963: Failure of the Spaulding Pond Dam in Norwich caused six deaths and \$6 million in damage.
- ☐ June 5-6, 1982: Connecticut experienced a severe flood that caused 17 dams to fail and seriously damaged 31 others. Failure of the Bushy Hill Pond Dam in Deep River caused \$50 million in damages, and the remaining dam failures caused nearly \$20 million in damages.

The Connecticut DEEP reported that the sustained heavy rainfall from October 7 to 15, 2005 caused 14 complete or partial dam failures and damage to 30 other dams throughout the state. A sample of damaged dams is summarized in Table 8-2.

Table 8-2
Dams Damaged Due to Flooding From October 2005 Storms

Number	Name	Location	Class	Damage Type	Ownership
	Somerville Pond Dam	Somers		Partial Breach	DEEP
4701	Windsorville Dam	East Windsor	BB	Minor Damage	Private
10503	Mile Creek Dam	Old Lyme	В	Full Breach	Private
	Staffordville Reservoir #3	Union		Partial Breach	CT Water Co.
8003	Hanover Pond Dam	Meriden	C	Partial Breach	City of Meriden
	ABB Pond Dam	Bloomfield		Minor Damage	Private
4905	Springborn Dam	Enfield	BB	Minor Damage	DEEP
13904	Cains Pond Dam	Suffield	A	Full Breach	Private
13906	Schwartz Pond Dam	Suffield	BB	Partial Breach	Private
14519	Sessions Meadow Dam	Union	BB	Minor Damage	DEEP

The Association of State Dam Safety Officials states that no one knows precisely how many dam failures have occurred, but they have been documented in every state. From January 1, 2005 through January 1, 2009, state dam safety programs reported 132 dam failures and 434 incidents requiring intervention to prevent failure.

## 8.4 Existing Capabilities

The Dam Safety Section of the Connecticut DEEP Inland Water Resources Division is charged with the responsibility for administration and enforcement of Connecticut's dam safety laws. The existing statutes require that permits be obtained to construct, repair, or alter dams and that existing dams be inventoried and periodically inspected to assure that their continued operation does not constitute a hazard to life, health, or property.

The dam safety requirements are codified in Sections 22a-401 through 22a-411 inclusive of the Connecticut General Statutes. Sections 22a-409-1 and 22a-409-2 of the Regulations of Connecticut State Agencies have been enacted and set requirements for the registration, classification, and inspection of dams. Dams must be inventoried by the owner with the Connecticut DEEP according to Connecticut Public Act 83-38.

Dam inspection regulations require that nearly 700 dams in Connecticut be inspected annually. The DEEP currently performs inspections of those dams which pose

Dams regulated by the Connecticut DEEP must be designed to pass the 1% annual chance rainfall event with one foot of freeboard, a factor of safety against overtopping.

Significant and high hazard dams are required to meet a design standard greater than the 1% annual chance rainfall event.

the greatest potential threat to downstream persons and properties, and also performs inspections as complaints are registered.

Dams found to be unsafe under the inspection program must be repaired by the owner. Depending on the severity of the identified deficiency, an owner is allowed reasonable time to make the required repairs or remove the dam. If a dam owner fails to make necessary repairs to the subject structure, the Connecticut DEEP may issue an administrative order requiring the owner to restore the structure to a safe condition and may refer noncompliance with such an order to the Attorney General's office for enforcement. As a means of last resort, the Connecticut DEEP Commissioner is empowered by statute to remove or correct, at the expense of the owner, any unsafe structures that present a clear and present danger to public safety.

Owners of Class C dams have traditionally been required to maintain Emergency Operation Plans (EOPs). Guidelines for dam EOPs were published by DEEP in 2012, creating a uniform approach for development of EOPs. As dam owners develop EOPs using the new guidance, DEEP anticipates that the quality of EOPs will improve, which will ultimately help reduce vulnerabilities to dam failures.

Important dam safety program changes are underway in Connecticut. Public Act No. 13-197, *An Act Concerning the Dam Safety Program and Mosquito Control*, passed in June 2013 and describes new requirements for dams related to registration, maintenance, and EOPs, which will be called emergency action plans (EAPs) moving forward. This Act requires owners of certain unregistered dams or similar structures to register them by October 1, 2015. The Act generally shifts regularly scheduled inspection and reporting requirements from the DEEP to the owners of dams. The Act also makes owners generally responsible for supervising and inspecting construction work and establishes new reporting requirements for owners when the work is completed.

Effective October 1, 2013, the owner of any high or significant hazard dam (Class B and C) must develop and implement an EAP after the Commissioner of DEEP adopts regulations. The EAP shall be updated every two years, and copies shall be filed with DEEP and the chief executive officer of any municipality that would potentially be affected in the event of an emergency. New regulations shall establish the requirements for such EAPs, including but not limited to (1) criteria and standards for inundation studies and inundation zone mapping; (2) procedures for monitoring the dam or structure during periods of heavy rainfall and runoff, including personnel assignments and features of the dam to be inspected at given intervals during such periods; and (3) a formal notification system to alert appropriate local officials who are responsible for the warning and evacuation of residents in the inundation zone in the event of an emergency.

The CT DEEP also administers the Flood and Erosion Control Board program, which can provide noncompetitive state funding for repair of municipality-owned dams. Funding is limited by the State Bond Commission. State statute Section 25-84 allows municipalities to form Flood and Erosion Control Boards, but municipalities must take action to create the board within the context of the local government such as by revising the municipal charter. The Town's Planning and Zoning Commission currently regulates development in flood zones and through their review of development activities within the town.

The Town uses the Alert Now/Blackboard Connect emergency notification system for emergency notification. The dam failure inundation mapping discussed in the next section can be used to help streamline the geographic contact areas if the failure of a major dam is imminent.

## 8.5 Vulnerabilities and Risk Assessment

The following section primarily discusses known vulnerable areas located downstream of Class B and C dams. Dam failure analyses have been prepared for many of the high hazard dams, and these are included in the EAPs. The inundation limits portrayed in the dam failure analysis maps represent a highly unlikely, worst-case scenario (1,000-year) flood event and should be used for emergency action planning only. These analyses should not be interpreted to imply that the dams evaluated are not stable, that the routine operation of the dams presents a safety concern to the public, or that any particular structure downstream of the dam is at imminent risk of being affected by a dam failure.

### Whiting River Dam (Dam No. 10001) – Whiting River, North Canaan

The Whiting River Flood Dam is located on the Whiting River and impounds a storage volume of 5,000 acre-feet from a contributing watershed of 14.14 square miles. The earthen dam was constructed in 1968 and is 80 feet in height and 580 feet in length. It is owned by the Connecticut DEEP and used to impound a reservoir for flood control. Repairs were completed in 1997, which included removing accumulated sediments.

### Industrial Monument Dam (Dam No. 10004) – Blackberry River, North Canaan

The Industrial Monument Dam (aka Lower Pond Dam) is a class B run-of-the-river masonry dam located off of Lower Road at Beckley Furnace Industrial Monument State Park. The overall length of the dam is approximately 180 feet and the maximum height is 19 feet. The 1.5-acre impoundment has a storage volume of 11 acre-feet from a drainage area of 39.85 square miles. It is owned by the Connecticut DEEP and used to impound a reservoir for recreation.

Due to the dam and impoundment size, the October 2012 EOP notes that it is not anticipated that a dam breach would generate an extreme flood wave that would cause tremendous damage to downstream areas. The dam hazard area includes a privately owned bridge located 370 feet downstream of the dam. Inundation or loss of this bridge would isolate two residential properties located south of the river. In September 1977, a flood washed out this crossing and stranded these two residential properties. Therefore, it is critical that the Town of North Canaan notify these properties to evacuate prior to either the bridge or its approach roadways becoming inundated by floodwaters.

Loss Estimates – Based on the information available for the Whiting River Dam and the Industrial Monument Dam, it is not feasible to utilize HAZUS-MH to directly determine the losses associated with failure of either dam. Furthermore, because the Whiting River was not specifically analyzed by HAZUS for the cumulative flood losses described in Section 3.5, flood losses along the Whiting River cannot be used to approximate dam failure losses.

However, the statements in the Industrial Monument Dam EOP indicate that downstream damage would not be severe if the dam were to fail. The EOP also states that two properties could be isolated if a bridge were washed out, as occurred during a flood in 1977. Based on the EOP, the losses associated with a failure of the Industrial Monument Dam would likely be less than \$1 million for property damage, with loss of life unlikely.

Failure of the Whiting River dam would likely be a more severe incident than failure of the Industrial Monument Dam. However, the Whiting River dam was designed for flood control and is maintained for this purpose. Therefore, the impoundment is not full and failure is unlikely.

#### 8.6 **Potential Mitigation Strategies and Actions**

Dam failure presents a very real potential hazard to the town of North Canaan. The town should maximize its emergency preparedness for a potential dam failure by including potential inundation areas in the Town's Alert Now/Blackboard Connect emergency notification database. The town may also wish to revise its dam failure inundation mapping to be based on a "more likely" failure scenario than a failure during the PMF event. The analyses presented in Section 8.5 indicate that the majority of the inundation areas from each failure are related to the PMF and not to floodwaters from a dam failure occurring under normal flow conditions. For dams without a mapped failure inundation area, the 1% annual chance floodplain described in Section 3.1 could be utilized to provide approximate inundation areas.

The Town should inform private dam owners of potential resources available to them through various governmental agencies upon request. In particular, the Town should be prepared to provide technical assistance to private dam owners

FEMA and the Association of Dam Safety Officials have a variety of resources available for dam owners. More information can be found at http://www.fema.gov and at http://www.damsafetv.org/resources/downloads/

should they wish to develop Dam Failure Analyses and EOPs.

The Town should work with the Connecticut DEEP to stay up to date on the evolution of any EOPs/EAPs and Dam Failure Analyses for the high and significant hazard dams in and around North Canaan should any be produced. In addition, copies of these documents should be made available in the Town Hall for reference and public viewing, with a posted caveat that these documents show the potential inundation area for a dam failure caused by an extreme flood event that is very unlikely to occur.

## 8.7 <u>Summary of Mitigation Strategies and Actions</u>

The recommended mitigation strategies for dam failure in the Town of North Canaan are listed below. In addition, there are several suggested potential mitigation strategies that are applicable to all hazards in this plan. These are outlined in the Section 10.1.

Include dam failure inundation areas in the Alert Now/Blackboard Connect emergency
contact database.
Provide technical assistance to private dam owners regarding effective maintenance
strategies.
File EOPs/EAPs with town departments and emergency personnel.

With the legislature passed in 2013, dam assessment and management capabilities will continue to increase in the state. Subsequent updates to this plan will revisit dams and discuss the outcomes of the legislation and any new regulations administered by the Connecticut DEEP.

### 9.0 WILDFIRES

## 9.1 **Setting**

The ensuing discussion about fires is generally focused on the undeveloped wooded and shrubby areas of North Canaan, along with low-density suburban type development found at the margins of these areas known as the wildland interface.

The town of North Canaan is generally considered a high risk area for small wildfires but a low risk area for large wildfires. Wildfires are of particular concern in outlying areas without public water service and other areas with poor access for fire-fighting equipment. Hazards associated with wildfires include property damage and loss of habitat. Wildfires of any type are considered a likely event each year but, when one occurs, it is generally contained to a small range with limited damage to nonforested areas.

### 9.2 Hazard Assessment

Wildfires are any nonstructure fire, other than a prescribed burn, that occurs in undeveloped areas. They are considered to be highly destructive, uncontrollable fires. Although the term brings to mind images of tall trees engulfed in flames, wildfires can occur as brush and shrub fires, especially under dry conditions. Wildfires are also known as "wildland fires." According to the U.S. Bureau of Land Management, each of three elements (known as the fire triangle) must be present in order to have any type of fire:

☐ Fuel – Without fuel, a fire will stop. Fuel can be removed naturally (when the fire has consumed all burnable fuel) or manually by mechanically or chemically removing fuel from the fire. In structure



The Fire Triangle. Public Domain Image Hosted by Wikimedia Commons.

fires, removal of fuel is not typically a viable method of fire suppression. Fuel separation is important in wildfire suppression and is the basis for controlling prescribed burns and suppressing other wildfires. The type of fuel present in an area can help determine overall susceptibility to wildfires. According to the Forest Encyclopedia Network, four types of fuel are present in wildfires:

- o Ground Fuels, consisting of organic soils, forest floor duff, stumps, dead roots, and buried fuels
- o Surface Fuels, consisting of the litter layer, downed woody materials, and dead and live plants to two meters in height
- o Ladder Fuels, consisting of vine and draped foliage fuels
- o Canopy Fuels, consisting of tree crowns
- ☐ Heat Without sufficient heat, a fire cannot begin or continue. Heat can be removed through the application of a substance, such as water, powder, or certain gases, that reduces the amount of heat available to the fire. Scraping embers from a burning structure also removes the heat source.

☐ Oxygen – Without oxygen, a fire cannot begin or continue. In most wildland fires, this is commonly the most abundant element of the fire triangle and is therefore not a major factor in suppressing wildfires.

Nationwide, humans have caused approximately 90% of all wildfires in the last decade. Accidental and negligent acts include unattended campfires, sparks, burning debris, and irresponsibly discarded cigarettes. The remaining 10% of fires are caused primarily by lightning. According to the USGS, wildfires can increase the potential for flooding, debris flows, or landslides; increase pollutants in the air; temporarily destroy timber, foliage, habitats, scenic vistas, and watershed areas; and have long-term impacts such as reduced access to recreational areas, destruction of community infrastructure, and reduction of cultural and economic resources.

Nevertheless, wildfires are also a natural process, and their suppression is now recognized to have created a larger fire hazard as live and dead vegetation accumulates in areas where fire has been prevented. In addition, the absence of fire has altered or disrupted the cycle of natural plant succession and wildlife habitat in many areas. Consequently, federal, state, and local agencies are committed to finding ways such as prescribed burning to reintroduce fire into natural ecosystems while recognizing that fire fighting and suppression are still important.

Connecticut has a particular vulnerability to fire hazards where urban development and wildland areas are in close proximity. The "wildland/urban interface" is where many such fires are fought. Wildland areas are subject to fires because of weather conditions and fuel supply. An isolated wildland fire may not be a threat, but the combined effect of having residences, businesses, and lifelines near a wildland area causes increased risk to life and property. Thus, a fire that might have been allowed to burn itself out with a minimum of fire fighting or containment in the past is now fought to prevent fire damage to surrounding homes and commercial areas as well as smoke threats to health and safety in these areas.

## 9.3 Historic Record

According to the Connecticut DEEP Forestry Division, much of Connecticut was deforested by settlers and turned into farmland during the colonial period. A variety of factors in the 19<sup>th</sup> century caused the decline of farming in the state, and forests reclaimed abandoned farm fields. In the early 20<sup>th</sup> century, deforestation again occurred in Connecticut, this time for raw materials needed to ship goods throughout the world. Following this deforestation, shipping industries in Connecticut began to look to other states for raw materials, and the deciduous forests of today began to grow in the state.

During the early 20<sup>th</sup> century, wildfires regularly burned throughout Connecticut. Many of these fires began accidentally by sparks from railroads and industry while others were deliberately set to clear underbrush in the forest and provide pasture for livestock. A total of 15,000 to 100,000 acres of land was burned annually during this period. This destruction of resources led to the creation of the position of the State Forest Fire Warden and led to a variety of improved coordination measures described in Section 9.4.

According to the USDA Forest Service Annual Wildfire Summary Report for 1994 through 2003, an average of 600 acres per year in Connecticut was burned by wildfires. The National Interagency Fire Center (NIFC) reports that a total of 3,448 acres of land burned in Connecticut

from 2002 through 2012 due to 2,334 nonprescribed wildfires, an average of 1.5 acres per fire and 313 acres per year (Table 9-1).

The Connecticut DEEP Forestry Division estimates the average acreage burned per year statewide to be much higher (1,300 acres per year) in the 2014 *Connecticut Natural Hazard Mitigation Plan Update*. The Connecticut DEEP also states that the primary cause of wildland fires in seven of the eight counties is undetermined, with the secondary cause being arson or debris burning. In general, the wildland fires in Connecticut are small and detected quickly, with most of the largest wildfires being contained to less than 10 acres in size.

Table 9-1
Wildland Fire Statistics for Connecticut

Year	Number of Wildland Fires	Acres Burned	Number of Prescribed Burns	Acres Burned	Total Acres Burned
2012	180	417	4	42	459
2011	196	244	7	42	286
2010	93	262	6	52	314
2009	264	246	6	76	322
2008	330	893	6	68	961
2007	361	288	7	60	348
2006	322	419	6	56	475
2005	316	263	10	130	393
2004	74	94	12	185	279
2003	97	138	8	96	234
2002	101	184	13	106	290
Total	2,334	3,448	85	913	4,361

Source: National Interagency Fire Center

Traditionally, the highest forest fire danger in Connecticut occurs in the spring from mid-March to mid-May. The worst wildfire year for Connecticut in the recent past occurred during the extremely hot and dry summer of 1999. Over 1,733 acres of Connecticut burned in 345 separate wildfires, an average of about five acres per fire. Only one wildfire occurred between 1994 and 2003 that burned over 300 acres, and a wildfire in 1986 in the Mattatuck State Forest in the town of Watertown, Connecticut burned 300 acres.

Due to a reduced snowpack and dry conditions, March 2012 was Connecticut's most recent month of high wildfire risk. A forest fire burned about 25 acres at Devil's Hopyard State Park in East Haddam on March 26-27, 2012.

No major wildfires have been reported in North Canaan in several years.

## 9.4 Existing Capabilities

Connecticut enacted its first statewide forest fire control system in 1905, when the state was largely rural with very little secondary growth forest. By 1927, the state had most of the statutory foundations for today's forest fire control programs and policies in place such as the State Forest Fire Warden system, a network of fire lookout towers and patrols, and regulations regarding open

burning. The severe fire weather in the 1940s prompted the state legislature to join the Northeastern Interstate Forest Fire Protection Compact with its neighbors in 1949.

The technology used to combat wildfires has significantly improved since the early 20<sup>th</sup> century. An improved transportation network, coupled with advances in firefighting equipment, communication technology, and training, has improved the ability of firefighters to minimize damage due to wildfires in the state. For example, radio and cellular technologies have greatly improved firefighting command capabilities. Existing mitigation for wildland fire control is typically focused on Fire Department training and maintaining an adequate supply of equipment. Firefighters are typically focused on training for either structural fires or wildland fires and maintain a secondary focus on the opposite category.

The Connecticut DEEP Division of Forestry monitors the weather each day during nonwinter months as it relates to fire danger. The Division utilizes precipitation and soil moisture data to compile and broadcast daily forest fire probability forecasts. Forest fire danger levels are classified as low, moderate, high, very high, or extreme. In addition, the National Weather Service issues a Red Flag warning when winds will be sustained or there will be frequent gusts above a certain threshold (usually 25 mph), the relative humidity is below 30%, and precipitation for the previous five days has been less than one-quarter inch. Such conditions can cause wildfires to quickly spread from their source area.

In addition, the Connecticut DEEP has recently changed its Open Burning Program. It now requires individuals to be nominated and designated by the Chief Executive Officer in each municipality that allows open burning to take an online training course and exam to become certified as an "Open Burning Official." Permit template forms were also revised that provides permit requirements so that the applicant/permittee is made aware of the requirements prior to, during and post burn activity. The regulated activity is then overseen by the town. North Canaan is compliant with this program and has a designated Burning Official.

The town responds to fires in the State Forest before the state responds, and the local departments can utilize mutual aid agreements with surrounding towns and assemble up to 60 responders if needed. Town officials indicated that there are hydrants in the downtown areas and fire ponds are located on the outskirts of town.

Unlike the west coast of the United States where the fires are allowed to burn toward development and then stopped, the North Canaan Fire Department goes to the fires whenever possible. This proactive approach is believed to be effective for controlling wildfires. The Fire Department has some water storage capability in its tanker trucks and storage tanks but primarily relies on the use of the municipal water system to fight fires throughout the town whenever possible.

Regulations regarding fire protection are also outlined in the Subdivision Regulations.

□ Subdivision Regulations, Section III states that each subdivision plan shall provide for adequate water supply, stormwater drainage, surface water drainage, sanitary sewer disposal, fire hydrants, utilities, sidewalks, curbs and any other improvements, in amounts and locations considered necessary by the Commission in amounts and locations considered necessary by the Commission to protect health, safety and the general welfare.

Finally, the DEEP Forestry Division uses rainfall data from a variety of sources to compile forest fire probability forecasts. This allows the DEEP and the Town to monitor the drier areas of the state to be prepared for forest fire conditions.

Other capabilities for reducing wildfire risk include:

Encouraging property owners to widen access roads such that fire trucks and other emergency
vehicles can access remote locations.
Continuing intermunicipal cooperation in firefighting efforts.
Providing outreach programs on how to properly manage burning and campfires on private
property.
Patrolling Town-owned and State-owned open space and parks to prevent unauthorized
campfires.
Enforcing regulations and permits for open burning.

### 9.5 Vulnerabilities and Risk Assessment

Today, most of Connecticut's forested areas are secondary growth forests. According to the Connecticut DEEP, forest has reclaimed over 500,000 acres of land that was used for agriculture in 1914. However, that new forest has been fragmented in the past few decades by residential development. The urban/wildland interface is increasing each year as sprawl extends further out from Connecticut's cities. It is at this interface that the most damage to buildings and infrastructure occurs.

The most common causes of wildfires are arson, lightning strikes, and fires started from downed trees hitting electrical lines. Thus, wildfires have the potential to occur anywhere and at any time in both undeveloped and lightly developed areas. The extensive forests and fields covering the state are prime locations for a wildfire. In many areas, structures and subdivisions are built abutting forest borders, creating areas of particular vulnerability.

Wildfires are more common in rural areas than in developed areas as most fires in populated areas are quickly noticed and contained. The likelihood of a severe wildfire developing is lessened by the vast network of water features in the state, which create natural breaks likely to stop the spread of a fire. During long periods of drought, these natural features may dry up, increasing the vulnerability of the state to wildfires.

According to the Connecticut DEEP, the overall forest fire risk in Connecticut is low due to several factors. First, the overall <u>incidence</u> of forest fires is very low (an average of 215 fires per year occurred in Connecticut from 2002 to 2010, which is a rate slightly higher than one per municipality per year). Secondly, as the wildfire/forest fire prone areas become fragmented due to development, the local fire departments have increased access to those neighborhoods for firefighting equipment. Third, the problematic interface areas such as driveways too narrow to permit emergency vehicles are site specific. Finally, trained firefighters at the local and state level are readily available to fight fires in the state, and intermunicipal cooperation on such instances is common. However, local risk is not necessarily the same as the overall statewide risk.

As suggested by the historic record presented in Section 9.3, most wildfires in Connecticut are relatively small. In the drought year of 1999, the average wildfire burned five acres in

comparison to the two most extreme wildfires recorded since 1986 that burned 300 acres each. Given the availability of firefighting water in the town, including the use of nearby water bodies, it is believed that this average value for a drought year and the extreme value are applicable to the town as well.

Large areas of Forest are located in North Canaan. There hasn't been a major forest fire in the last ten years, but the town remains concerned about future fires, especially in the vicinity of Canaan Mountain, and would like to find ways to reduce risks posed by forest fires.

Finally, the Plan of Conservation and Development states that "because there is no public water service beyond the Fire District, it is recommended that the provision be made for dry hydrants to be located at certain rivers in outlying parts of town to give the fire department locations in these areas where tanker trucks can be refilled. Currently the only dry hydrant is near the state DOT garage. Suggested locations for the dry hydrants are identified in the POCD and are as follows:

Konkopot River – One at Clayton Road near Allyndale; one at Allyndale Road before
Sodom.
Whiting River – One on Toby Hill Road between Canaan Valley Road and Emmons Lane.
Blackberry River – One on Route 44 near the intersection with Canaan Valley Road.
Housatonic River – One on Route 44 near intersection with Bond Street.

<u>Loss Estimates</u> – The 2014 Connecticut Natural Hazard Mitigation Plan provides annual estimated losses on a countywide basis for several hazards. Based on the population of North Canaan relative to Litchfield County, the annual estimated loss is \$978 for wildfires. This figure is relatively low and it may not represent the true risks in North Canaan.

## 9.6 Potential Mitigation Strategies and Actions

Potential mitigation measures for wildfires include a mixture of prevention, education, and emergency planning. Although educational materials are available through the Fire Department, they should be made available at other municipal offices as well. Education of homeowners on methods of protecting their homes is far more effective than trying to steer growth away from potential wildfire areas, especially given that the available land that is environmentally appropriate for development may be forested.

Water system maintenance and improvements are an important class of potential mitigation for fires. For addressing remote areas, the town may consider a combination of forest fuel reduction, patrols, monitoring, coordination with DEEP, installing dry hydrants or fire ponds, and improved access.

## 9.7 Summary of Specific Strategies and Actions

The	following	strategies	could	be in	nplement	ted to	mitigate	fire	risl	k:
-----	-----------	------------	-------	-------	----------	--------	----------	------	------	----

_	For the areas of elevated wildfire risk such as Canaan Mountain, the town may consider a
	combination of all of the available methods of risk reduction.
<b>-</b>	The Town should consider requiring a source of fire protection water such as distarts or of

The Town should consider requiring a source of fire protection water, such as cisterns or dry
wells when municipal water service is not available for residential or commercial building
development.

n addition, spec	eific recommend	ations that appl	y to all hazards	are listed in Sect	ion 10.1.
<i>,</i> 1		11 .	,		

#### 10.0 HAZARD MITIGATION STRATEGIES AND ACTIONS

Recommendations that are applicable to two, three, or four hazards were discussed in the applicable subsections of Sections 3.0 through 9.0 although not necessarily repeated in each subsection. For example, placing utilities underground is a recommendation for hurricane, summer storm, winter storm, and wildfire mitigation. Public education and awareness is a type of mitigation applicable to all hazards because it includes recommendations for improving public safety and planning for emergency response. Instead of repeating these recommendations in section after section of this Plan, these are described below.

## 10.1 Additional Strategies and Actions

Strategies that are applicable to a small number of hazards were discussed in the applicable subsections of Sections 3.0 through 9.0. For example, placing utilities underground is a strategy for hurricane, summer storm, winter storm, and wildfire mitigation. A remaining class of "all-hazard" strategies is applicable to all hazards, because it includes actions for improving public safety and planning for emergency response.

A community warning system that relies on radios and television is less effective at warning residents during the night when the majority of the community is asleep. As noted in Section 2.9, the town recently switched to Blackboard Connect for the reverse 911-type notifications. This system provides emergency notifications to phones (text messages or calls) but can be used for non-emergency messages too. The town can also send email blasts. The Town should utilize these systems to their fullest capabilities. Databases should be set up as best possible for hazards with a specific geographic extent, particularly flooding and dam failure. Residents should also be encouraged to purchase a NOAA weather radio containing an alarm feature. In addition, the Town EOP should continue to be reviewed and updated at least once annually.

#### 10.2 Summary of Proposed Strategies and Actions

For planning purposes, it is important for the town to have long term strategies that are memorialized in this document. Therefore, strategies and actions have been presented throughout this document in individual sections as related to each hazard. This section lists specific strategies of the Plan without any priority ranking. Strategies that span multiple hazards are only reprinted once in this section under the most appropriate hazard event. Refer to the matrix in Appendix A for strategies with scores based on the STAPLEE methodology described in Section 1.0.

#### All Hazards

Utilize the existing Alert Now/Blackboard Connect emergency notification system to its
fullest capabilities.
Encourage residents to purchase and use NOAA weather radios with alarm features.
Review and update the town EOP at least once annually

# Flooding Prevention ☐ Consider requiring at least one foot of freeboard to the Floodplain Management Regulations. ☐ Require developers to demonstrate whether detention or retention of stormwater is the best option for reducing peak flows downstream of a project and provide a design for the appropriate alternative. Property Protection ☐ Consider conducting a Camp Brook watershed study to identify appropriate methods of reducing flood risks. ☐ Encourage property owners to purchase flood insurance under the NFIP and to report claims when flooding damage occurs. ☐ Evaluate floodprone properties such as the North Canaan Firehouse to determine potential flood damage reduction methods. ☐ Consider elevations or acquisitions of homes along Camp Brook that are prone to flooding. **Public Education** ☐ Compile a checklist that cross-references the bylaws, regulations, and codes related to flood damage prevention that may be applicable to a proposed project and make this list available to potential applicants. The information in Section 3.4 provides a starting point for this list. ☐ Provide outreach regarding home elevation and relocation, flood barriers, dry floodproofing, wet floodproofing, and other home improvement techniques (Section 3.6.2) to private homeowners and businesses with flood risk. ☐ Provide outreach regarding which types of mitigation options are appropriate for reducing flood insurance premiums [this is based on a comment provided by one of the survey participants from North Canaan]. ☐ Ensure that the appropriate municipal personnel are trained in flood damage prevention methods. Natural Resource Protection ☐ Pursue the acquisition of additional municipal open space inside SFHAs and set it aside as greenways, parks, or other nonresidential, noncommercial, or nonindustrial use. ☐ Selectively pursue conservation recommendations listed in the Plan of Conservation and Development and other studies and documents. Structural Projects ☐ Review culvert conveyances based on existing hydrology and Northeast Regional Climate Center guidance. ☐ When replacing or upgrading culverts, work with CT DOT to incorporate findings of the climate change pilot study and work with HVA to incorporate findings of the stream crossing assessment training. ☐ Consider evaluating drainage issues through the town and develop a list of culverts to replace

and increase capacities.

	Replace and increase the capacity of the Route 44 culvert at Church Street. Work with the State to replace and increase the capacity of the Camp Brook culvert.
<u>Em</u>	ergency Services
	Ensure adequate barricades are available to block flooded areas in floodprone areas of the town.
	Evaluate flood risks in the vicinity of the North Canaan Firehouse to determine if mitigation actions are necessary. Potential mitigation actions may include construction of a berm or floodwall, floodproofing the building or relocating facilities onsite.
Wi	nd Damage Related to Hurricanes, Summer Storms, and Winter Storms
	Develop a town wide tree limb inspection and maintenance programs to ensure that the potential for downed power lines is diminished.
	The Building Department should provide literature regarding appropriate design standards for wind.
	Encourage the use of structural techniques related to mitigation of wind damage in new residential and commercial structures to protect new buildings to a standard greater than the minimum building code requirements. Require such improvements for new municipal critical facilities.
Wi	nter Storms
	Develop a plan to prioritize snow removal from the roof of critical facilities and other municipal buildings each winter. Ensure adequate funding is available in the Town budget for this purpose.
	Emergency personnel should continue to identify areas that are difficult to access during winter storm events and devise contingency plans to access such areas during emergencies.
	The Building Department should provide literature regarding appropriate design standards for mitigating icing, insulating pipes, and retrofits for flat-roofed buildings such as heating coils.
	The town should consider utilizing snow fencing in areas prone to snow drift.
Ear	<u>thquakes</u>
	Consider preventing new residential development in areas most prone to collapse or liquefaction.
	Ensure that municipal departments have adequate backup plans and adequate backup facilities such as portable generators in place in case earthquake damage occurs to critical facilities.
	The town may consider bracing systems and assets inside critical facilities. This could help protect IT systems, important records and files.

## Dam Failure

ш	Include dam failure inundation areas in the Alert Now/Blackboard Connect emergency contact database.
	Provide technical assistance to private dam owners regarding effective maintenance strategies.
	File EOPs/EAPs with town departments and emergency personnel.
Wi	<u>ldfires</u>
	For the areas of elevated wildfire risk, such as Canaan Mountain, the town may consider a combination of all of the available methods of risk reduction.
	The Town should consider requiring a source of fire protection water, such as cisterns or dry wells when municipal water service is not available for residential or commercial building development.
	•

## 10.3 Priority Strategies and Actions

As discussed in Section 1.4, the STAPLEE method was used to score mitigation activities. The STAPLEE matrix in Appendix A ranks the mitigation activities proposed in Section 10.1 and 10.2 and lists possible funding sources. While some of these strategies may exceed five years for completion, the town's top ten priority strategies may be completed within five years and the actions are as follows:

- 1. Consider conducting a Camp Brook watershed study to identify appropriate methods of reducing flood risks.
- 2. Review culvert conveyances based on existing hydrology and Northeast Regional Climate Center guidance.
- 3. When replacing or upgrading culverts, work with CT DOT to incorporate findings of the climate change pilot study and work with HVA to incorporate findings of the stream crossing assessment training.
- 4. Evaluate drainage issues in the town and develop a list of culverts to replace and increase capacities.
- 5. Work with the State to replace and increase the capacity of the Camp Brook culvert.
- 6. Replace and increase the capacity of the Route 44 culvert at Church Street.
- 7. Consider elevations or acquisitions of homes along Camp Brook that are prone to flooding.
- 8. Evaluate floodprone properties such as the North Canaan Firehouse to determine potential flood damage reduction methods.
- 9. Consider requiring at least one foot of freeboard to the Floodplain Management Regulations.
- 10. Consider installing additional dry hydrants or fire ponds in outlying parts of town where public water is not readily available for firefighting, including the areas identified in Section 9.5 of this plan.

### 10.4 Sources of Funding and Technical Assistance

The following sources of funding and technical assistance may be available for the priority projects listed above. This information comes from the FEMA website (http://www.fema.gov/government/grant/index.shtm). Funding requirements and contact information is given in Section 11.4.

#### **Community Disaster Loan Program**

http://www.fema.gov/government/grant/fs\_cdl.shtm

This program provides funds to any eligible jurisdiction in a designated disaster area that has suffered a substantial loss of tax and other revenue. The assistance is in the form of loans not to exceed twenty-five percent of the local government's annual operating budget for the fiscal year in which the major disaster occurs, up to a maximum of five million dollars.

## **Continuing Training Grants (CTG)**

http://www.grants.gov/web/grants/search-grants.html

This program provides funds to develop and deliver innovative training programs that are national in scope and meet emerging training needs in local communities.

## **Emergency Food and Shelter Program**

http://www.fema.gov/government/grant/efs.shtm

This program was created in 1983 to supplement the work of local social service organizations, both private and governmental, to help people in need of emergency assistance.

#### **Emergency Management Institute**

http://training.fema.gov/

Provides training and education to the floodplain managers, fire service, emergency management officials, its allied professions, and the general public.

## **Emergency Management Performance Grants**

http://www.fema.gov/emergency/empg/empg.shtm

The Emergency Management Performance Grant (EMPG) is designed to assist local and state governments in maintaining and strengthening the existing all-hazards, natural and manmade, emergency management capabilities. Allocations if this fund is authorized by the 9/11 Commission Act of 2007, and grant amount is determined demographically at the state and local level.

## Flood Mitigation Assistance (FMA) Program

http://www.fema.gov/government/grant/fma/index.shtm

The FMA was created as part of the National Flood Insurance Reform Act of 1994 with the goal of reducing or eliminating claims under the NFIP. FEMA provides funds in the form of planning grants for Flood Mitigation Plans and project grants to implement measures to reduce flood losses, including elevation, acquisition, or relocation of NFIP-insured structures.

Repetitive loss properties are prioritized under this program. This grant program is administered through the DEMHS.

## **Hazard Mitigation Grant Program (HMGP)**

http://www.fema.gov/government/grant/hmgp/index.shtm

The HMGP provides grants to States and local governments to implement long-term hazard mitigation measures after a major disaster declaration. The purpose of the HMGP is to reduce the loss of life and property due to natural disasters and to enable mitigation measures to be implemented during the immediate recovery from a disaster. This grant program is administered through the DEMHS.

## **Homeland Security Grant Program (HSGP)**

http://www.fema.gov/government/grant/hsgp/index.shtm

The objective of the HSGP is to enhance the response, preparedness, and recovery of local, State, and tribal governments in the event of a disaster or terrorist attack. Eligible applicants include all 50 states, the District of Columbia, Puerto Rico, American Samoa, Guam, Northern Mariana Islands, and the Virgin Islands. Risk and effectiveness, along with a peer review, determine the amount allocated to each applicant.

### Intercity Passenger Rail (IPR) Program

http://www.fema.gov/fy-2013-intercity-passenger-rail-ipr-amtrak-0

This program provides funding to the National Passenger Railroad Corporation (Amtrak) to protect critical surface transportation infrastructure and the traveling public from acts of terrorism, and to increase the resilience of the Amtrak rail system.

#### National Flood Insurance Program (NFIP)

http://www.fema.gov/library/viewRecord.do?id=3005

This program enables property owners in participating communities to purchase insurance as a protection against flood losses in exchange for State and community floodplain management regulations that reduce future flood damages. Municipalities that join the associated Community Rating System can gain discounts of flood insurance for their residents.

## **Nonprofit Security Grant Program (NSGP)**

http://www.fema.gov/fy-2014-urban-areas-security-initiative-uasi-nonprofit-security-grant-program-nsgp

This program provides funding support for hardening and other physical security enhancements to nonprofit organizations that are at high risk of terrorist attack and located within one of the specific Urban Areas Security Initiative (UASI)-eligible Urban Areas. The program seeks to integrate the preparedness activities of nonprofit organizations that are at high risk of terrorist attack with broader state and local preparedness efforts, and serve to promote coordination and collaboration in emergency preparedness activities among public and private community representatives and state and local government agencies.

## Pre-Disaster Mitigation (PDM) Grant Program

http://www.fema.gov/government/grant/pdm/index.shtm

The purpose of the PDM program is to fund communities for hazard mitigation planning and the implementation of mitigation projects prior to a disaster event. PDM grants are provided to states, territories, Indian tribal governments, communities, and universities, which, in turn, provide sub-grants to local governments. PDM grants are awarded on a competitive basis. This grant program is administered through the DEMHS.

#### **Public Assistance Grant Program**

http://www.fema.gov/government/grant/pa/index.shtm

The Public Assistance Grant Program (PA) is designed to assist State, Tribal and local governments, and certain types of private non-profit organizations in recovering from major disasters or emergencies. Along with helping to recover, this grant also encourages prevention against potential future disasters by strengthening hazard mitigation during the recovery process. The first grantee to apply and receive the PA would usually be the State, and the State could then allocate the granted funds to the sub-grantees in need of assistance.

#### **Small Town Economic Assistance Program**

http://www.ct.gov/opm/cwp/view.asp?Q=382970&opmNav

The Small Town Economic Assistance Program (STEAP) funds economic development, community conservation and quality of life projects for localities that are ineligible to receive Urban Action bonds. This program is administered by the Connecticut Office of Policy and Management (OPM). Connecticut municipalities may receive up to \$500,000 per year if (1) they are not designated as a distressed municipality or a public investment community, and (2) the State Plan of Conservation and Development does not show them as having a regional center. Public Act 05-194 allows an Urban Act Town that is not designated as a regional center under the State Plan of Conservation and Development to opt out of the Urban Action program and become a STEAP town for a period of four years.

#### **Transit Security Grant Program (TSGP)**

http://www.fema.gov/government/grant/tsgp/index.shtm

The purpose of TSGP is to bolster security and safety for public transit infrastructure within Urban Areas throughout the United States. Applicable grantees include only the state Governor and the designated State Administrative Agency (SAA) appointed to obligate program funds to the appropriate transit agencies.

#### **U.S. Fire Administration**

#### **Assistance to Firefighters Grant Program (AFGP)**

http://www.firegrantsupport.com/afg/ http://www.usfa.dhs.gov/fireservice/grants/

The primary goal of the Assistance to Firefighters Grants (AFG) is to meet the firefighting and emergency response needs of fire departments and nonaffiliated emergency medical services organizations. Since 2001, AFG has helped firefighters and other first responders to

obtain critically needed equipment, protective gear, emergency vehicles, training, and other resources needed to protect the public and emergency personnel from fire and related hazards. The Grant Programs Directorate of the Federal Emergency Management Agency administers the grants in cooperation with the U.S. Fire Administration.

#### Fire Prevention & Safety Grants (FP&S)

http://www.firegrantsupport.com/fps/

The Fire Prevention and Safety Grants (FP&S) are part of the Assistance to Firefighters Grants (AFG) and are under the purview of the Grant Programs Directorate in the Federal Emergency Management Agency. FP&S grants support projects that enhance the safety of the public and firefighters from fire and related hazards. The primary goal is to target high-risk populations and mitigate high incidences of death and injury. Examples of the types of projects supported by FP&S include fire prevention and public safety education campaigns, juvenile firesetter interventions, media campaigns, and arson prevention and awareness programs.

## **National Fire Academy Education and Training**

http://www.usfa.dhs.gov/nfa/

Provides training to increase the professional level of the fire service and others responsible for fire prevention and control.

## **Reimbursement for Firefighting on Federal Property**

http://www.usfa.dhs.gov/fireservice/grants/rfff/

Reimbursement may be made to fire departments for fighting fires on property owned by the federal government for firefighting costs over and above normal operating costs. Claims are submitted directed to the U.S. Fire Administration.

#### **Staffing for Adequate Fire & Emergency Response (SAFER)**

http://www.firegrantsupport.com/safer/

The goal of SAFER is to enhance the local fire departments' abilities to comply with staffing, response and operational standards established by NFPA and OSHA (NFPA 1710 and/or NFPA 1720 and OSHA 1910.134 - see http://www.nfpa.org/SAFERActGrant for more details). Specifically, SAFER funds should assist local fire departments to increase their staffing and deployment capabilities in order to respond to emergencies whenever they may occur. As a result of the enhanced staffing, response times should be sufficiently reduced with an appropriate number of personnel assembled at the incident scene. Also, the enhanced staffing should provide that all front-line/first-due apparatus of SAFER grantees have a minimum of four trained personnel to meet the OSHA standards referenced above. Ultimately, a faster, safer and more efficient incident scene will be established and communities will have more adequate protection from fire and fire-related hazards.

## **Other Grant Programs**

## Flood Mitigation

funds match.

	U.S. Army Corps of Engineers – 50/50 match funding for floodproofing and flood preparedness projects.
	U.S. Department of Agriculture – financial assistance to reduce flood damage in small watersheds and to improve water quality.
	CT Department of Energy and Environmental Protection – assistance to municipalities to solve flooding and dam repair problems through the Flood and Erosion Control Board Program.
Erc	osion Control and Wetland Protection
	U.S. Department of Agriculture – <i>technical assistance for erosion control</i> .  North American Wetlands Conservation Act Grants Program – <i>funding for projects that</i>

support long term wetlands acquisition, restoration, and/or enhancement. Requires a 1-to-1

#### 11.0 PLAN IMPLEMENTATION

## 11.1 <u>Implementation Strategy and Schedule</u>

The Town of North Canaan is authorized to update this hazard mitigation plan as described below and guide it through the FEMA approval process.

As individual recommendations of the hazard mitigation plan are implemented, they must be implemented by the municipal departments that oversee these activities. The Office of the First Selectman in the Town of North Canaan will primarily be responsible for developing and implementing selected projects. A "local coordinator" will be selected as the primary individual in charge; this is the First Selectman. Appendix A incorporates an implementation strategy and schedule, detailing the responsible department and anticipated time frame for the specific recommendations listed throughout this document.

Upon adoption, the Plan will be made available to all Town departments and agencies as a planning tool to be used in conjunction with existing documents. It is expected that revisions to other Town plans and regulations, such as the Plan of Conservation and Development, department annual budgets, and the Zoning and Subdivision Regulations, will reference this plan and its updates. The local coordinator and Office of the First Selectman will be responsible for ensuring that the actions identified in this plan are incorporated into ongoing Town planning activities, and that the information and requirements of this plan are incorporated into existing planning documents within five years from the date of adoption or when other plans are updated, whichever is sooner.

The local coordinator and Office of the First Selectman will be responsible for assigning appropriate Town officials to update the Plan of Conservation and Development, Zoning Regulations, Subdivision Regulations, Wetlands Regulations, and Emergency Operations Plan to include the provisions in this plan. Should a general revision be too cumbersome or cost prohibitive, simple addendums to these documents will be added that include the provisions of this plan. The Plan of Conservation and Development and the Emergency Operations Plan are the two documents most likely to benefit from the inclusion of the Plan in the Town's library of planning documents. The Plan of Conservation and Development should be updated in the next few years, which will provide an opportunity to incorporate elements of hazard mitigation into the document.

Finally, information and projects in this planning document may be included in the annual budget and capital improvement plans as part of implementing the projects recommended in this plan.

## 11.2 Progress Monitoring and Public Participation

The local coordinator will be responsible for monitoring the successful implementation of this HMP, and will provide the linkage between the multiple departments involved in hazard mitigation at the local level relative to communication and participation. As the plans will be adopted by the local government, coordination is expected to be able to occur without significant barriers.

<u>Site reconnaissance for Specific Suggested Actions</u> – The local coordinator, with the assistance of appropriate department personnel, will annually perform reconnaissance-level inspections of sites that are associated with specific actions. Examples include structural projects. This will ensure that the suggested actions remain viable and appropriate. The worksheet in Appendix F will be filled out for specific project-related actions as appropriate. This worksheet is taken from the *Local Mitigation Planning Handbook*.

The local coordinator will be responsible for obtaining a current list of repetitive loss properties (RLPs) in the community each year, although it is understood that currently the towns lacks any RLPs. This list is available from the State NFIP Coordinator. The RLPs shall be subject to a windshield survey at least once every two years to ensure that the list is reasonably accurate

relative to addresses and other basic information. Some of the reconnaissance-level inspections could occur incidentally during events such as flooding when response is underway.

Repetitive loss properties to be viewed biennially

<u>Annual Reporting and Meeting</u> – The local coordinator will be responsible for holding an annual meeting to review the plan. Matters to be reviewed on an annual basis include the goals and objectives of the HMP, hazards or disasters that occurred during the preceding year, mitigation activities that have been accomplished to date, a discussion of reasons that implementation may be behind schedule, and suggested actions for new projects and revised activities. Results of site reconnaissance efforts will be reviewed also. A meeting should be conducted in March or April of each year, at least two months before the annual application cycle for grants under the HMA

program<sup>4</sup>. This will enable a list of possible projects to be circulated to applicable local departments to review and provide sufficient time to develop a grant application. The local coordinator shall prepare and maintain documentation and minutes of this annual review meeting.

Annual meeting to be conducted in March or April each year

<u>Post-Disaster Reporting and Metering</u> – Subsequent to federally-declared disasters in the State of Connecticut for Litchfield County, a meeting shall be conducted by the local coordinator with representatives of appropriate departments to develop a list of possible projects for developing an HMGP application. The local coordinator shall prepare a report of the recent events and ongoing

or recent mitigation activities for discussion and review at the HMGP meeting. Public outreach may be solicited for HMGP applications at a *separate* public meeting.

Meeting to be conducted within two months of each Federal disaster declaration in Connecticut

<u>Continued Public Involvement</u> – Continued public involvement will be sought regarding the monitoring, evaluating, and updating of the HMP. Public input can be solicited through community meetings, presentations on local cable access channels, and input to web-based information gathering tools. Public comment on changes to the HMP may be sought through posting of public notices and notifications posted on the town's web site and the regional planning organization website.

<sup>&</sup>lt;sup>4</sup> PDM and FMA applications are typically due to the State in summer of any given year.

## 11.3 Updating the Plan

The town will update the hazard mitigation plan if a consensus to do so is reached by the local coordinator and the Office of the First Selectman, or at least once every five years. Updates to this HMP will be coordinated by the local coordinator. The town understands that this HMP will be considered current for a period of five years from the date of approval with the expiration date reported by FEMA via the approval letter. The local coordinator will be responsible for compiling the funding required to update the HMP in a timely manner such that the current plan will not expire while the plan update is being developed; the assistance of NWCCOG may be solicited from time to time for this purpose.

Table 11-1 presents a schedule to guide the preparation for the plan update and then the actual update of the plan. The schedule assumes that the current version of this plan was adopted in December 2014 and will therefore expire in December 2019.

Table 11-1 Schedule for Hazard Mitigation Plan Update

Month and Year	Tasks
December 2015	Annual meeting to review plan content and progress
December 2016	Annual meeting to review plan content and progress
June 2017	Ensure that funding for the plan update is included in the
	fiscal year 2017-2018 budget
December 2017	Annual meeting to review plan content and progress
December 2018	Annual meeting to review plan content and progress
January 2019	Secure consultant to begin updating the plan, or begin
	updating in-house (Public Works/Engineering Dept.)
August 2019	Forward draft updated plan to DEMHS for review
September 2019 -	Process edits from DEMHS and FEMA and obtain the
November 2019	Approval Pending Adoption (APA)
December 2019	Adopt updated plan

To update the Plan, the local coordinator will coordinate the appropriate group of local officials consisting of representatives of many of the same departments solicited for input to this HMP. In addition, local business leaders, community and neighborhood group leaders, relevant private and non-profit interest groups, and the neighboring municipalities will be solicited for representation, including the following:

The regional planning organization
Town of Canaan
Town of Salisbury
Town of Norfolk
Town of Sheffield, New York

The project action worksheets prepared by the local coordinator and annual reports described above will be reviewed. In addition, the following questions will be asked:

☐ Do the mitigation goals and objectives still reflect the concerns of local residents, business owners, and officials?

	Have local conditions changed so that findings of the risk and vulnerability assessments should be updated?	
	Are new sources of information available that will improve the risk assessment?	
	If risks and vulnerabilities have changed, do the mitigation goals and objectives still reflect the risk assessment?	
	What hazards have caused damage locally since the last edition of the HMP was developed? Were these anticipated and evaluated in the HMP or should these hazards be added to the plan?	
	Are current personnel and financial resources at the local level sufficient for implementing mitigation actions?	
	For each mitigation action that has not been completed, what are the obstacles to implementation? What are potential solutions for overcoming these obstacles?	
	For each mitigation action that has been completed, was the action effective in reducing risk?	
	What mitigation actions should be added to the plan and proposed for implementation?	
	If any proposed mitigation actions should be deleted from the plan, what is the rationale?	
Future HMP updates may include deleting suggested actions as projects are completed, adding suggested actions as new hazard effects arise, or modifying hazard vulnerabilities as land use changes. For instance, several prior actions were removed from the HMP while preparing this		

## 11.4 Technical and Financial Resources

This Section is comprised of a list of resources to be considered for technical assistance and potentially financial assistance for completion of the actions outlined in this Plan. This list is not all-inclusive and is intended to be updated as necessary.

update because they had become institutionalized capabilities, they were successfully completed,

## **Federal Resources**

## **Federal Emergency Management Agency**

or they were subsumed by more specific local or State actions.

Region I 99 High Street, 6<sup>th</sup> floor Boston, MA 02110 (617) 956-7506 http://www.fema.gov/

## **Mitigation Division**

The Mitigation Division is comprised of three branches that administer all of FEMA's hazard mitigation programs. The **Risk Analysis Branch** applies planning and engineering principles

to identify hazards, assess vulnerabilities, and develop strategies to manage the risks associated with natural hazards. The **Risk Reduction Branch** promotes the use of land use controls and building practices to manage and assess risk in both the existing built developments and future development areas in both pre- and post-disaster environments. The **Risk Insurance Branch** mitigates flood losses by providing affordable flood insurance for property owners and by encouraging communities to adopt and enforce floodplain management regulations.

FEMA Programs administered by the Risk Analysis Branch include:

	Flood Hazard Mapping Program, which maintains and updates National Flood Insurance Program maps		
	National Dam Safety Program, which provides state assistance funds, research, and training in dam safety procedures		
	National Hurricane Program, which conducts and supports projects and activities that help protect communities from hurricane hazards		
	Mitigation Planning, a process for states and communities to identify policies, activities,		
	and tools that can reduce or eliminate long-term risk to life and property from a hazard event		
FEMA Programs administered by the Risk Reduction Branch include:			
	Hazard Mitigation Grant Program (HMGP), which provides grants to states and local governments to implement long-term hazard mitigation measures after a major disaster declaration		
	Flood Mitigation Assistance Program (FMA), which provides funds to assist states and communities to implement measures that reduce or eliminate long-term risk of flood damage to structures insurable under the National Flood Insurance Program		
	Pre-Disaster Mitigation Grant Program (PDM), which provides program funds for hazard mitigation planning and the implementation of mitigation projects prior to a disaster event		
	Community Rating System (CRS), a voluntary incentive program under the National Flood Insurance Program that recognizes and encourages community floodplain		
	management activities  National Earthquake Hazards Reduction Program (NEHRP), which in conjunction with state and regional organizations supports state and local programs designed to protect citizens from earthquake hazard		

The Risk Insurance Branch oversees the *National Flood Insurance Program (NFIP)*, which enables property owners in participating communities to purchase flood insurance. The NFIP assists communities in complying with the requirements of the program and publishes flood hazard maps and flood insurance studies to determine areas of risk.

FEMA also can provide information on past and current acquisition, relocation, and retrofitting programs, and has expertise in many natural and technological hazards. FEMA also provides funding for training state and local officials at Emergency Management Institute in Emmitsburg, Maryland.

The Mitigation Directorate also has *Technical Assistance Contracts (TAC)* in place that support FEMA, states, territories, and local governments with activities to enhance the effectiveness of natural hazard reduction program efforts. The TACs support FEMA's

responsibilities and legislative authorities for implementing the earthquake, hurricane, dam safety, and floodplain management programs. The range of technical assistance services provided through the TACs varies based on the needs of the eligible contract users and the natural hazard programs. Contracts and services include:

☐ The Hazard Mitigation Technical Assistance Program (HMTAP) Contract- supporting post-disaster program needs in cases of large, unusual, or complex projects; situations where resources are not available; or where outside technical assistance is determined to be needed. Services include environmental and biological assessments, benefit/cost analyses, historic preservation assessments, hazard identification, community planning, training, and more.

## Response & Recovery Division

As part of the National Response Plan, this division provides information on dollar amounts of past disaster assistance including Public Assistance, Individual Assistance, and Temporary Housing, as well as information on retrofitting and acquisition/relocation initiatives. The Response & Recovery Division also provides mobile emergency response support to disaster areas, supports the National Disaster Medical System, and provides urban search and rescue teams for disaster victims in confined spaces.

The division also coordinates federal disaster assistance programs. The Public Assistance Grant Program (PA) that provides 75% grants for mitigation projects to protect eligible damaged public and private non-profit facilities from future damage. "Minimization" grants at 100% are available through the Individuals and Family Grant Program. The Hazard Mitigation Grant Program and the Fire Management Assistance Grant Program are also administered by this division.

#### **Computer Sciences Corporation**

New England Regional Insurance Manager Bureau and Statistical Office (781) 848-1908

Corporate Headquarters 3170 Fairview Park Drive Falls Church, VA 22042 (703) 876-1000 http://www.csc.com/

A private company contracted by the Federal Insurance Administration as the National Flood Insurance Program Bureau and Statistical Agent, CSC provides information and assistance on flood insurance, including handling policy and claims questions, and providing workshops to leaders, insurance agents, and communities.

### **Small Business Administration**

Region I 10 Causeway Street, Suite 812 Boston, MA 02222-1093 (617) 565-8416 http://www.sba.gov/

SBA has the authority to "declare" disaster areas following disasters that affect a significant number of homes and businesses, but that would not need additional assistance through FEMA. (SBA is triggered by a FEMA declaration, however.) SBA can provide additional low-interest funds (up to 20% above what an eligible applicant would "normally" qualify for) to install mitigation measures. They can also loan the cost of bringing a damaged property up to state or local code requirements. These loans can be used in combination with the new "mitigation insurance" under the NFIP, or in lieu of that coverage.

## **Environmental Protection Agency**

Region I 1 Congress Street, Suite 1100 Boston, MA 02114-2023 (888) 372-7341

Provides grants for restoration and repair, and educational activities, including:

- ☐ Capitalization Grants for Clean Water State Revolving Funds: Low interest loans to governments to repair, replace, or relocate wastewater treatment plans damaged in floods. Does not apply to drinking water or other utilities.
- □ Clean Water Act Section 319 Grants: Cost-share grants to state agencies that can be used for funding watershed resource restoration activities, including wetlands and other aquatic habitat (riparian zones). Only those activities that control non-point pollution are eligible. Grants are administered through the CT DEEP.

## U.S. Department of Housing and Urban Development

20 Church Street, 19<sup>th</sup> Floor Hartford, CT 06103-3220 (860) 240-4800 http://www.hud.gov/

The U.S. Department of Housing and Urban Development offers *Community Development Block Grants (CDBG)* to communities with populations greater than 50,000, who may contact HUD directly regarding CDGB. One program objective is to improve housing conditions for low and moderate income families. Projects can include acquiring floodprone homes or protecting them from flood damage. Funding is a 100% grant; can be used as a source of local matching funds for other funding programs such as FEMA's "404" Hazard Mitigation Grant Program. Funds can also be applied toward "blighted" conditions, which is often the post-flood condition. A separate set of funds exists for conditions that create an "imminent threat." The funds have been used in the past to replace (and redesign) bridges where flood damage eliminates police and fire access to the other side of the waterway. Funds are also available for smaller municipalities through the state-administered CDBG program participated in by the State of Connecticut.

## **U.S. Army Corps of Engineers**

Institute for Water Resources 7701 Telegraph Road Alexandria, VA 22315 (703) 428-8015 http://www.iwr.usace.army.mil/

The Corps provides 100% funding for floodplain management planning and technical assistance to states and local governments under several flood control acts and the Floodplain Management Services Program (FPMS). Specific programs used by the Corps for mitigation are listed below.

- □ Section 205 Small Flood Damage Reduction Projects: This section of the 1948 Flood Control Act authorizes the Corps to study, design, and construct small flood control projects in partnership with non-Federal government agencies. Feasibility studies are 100 percent federally-funded up to \$100,000, with additional costs shared equally. Costs for preparation of plans and construction are funded 65 percent with a 35 percent non-federal match. In certain cases, the non-Federal share for construction could be as high as 50 percent. The maximum federal expenditure for any project is \$7 million.
- Section 14 Emergency Streambank and Shoreline Protection: This section of the 1946 Flood Control Act authorizes the Corps to construct emergency shoreline and streambank protection works to protect public facilities such as bridges, roads, public buildings, sewage treatment plants, water wells, and non-profit public facilities such as churches, hospitals, and schools. Cost sharing is similar to Section 205 projects above. The maximum federal expenditure for any project is \$1.5 million.
- □ Section 103 Hurricane and Storm Damage Reduction Projects: This section of the 1962 River and Harbor Act authorizes the Corps to study, design, and construct small coastal storm damage reduction projects in partnership with non-Federal government agencies. Beach nourishment (structural) and floodproofing (non-structural) are examples of storm damage reduction projects constructed under this authority. Cost sharing is similar to Section 205 projects above. The maximum federal expenditure for any project is \$5 million.
- □ Section 208 Clearing and Snagging Projects: This section of the 1954 Flood Control Act authorizes the Corps to perform channel clearing and excavation with limited embankment construction to reduce nuisance flood damages caused by debris and minor shoaling of rivers. Cost sharing is similar to Section 205 projects above. The maximum federal expenditure for any project is \$500,000.
- Section 206 Floodplain Management Services: This section of the 1960 Flood Control Act, as amended, authorizes the Corps to provide a full range of technical services and planning guidance necessary to support effective floodplain management. General technical assistance efforts include determining the following: site-specific data on obstructions to flood flows, flood formation, and timing; flood depths, stages, or floodwater velocities; the extent, duration, and frequency of flooding; information on natural and cultural floodplain resources; and flood loss potentials before and after the use of floodplain management measures. Types of studies conducted under FPMS

include floodplain delineation, dam failure, hurricane evacuation, flood warning, floodway, flood damage reduction, stormwater management, floodproofing, and inventories of floodprone structures. When funding is available, this work is 100 percent federally funded.

In addition, the Corps also provides emergency flood assistance (under Public Law 84-99) after local and state funding has been used. This assistance can be used for both flood response and post-flood response. Corps assistance is limited to the preservation of life and improved property; direct assistance to individual homeowners or businesses is not permitted. In addition, the Corps can loan or issue supplies and equipment once local sources are exhausted during emergencies.

## **U.S. Department of Commerce**

National Weather Service Northeast River Forecast Center 445 Myles Standish Blvd. Taunton, MA 02780 (508) 824-5116 http://www.nws.noaa.gov/

The National Weather Service prepares and issues flood, severe weather, and coastal storm warnings. Staff hydrologists can work with communities on flood warning issues and can give technical assistance in preparing flood warning plans.

#### **U.S. Department of the Interior**

National Park Service
Steve Golden, Program Leader
Rivers, Trails, & Conservation Assistance
15 State Street
Boston, MA 02109
(617) 223-5123
http://www.nps.gov/rtca/

The National Park Service provides technical assistance to community groups and local, state, and federal government agencies to conserve rivers, preserve open space, and develop trails and greenways as well as identify nonstructural options for floodplain development.

### U.S. Fish and Wildlife Service

New England Field Office 70 Commercial Street, Suite 300 Concord, NH 03301-5087 (603) 223-2541 http://www.fws.gov/

The U.S. Fish and Wildlife Service provides technical and financial assistance to restore wetlands and riparian habitats through the North American Wetland Conservation Fund and Partners for Wildlife programs. It also administers the *North American Wetlands Conservation Act Grants Program*, which provides matching grants to organizations and individuals who have developed partnerships to carry out wetlands projects in the United

States, Canada, and Mexico. Funds are available for projects focusing on protecting, restoring, and/or enhancing critical habitat.

## **U.S. Department of Agriculture**

Natural Resources Conservation Service Connecticut Office 344 Merrow Road, Suite A Tolland, CT 06084-3917 (860) 871-4011

The Natural Resources Conservation Service provides technical assistance to individual landowners, groups of landowners, communities, and soil and water conservation districts on land use and conservation planning, resource development, stormwater management, flood prevention, erosion control and sediment reduction, detailed soil surveys, watershed/river basin planning and recreation, and fish and wildlife management. Financial assistance is available to reduce flood damage in small watersheds and to improve water quality. Financial assistance is available under the Emergency Watershed Protection Program, the Cooperative River Basin Program, and the Small Watershed Protection Program.

#### Regional Resources

### **Northeast States Emergency Consortium**

1 West Water Street, Suite 205 Wakefield, MA 01880 (781) 224-9876 http://www.serve.com/NESEC/

The Northeast States Emergency Consortium (NESEC) develops, promotes, and coordinates "all-hazards" emergency management activities throughout the northeast. NESEC works in partnership with public and private organizations to reduce losses of life and property. They provide support in areas including interstate coordination and public awareness and education, along with reinforcing interactions between all levels of government, academia, nonprofit organizations, and the private sector.

#### State Resources

## Connecticut Department of Administrative Services, Division of Construction Services

165 Capitol Avenue Hartford, CT 06106 (860) 713-5850 http://www.ct.gov/dcs/site/default.asp

Office of the State Building Inspector - The Office of the State Building Inspector is responsible for administering and enforcing the Connecticut State Building Code and is also responsible for the municipal Building Inspector Training Program.

## **Connecticut Department of Economic and Community Development**

505 Hudson Street Hartford, CT 06106-7106 (860) 270-8000 http://www.ct.gov/ecd/

The Connecticut Department of Economic and Community Development administers HUD's State CDBG Program, awarding smaller communities and rural areas grants for use in revitalizing neighborhoods, expanding affordable housing and economic opportunities, and improving community facilities and services.

## **Connecticut Department of Energy and Environmental Protection**

79 Elm Street Hartford, CT 06106-5127 (860) 424-3000 http://www.dep.state.ct.us/

The Department includes several divisions with various functions related to hazard mitigation:

Bureau of Water Management, Inland Water Resources Division - This division is generally responsible for flood hazard mitigation in Connecticut, including administration of the National Flood Insurance Program. Other programs within the division include:

	National Flood Insurance Program State Coordinator: Provides flood insurance and floodplain management technical assistance, floodplain management ordinance review, substantial damage/improvement requirements, community assistance visits, and other general flood hazard mitigation planning including the delineation of floodways.
<b>-</b>	Flood & Erosion Control Board Program: Provides assistance to municipalities to solve flooding, beach erosion, and dam repair problems. Have the power to construct and repair flood and erosion management systems. Certain nonstructural measures that mitigate flood damages are also eligible. Funding is provided to communities that apply for assistance through a Flood & Erosion Control Board on a noncompetitive basis.
	Inland Wetlands and Watercourses Management Program: Provides training, technical, and planning assistance to local Inland Wetlands Commissions, reviews and approves municipal regulations for localities. Also controls flood management and natural disastermitigations.
	Dam Safety Program: Charged with the responsibility for administration and enforcement of Connecticut's dam safety laws. Regulates the operation and maintenance of dams in the state. Permits the construction, repair or alteration of dams, dikes or similar structures and maintains a registration database of all known dams statewide. This program also operates a statewide inspection program.

Planning and Standards Division - Administers the Clean Water Fund and many other programs directly and indirectly related to hazard mitigation including the Section 319 nonpoint source pollution reduction grants and municipal facilities program which deals with mitigating pollution from wastewater treatment plants.

Office of Long Island Sound Programs (OLISP) - Administers the Coastal Area Management Act (CAM) program and Long Island Sound License Plate Program.

## **Connecticut Department of Emergency Services and Public Protection**

1111 Country Club Road Middletown, CT 06457 (860) 685-8190 http://www.ct.gov/dps/

## Connecticut Division of Emergency Management and Homeland Security

25 Sigourney Street, 6<sup>th</sup> Floor Hartford, CT 06106-5042 (860) 256-0800 http://www.ct.gov/demhs/

DEMHS is the lead division responsible for emergency management. Specifically, responsibilities include emergency preparedness, response and recovery, mitigation, and an extensive training program. DEMHS is the state point of contact for most FEMA grant and assistance programs and oversees hazard mitigation planning and policy; administration of the Hazard Mitigation Grant Program, Flood Mitigation Assistance Program, and Pre-Disaster Mitigation Program; and the responsibility for making certain that the State Natural Hazard Mitigation Plan is updated every five years. DEMHS administers the Earthquake and Hurricane programs described above under the FEMA resource section. Additionally, DEMHS operates a mitigation program to coordinate mitigation throughout the state with other government agencies. Additionally, the agency is available to provide technical assistance to sub-applicants during the planning process.

DEMHS operates and maintains the CT "Alert" emergency notification system powered by Everbridge. This system uses the state's Enhanced 911 database for location-based notifications to the public for life-threatening emergencies. The database includes traditional wire-line telephone numbers and residents have the option to register other numbers on-line in addition to the land line.

DEMHS employs the *State Hazard Mitigation Officer*, who is in charge of hazard mitigation planning and policy; oversight of administration of the Hazard Mitigation Grant Program, Flood Mitigation Assistance Program, and Pre-Disaster Mitigation Program, and has the responsibility of making certain that the State Natural Hazard Mitigation Plan is updated every five years.

## **Connecticut Department of Transportation**

2800 Berlin Turnpike Newington, CT 06131-7546 (860) 594-2000 http://www.ct.gov/dot/

The Department of Transportation administers the federal Intermodal Surface Transportation Efficiency Act (ISTEA) that includes grants for projects that promote alternative or improved methods of transportation. Funding through grants can often be used for projects with mitigation benefits such as preservation of open space in the form of bicycling and walking

trails. CT DOT is also involved in traffic improvements and bridge repairs that could be mitigation related.

## **Connecticut Office of Policy and Management**

450 Capitol Avenue Hartford, CT 06106 (860) 418-6200 http://www.ct.gov.opm

Small Town Economic Assistance Program

The Small Town Economic Assistance Program (STEAP) funds economic development, community conservation and quality of life projects for localities that are ineligible to receive Urban Action bonds. This program is administered by the Connecticut Office of Policy and Management (OPM). Connecticut municipalities may receive up to \$500,000 per year if (1) they are not designated as a distressed municipality or a public investment community, and (2) the State Plan of Conservation and Development does not show them as having a regional center. Public Act 05-194 allows an Urban Act Town that is not designated as a regional center under the State Plan of Conservation and Development to opt out of the Urban Action program and become a STEAP town for a period of four years. Projects eligible for STEAP funds include:

- 1) economic development projects such as (a) constructing or rehabilitating commercial, industrial, or mixed-use structures and (b) constructing, reconstructing, or repairing roads, access ways, and other site improvements;
- 2) recreation and solid waste disposal projects;
- 3) social service-related projects, including day care centers, elderly centers, domestic violence and emergency homeless shelters, multi-purpose human resource centers, and food distribution facilities;
- 4) housing projects;
- 5) pilot historic preservation and redevelopment programs that leverage private funds; and 6) other kinds of development projects involving economic and community development, transportation, environmental protection, public safety, children and families and social service programs.

In recent years, STEAP grants have been used to help fund many types of projects that are consistent with the goals of hazard mitigation. Projects funded in 2013 and 2014 include streambank stabilization, dam removal, construction of several emergency operations centers (EOCs) in the state, conversion of a building to a shelter, public works garage construction and renovations, design and construct a public safety communication system, culvert replacements, drainage improvements, bridge replacements, generators, and open space acquisition.

#### Private and Other Resources

**Association of State Dam Safety Officials (ASDSO)** 

450 Old Vine Street Lexington, KY 40507 (859) 257-5140 http://www.damsafety.org ASDSO is a non-profit organization of state and federal dam safety regulators, dam owners/operators, dam designers, manufacturers/suppliers, academia, contractors and others interested in dam safety. The mission is to advance and improve the safety of dams by supporting the dam safety community and state dam safety programs, raising awareness, facilitating cooperation, providing a forum for the exchange of information, representing dam safety interests before governments, providing outreach programs, and creating an unified community of dam safety advocates.

## The Association of State Floodplain Managers (ASFPM)

2809 Fish Hatchery Road, Suite 204 Madison, WI 53713 (608) 274-0123 http://www.floods.org/

ASFPM is a professional association of state employees that assist communities with the NFIP with a membership of over 1,000. ASFMP has developed a series of technical and topical research papers and a series of Proceedings from their annual conferences. Many "mitigation success stories" have been documented through these resources and provide a good starting point for planning.

## **Connecticut Association of Flood Managers (CAFM)**

P.O. Box 960 Cheshire, CT 06410 ContactCAFM@gmail.com

CAFM is a professional association of private consultants and local floodplain managers that provides training and outreach regarding flood management techniques. CAFM is the local state chapter of ASFPM.

#### **Institute for Business & Home Safety**

4775 East Fowler Avenue Tampa, FL 33617 (813) 286-3400 http://www.ibhs.org/

A nonprofit organization put together by the insurance industry to research ways of reducing the social and economic impacts of natural hazards. The Institute advocates the development and implementation of building codes and standards nationwide and may be a good source of model code language.

#### Multidisciplinary Center for Earthquake Engineering and Research (MCEER)

University at Buffalo State University of New York Red Jacket Quadrangle Buffalo, New York 14261 (716) 645-3391 http://mceer.buffalo.edu/ A source for earthquake statistics, research, and for engineering and planning advice.

#### The National Association of Flood & Stormwater Management Agencies (NAFSMA)

1301 K Street, NW, Suite 800 East Washington, DC 20005 (202) 218-4122 http://www.nafsma.org

NAFSMA is an organization of public agencies who strive to protect lives, property, and economic activity from the adverse impacts of stormwater by advocating public policy, encouraging technology, and conducting educational programs. NAFSMA is a voice in national politics on water resources management issues concerning stormwater management, disaster assistance, flood insurance, and federal flood management policy.

#### **National Emergency Management Association (NEMA)**

P.O. Box 11910 Lexington, KY 40578 (859)-244-8000 http://www.nemaweb.org/

A national association of state emergency management directors and other emergency management officials, the NEMA Mitigation Committee is a strong voice to FEMA in shaping all-hazard mitigation policy in the nation. NEMA is also an excellent source of technical assistance.

#### **Natural Hazards Center**

University of Colorado at Boulder 482 UCB Boulder, CO 80309-0482 (303) 492-6818 http://www.colorado.edu/hazards/

The Natural Hazards Center includes the Floodplain Management Resource Center, a free library and referral service of the ASFPM for floodplain management publications. The Natural Hazards Center is located at the University of Colorado in Boulder. Staff can use keywords to identify useful publications from the more than 900 documents in the library.

Volunteer Organizations - Volunteer organizations including the American Red Cross, the Salvation Army, Habitat for Humanity, and the Mennonite Disaster Service are often available to help after disasters. Service Organizations such as the Lions Club, Elks Club, and the Veterans of Foreign Wars are also available. Habitat for Humanity and the Mennonite Disaster Service provide skilled labor to help rebuild damaged buildings while incorporating mitigation or floodproofing concepts. The office of individual organizations can be contacted directly or the FEMA Regional Office may be able to assist.

Flood Relief Funds - After a disaster, local businesses, residents, and out-of-town groups often donate money to local relief funds. They may be managed by the local government, one or more local churches, or an ad hoc committee. No government disaster declaration is needed. Local officials should recommend that the funds be held until an applicant exhausts all sources

of public disaster assistance, allowing the funds to be used for mitigation and other projects that cannot be funded elsewhere.

Americorps - Americorps is the National Community Service Organization. It is a network of local, state, and national service programs that connects volunteers with nonprofits, public agencies, and faith-based and community organizations to help meet our country's critical needs in education, public safety, health, and the environment. Through their service and the volunteers they mobilize, AmeriCorps members address critical needs in communities throughout America, including helping communities respond to disasters. Some states have trained Americorps members to help during flood-fight situations such as by filling and placing sandbags.

#### 12.0 REFERENCES

Association of State Dam Safety Officials, 2010, "Dam Failures, Dam Incidents (Near Failures)," http://www.damsafety.org/media/Documents/PRESS/US_FailuresIncidents.pdf
, 2014, Connecticut Dam Safety Program, http://www.damsafety.org/map/state.aspx?s=7
Blake, E. S., Jarrell, J. D., Rappaport, E. N., Landsea, C. W., 2006, <i>The Deadliest, Costliest, and Most Intense United States Tropical Cyclones from 1851 to 2005 (and Other Frequently Requested Hurricand Facts)</i> , Miami, FL: NOAA Technical Memorandum NWS TPC-4, http://www.nhc.noaa.gov/Deadliest_Costliest.shtml
Brumbach, Joseph J., 1965, <i>The Climate of Connecticut</i> , State Geological and Natural History Survey of Connecticut, Bulletin No. 99
Buck, Rinker, 2010, "Earthquake Reported off Long Island Sound", <i>Hartford Courant</i> , http://articles.courant.com/2010-11-30/news/hc-earthquake-1201-20101130_1_small-quake-minor-earthquake-minor-temblor
Connecticut Department of Economic and Community Development, 2011, "Construction Reports: Housing Production and Permits" 2000 – 20012, http://www.ct.gov/ecd/cwp/view.asp?a=1105&q=251248,
Connecticut Department of Energy & Environmental Protection, 2014, Connecticut's Natural Hazard Mitigation Plan Update
, 2007, <i>High Hazard &amp; Significant Hazard Dams in Connecticut, rev. 9/11/07</i> . http://www.ct.gov/dep/lib/dep/water_inland/dams/high_significant_hazard_dams.pdf
, GIS Data for Connecticut - DEP Bulletin Number 40, rev. 2013
Connecticut Department of Public Health, 2010, Connecticut Emergency Medical Service Regional Councils, http://www.ct.gov/dph/cwp/view.asp?a=3127&Q=387372&dphNav_GID=1827&dphNav= ,
Connecticut Flood Recovery Committee, 1955, Report of the Connecticut Flood Recovery Committee, November 3, 1955, Connecticut State Library, http://www.cslib.org/floodrecov.pdf
Connecticut Geological & Natural History Survey, 1990, Generalized Bedrock Geologic Map of Connecticut, Department of Environmental Protection, http://www.wesleyan.edu/ctgeology/images/CtGeoMap_big.jpg,
Connecticut State Data Center, 2014, Connecticut Census Data, http://ctsdc.uconn.edu/connecticut_census_data.html
, 2013, Hazard Mitigation Assistance Unified Guidance, http://www.fema.gov/library/viewRecord.do?id=4225
, 2010, "Connecticut Disaster History," http://www.fema.gov/news/disasters_state.fema?id=9

, 2010, "Wind Zones in the United States," http://www.fema.gov/plan/prevent/saferoom/tsfs02_wind_zones.shtm
, 2012, "FEMA BCA Toolkit v.4.8."
, April 2008, HAZUS®-MH Estimated Annualized Earthquake Losses for the United States, FEMA document 366
, 2007, "Connecticut Receives More Than \$6.4 Million in Federal Disaster Aid," http://www.fema.gov/news/newsrelease.fema?id=38763
, 2008, Multi-Hazard Mitigation Planning Guidance Under the Disaster Mitigation Act of 2000, March 2004, Revised November 2006, June 2007 and January 2008.
, 2007, <i>Using Benefit-Cost Review in Mitigation Planning</i> , State and Local Mitigation Planning How-To Guide Number Five, FEMA document 386-5
, 2005, Reducing Damage from Localized Flooding: A Guide for Communities, FEMA document 511
, 2003, Developing the Mitigation Plan – Identifying Mitigation Actions and Implementation Strategies, State and Local Mitigation Planning How-To Guide Number Three, FEMA document 386-3
, 1987, Reducing Losses in High Risk Flood Hazard Areas: A Guidebook for Local Officials, The Association of State Floodplain Managers
, Hazards, Tornadoes, http://www.fema.gov/hazard/tornado/index.shtm
, Multi-Hazard Loss Estimation Methodology – Earthquake Model: Hazus-MH MR5 Technical Manual
, Multi-Hazard Loss Estimation Methodology – Flood Model: Hazus-MH MR5 Technical Manual
, Multi-Hazard Loss Estimation Methodology – Hurricane Model: Hazus-MH MR5 Technical Manual
Flounders, Helene T., 2004, <i>Connecticut Statewide Forest Resource Plan</i> , 2004 – 2013, Connecticut Department of Environmental Protection
Fox News.com, 2008, Rare Earthquake Strikes Connecticut, <a href="http://www.foxnews.com/story/0,2933,336973,00.html">http://www.foxnews.com/story/0,2933,336973,00.html</a>
Glowacki, D. 2005. <i>Heavy Rains &amp; Flooding of Sub-Regional Drainage Basins</i> , reviewed draft, Connecticut Department of Environmental Protection, Inland Water Resources Division
Hershfield, David M., 1961, <i>Rainfall Frequency Atlas of the United States</i> , Technical Paper No. 40, U. S. Department of Commerce, Weather Bureau

Kafka, Alan L., 2008, *Why Does the Earth Quake in New England?* Boston College, Weston Observatory, Department of Geology and Geophysics, http://www2.bc.edu/~kafka/Why\_Quakes/why\_quakes.html,

Kennard, D., 2008, "Fuel Categories", Forest Encyclopedia Network, http://www.forestencyclopedia.net/p/p4/p140/p353/p506

Map and Geographic Information Center, 2014, "Connecticut GIS Data," University of Connecticut, Storrs, Connecticut, http://magic.lib.uconn.edu/connecticut\_data.html

Miller, D.R., G.S. Warner, F.L. Ogden, A.T. DeGaetano, 1997, *Precipitation in Connecticut*, University of Connecticut College of Agriculture and Natural Resources., Connecticut Institute of Water Resources, Storrs, CT

Muckel, G.B. (editor)., 2004, Understanding Soil Risks and Hazards: <u>Using Soil Survey to Identify Areas with Risks and Hazards to Human Life and Property</u>, United States Department of Agriculture, Natural Resource Conservation Service, National Soil Survey Center, Lincoln, NE

National Interagency Fire Center, 2012, *Fire Information – Wildland Fire Statistics*, http://www.nifc.gov/fire\_info/fire\_stats.htm

National Oceanic and Atmospheric Administration, Coastal Services Center, 2014, "Hurricane Historical Tracks," http://csc.noaa.gov/hurricanes/ , National Climatic Data Center, 2011, "Station Snow Climatology – North Canaan, Connecticut," http://www.ncdc.noaa.gov/ussc/USSCAppController#GEN , National Hurricane Center, 2011, "Return Periods," http://www.nhc.noaa.gov/HAW2/english/basics/return.shtml National Oceanic and Atmospheric Administration (NOAA), Enhanced F-scale for Tornado Damage, http://www.spc.noaa.gov/efscale/ \_\_\_\_\_, Severe Weather, http://www.noaawatch.gov/themes/severe.php , National Severe Storms Laboratory, 2009, "Tornado Basics," http://www.nssl.noaa.gov/primer/tornado/tor basics.html , 2008, "Lightning Basics," http://www.nssl.noaa.gov/primer/lightning/ltg\_basics.html \_\_\_\_\_, 2006, "Damaging Winds Basics," http://www.nssl.noaa.gov/primer/wind/wind\_basics.html , 2006, "Hail Basics," http://www.nssl.noaa.gov/primer/hail/hail basics.html \_\_\_\_\_, 2004, "Climatography of the United States, No. 20, 1981-2010: http://gis.ncdc.noaa.gov/map/viewer/#app=cdo&cfg=cdo&theme=normals&layers=01&node=gis&extent =-149.3:20.2:-60.1:69.6&custom=normals , 2001, Winter Storms: The Deceptive Killers – A Preparedness Guide,

http://www.nws.noaa.gov/om/winter/resources/winterstorm.pdf

, 1995, A Preparedness Guide
, Weekend Snowstorm in Northeast Corridor Classified as a Category 3 "Major" Storm, http://www.noaanews.noaa.gov/stories2006/s2580.htm
, National Climatic Data Center (NCDC), 2011, Extreme Weather and Climate Events, http://www.ncdc.noaa.gov/oa/climate/severeweather/extremes.html
, National Weather Service, Office of Climate, Water, and Weather Services, 2010, NEW Weather Fatality, Injury, and Damage Statistics, http://www.nws.noaa.gov/om/hazstats.shtml
, National Weather Service Columbia, SC Forecast Office, 2010, <i>Downbursts</i> , http://www.erh.noaa.gov/cae/svrwx/downburst.htm
, 2010, Hail, http://www.erh.noaa.gov/er/cae/svrwx/hail.htm
, National Weather Service Louisville, KY Weather Forecast Office, 2005, <i>Tornado Classifications</i> , http://www.crh.noaa.gov/lmk/preparedness/tornado_small/classify.php
New England Seismic Network, 2011, "NESN Recent Earthquakes," Weston Observatory – Boston College, http://aki.bc.edu/cgi-bin/NESN/recent_events.pl
Northeast States Emergency Consortium, Earthquakes, http://www.nesec.org/hazards/Earthquakes.cfm
Robinson, G. R. Jr., Kapo, K. E., 2003. <i>Generalized Lithology and Lithogeochemical Character of Near Surface Bedrock in the New England Region</i> , U.S. Geological Survey Open-File Report 03-225, U.S. Geological Survey, Reston, VA, http://pubs.usgs.gov/of/2003/of03-225/
Rodriguez, Orlando, 2007, "North Canaan, CT Population Projection from 2010 to 2030 by Age, Ethnitown and Sex Distributions," Connecticut State Data Center, University of Connecticut, Storrs, Connecticut, http://ctsdc.uconn.edu/Projections-Towns/CT_North Canaan_2000to2030_PopProjections.xls
Soil Survey Staff, Natural Resources Conservation Service, United States Department of Agriculture, Soil Series Classification Database [Online WWW], Available URL: http://soils.usda.gov/soils/technical/classification/scfile/index.html. USDA-NRCS, Lincoln, NE
Tornado Project Online. http://www.tornadoproject.com/
Town of North Canaan Connecticut, 2014, http://northcanaan.org/
, 2005, Town of North Canaan Subdivision Regulations
, 2006, Town of North Canaan Plan of Conservation & Development
, 2009, Town of North Canaan Zoning Regulations
, 2005, Inland Wetlands and Watercourses Regulations

, 1979-1980, National Program for Inspection of Non-Federal Dams, Phase I Inspection Reports, http://oai.dtic.mil/oai/
United States Census Bureau, 2014, 2010 Census Data, http://www.census.gov/
, American Factfinder, http://factfinder.census.gov/
United States Geological Survey, USGS Water Data for Connecticut, http://nwis.waterdata.usgs.gov/ct/nwis/nwis
United States Geological Survey, Earthquake Hazards Program, Connecticut <i>Earthquake History</i> , Abridged from Earthquake Information Bulletin, January – February 1971, http://earthquake.usgs.gov/regional/states/connecticut/history.php.
, 2010, "2009 Earthquake Probability Mapping," https://geohazards.usgs.gov/eqprob/2009/index.php
, 2010, "Magnitude / Intensity Comparison," http://earthquake.usgs.gov/learn/topics/mag_vs_int.php
, 2009, Seismic <i>Hazard Map of Connecticut</i> , http://earthquake.usgs.gov/regional/states/connecticut/hazards.php.
, 2009, The Severity of an Earthquake, http://pubs.usgs.gov/gip/earthq4/severitygip.html
, 2009, "Top Earthquake States," http://earthquake.usgs.gov/earthquakes/states/top_states.php
, 2006, Wildfire Hazards – A National Threat, http://pubs.usgs.gov/fs/2006/3015/2006-3015.pdf
Wfsb, 2010, "Residents Report Feeling Canadian Earthquake," http://www.wfsb.com/news/24007970/detail.html
Wikipedia, 2011, "1993 Storm of the Century," http://en.wikipedia.org/wiki/1993_Storm_of_the_Century
, 2014, "North Canaan, Connecticut," http://en.wikipedia.org/wiki/North Canaan,_Connecticut
, 2011, "Northeastern United States Blizzard of 1978," http://en.wikipedia.org/wiki/Northeastern_United_States_blizzard_of_1978
, 2010, "Fire Triangle," http://en.wikipedia.org/wiki/Fire_triangle
, 2014, List of Connecticut Tornadoes, http://en.wikipedia.org/wiki/List_of_Connecticut_tornadoes

	_
APPENDIX A STAPLEE MATRIX	

	Report Sections	Category			Cost					Weigh	ted S	TAPL	EE Crite	ria <sup>4</sup>			a
	S	1. Prevention			Cost				Benefits					Costs			Score
Strategies and Actions for the Town of North Canaan	Flooding Hurricanes and Tropical Storms Summer Storms and Tornadoes Winter Storms Earthquakes Dam Failure	2. Property Protection 3. Natural Resource Prot. 4. Structural Projects 5. Public Information 6. Emergency Services	Responsible Department <sup>1</sup>	Timeframe	Low = Minimal <sup>2</sup> Intermediate = <\$100,000 High = >\$100,000	Potential Funding Sources <sup>3</sup>	Social Technical (x2)	Administrative	Political Legal	Economic (x2)	STAPLEE Subtotal	Social	Technical (x2) Administrative	Political Legal	Economic (x2)	Environmental STAPLEE Subtotal	Total STAPLEE So
ALL HAZARDS  Utilize the existing Alert Now/Blackboard Connect notification system to its fullest capabilities and encourage additional residents																	
1 to subscribe	x x x x x x	х 6	EMD	1/2015-12/2015	Low	Municipal	1 0	0	0 0	0 0	1.0	0	0 0	0 0	0	0 0.0	1.0
2 Encourage residents to purchase and use NOAA weather radios with alarm features	x x x x X x		EMD	1/2016-12/2016	Low	Municipal	1 0	0	0 0		1.0		0 0	0 0		0.0	
3 Review and update the Town EOP at least once annually  FLOODING - Prevention	x x x x x x	х 6	EMD	1/2015-12/2015	Low	Municipal	1 0	0	0 0	0 0	) 1.0	0	0 0	0 0	0	0 0.0	1.0
4 Consider requiring at least one foot of freeboard to the Floodplain Management Regulations.		1	P&Z	1/2016-12/2016	Low	Municipal	1 0.5	0.5	0 0	0.5 0.	.5 4.0	0	0 -0.5	0 0	0	0 -0.5	3.5
Require developers to demonstrate whether detention or retention of stormwater is the best option for reducing peak flows																	
5 downstream of a project and provide a design for the appropriate alternative.	x x x x	2	P&Z	1/2017-12/2017	Low	Municipal	1 0.5	0	0 0	0 0.	.5 2.5	0	0 -0.5	0 0	0	0 -0.5	2.0
FLOODING - Property Protection																	
6 Encourage property owners to purchase flood insurance under the NFIP and to report claims when flooding damage occurs.	x x x x	2	Building	1/2016-12/2016	Low	Municipal	1 0	0	0 0	0 0	1.0		0 0	0 0	0	0 0.0	
7 Consider conducting a Camp Brook watershed study to identify appropriate methods of reducing flood risks.	x x x x	2	PW Fine Color	1/2016-12/2016	High	Municipal	1 1	0.5			5.5		0 -0.5	0 0		0 -1.5	
8 Consider elevations or acquisitions of homes along Camp Brook that are prone to flooding  Evaluate properties with flood risk such as the North Canaan Firehouse to determine potential flood damage reduction methods	X X X X	2	PW, First Selectman	1/2017-12/2017	High	НМА	1 1	0.5	0 0	0.5 1	5.5	0	0 -0.5	0 0	-0.5	0 -1.5	4.0
9 (see also #22 below)	x x x x	2	PW	1/2017-12/2017	Intermediate	Municipal, EOC, STEAP	1 1	0.5	0 0	0.5 0.	.5 <b>5.0</b>	0	0 -0.5	0 0	-0.5	0 -1.5	3.5
FLOODING - Public Education																	
10 Ensure that the appropriate municipal personnel are trained in flood damage prevention methods.  Compile a checklist that cross-references the bylaws, regulations, and codes related to flood damage prevention that may be	X X X X	1	P&Z, Building	1/2015-12/2015	Low	Municipal, EMI, CAFM	1 1	0	0 0	0 0.	.5 3.5	0	0 -0.5	0 0	0	0 -0.5	3.0
applicable to a proposed project and make this list available to potential applicants. The information in Section 3.4 provides a																	
11 starting point for this list.	x x x x	1,5	P&Z	1/2016-12/2016	Low	Municipal	1 0.5	0	0 0	0 0.	.5 <b>2.5</b>	0	0 0	0 0	0	0 0.0	2.5
Provide outreach regarding home elevation and relocation, flood barriers, dry floodproofing, wet floodproofing, and other home 12 improvement techniques (Section 3.6.2) to private homeowners and businesses with flooding problems.	x x x x	1,5	Building Official	1/2015-12/2015	Low	Municipal	1 0.5	0	0 0	0 0.	.5 2.5	0	0 -0.5	-0.5 0	0	0 -1.0	1.5
13 Provide outreach regarding which types of mitigation options are appropriate for reducing flood insurance premiums  FLOODING - Natural Resource Protection	X X X X	2,5	Building Official	1/2016-12/2016	Low	Municipal	1 0.5	0	0 0	0 0	2.0	0	0 -0.5	0 0	0	0 -0.5	1.5
Pursue the acquisition of additional municipal open space inside SFHAs and set it aside as greenways, parks, or other																	1
14 nonresidential, noncommercial, or nonindustrial use.	x x x x	3	First Selectman	1/2018-12/2019	High	HMA, private funds	1 1	0.5	0 0	0 1	4.5	0	0 0	0 0	-1	0 -2.0	2.5
Selectively pursue conservation recommendations listed in the Plan of Conservation and Development and other studies and 15 documents	x x x x	3	First Selectman	1/2018-12/2019	Intermediate	HMA, private funds	1 0.5	0	1 0		4.0	0	0 1		1 1	0 -3.0	1.0
FLOODING - Structural Projects	X	J	That Selection	1/2018-12/2019	intermediate	TilviA, private ranas	1 0.3	0	1 0		7.0	U	0 -1	0 0	-1	0 -3.0	1.0
16 Review culvert conveyances based on existing hydrology and Northeast Regional Climate Center guidance.	x x x x	1	PW	7/2015-6/2016	Low	Municipal	1 1	0	0 0	0 1	4.0	0	0 0	0 0	0	0.0	4.0
When replacing or upgrading culverts, work with CT DOT to incorporate findings of the climate change pilot study and work with 17 HVA to incorporate findings of the stream crossing assessment training.	x x x x	1	PW	7/2016-6/2017	Low	HMA, STEAP		0	0 0		4.0	0	0 0		-0.5	0 -1.0	3.0
18 Evaluate drainage problems in the town and develop a list of culverts to replace and increase capacities.	x x x x x	1,4	PW	7/2016-6/2017	Intermediate	STEAP, Municipal	1 1	1	0.5 0	0.5 1	6.5	0	0 -0.5	0 0	0.0	0 -1.5	_
19 Work with the State to replace and increase the capacity of the Camp Brook culvert.	x x x x	2,4	PW	7/2018-6/2019	Intermediate	State,HMA			1 0		6.5		0 -0.5				
20 Replace and increase the capacity of the Route 44 culvert at Church Street  FLOODING - Emergency Services	X X X X	4	PW	7/2018-6/2019	High	HMA*	1 1	1	0.5 0	0.5 1	6.5	0	0 -0.5	0 0	-1	0 -2.5	4.0
21 Ensure adequate barricades are available to block flooded streets in floodprone areas	x x x x	6	PW	1/2016-12/2016	Low	Municipal	1 0.5	0	0 0	0 0	2.0	0	0 -0.5	0 0	0	0 -0.5	1.5
Evaluate flood risks in the vicinity of the North Canaan Fire House. Potential mitigation actions may include constructing a berm or						'											
floodwall, floodproofing the building or relocating facilities on the site.	x x x x	6	EMD, PW	1/2017-12/2017	Intermediate	Municipal	1 1	0	0 0	0.5 0.	.5 4.5	0	0 -0.5	0 0	-1	0 -2.5	2.0
WIND DAMAGE RELATED TO HURRICANES, SUMMER STORMS, AND WINTER STORMS																	
Develop a town wide tree limb inspection and maintenance program to ensure that the potential for downed power lines is diminished. Continue to encourage property owners to trim branches located over structures and power lines.	x x x	2	PW	1/2016-12/2016	Low	Municipal	1 0.5							0 0			
24 The Building Department should provide literature regarding appropriate design standards for wind.  Encourage the use of structural techniques related to mitigation of wind damage in new residential and commercial structures to	x x x	5	Building Official	1/2016-12/2016	Low	Municipal	1 0.5	0	0 0	0 0	2.0	0	0 0	0 0	0	0 0.0	2.0
protect new buildings to a standard greater than the minimum building code requirements. Require such improvements for new															'		
25 municipal critical facilities.	x x x	1,2	PW, Building	1/2016-12/2017	Low	Municipal	1 0.5	0	0 0	0 0	2.0	0	0 0	0 0	-1	0 -2.0	0.0
WINTER STORMS															4	$\Box$	
Develop a plan to prioritize snow removal from the roof of critical facilities and other municipal buildings each winter. Ensure 26 adequate funding is available in the Town budget for this purpose.	x	1	PW	1/2015-12/2015	Low	Municipal	1 1	0	0 0	0 0	3.0	0	0 -0.5	0 0	-0.5	0 -1.5	1.5
Emergency personnel should continue to identify areas that are difficult to access during winter storm events and devise	^	-	1 **	1,2013 12,2013	LOW	iviumcipal	1		0		, 3.0		5 -0.5	1 0	-0.5	-1.3	1.0
27 contingency plans to access such areas during emergencies	х	6	EMD, PW	1/2016-12/2016	Low	Municipal, EOC	1 1	0	0 0	,	3.0		0 0	0 0			2.0
28 The town should consider utilizing snow fencing in areas prone to snow drift.  The Building Department should provide literature regarding appropriate design standards for mitigating icing, insulating pipes,	X	1	PW	1/2018-12/2018	Intermediate	Municipal	1 0.5	0	0 0	0.5	3.0	0	0 -0.5	0 0	-0.5	0 -1.5	1.5
29 and retrofits for flat-roofed buildings such as heating coils.	х	1	Building Official	1/2016-12/2016	Low	Municipal	1 0.5	0	0 0	0.5	3.0	0	0 0	0 0	0	0 0.0	3.0
end recommend the most recommendation and recommendation of the commendation of the co	^	<u> </u>	Danaing Official	1/2010 12/2010	2000	wancipai	1 0.5	0	0 0	0.5	. 3.0		J 0	1010	+-	0.0	5.0

	Report Sections	Category			Cost					W	Veig	hted S	TAPL	EE Crit	teria <sup>4</sup>	ļ			a
	ns es	್ತು ೫ 1. Prevention			Cost		Benefits							Costs					
Strategies and Actions for the Town of North Canaan	ording urricanes and Tropical mmer Storms and Tor inter Storms rthquakes im Failure iidfires	2. Property Protection 3. Natural Resource Prot. 4. Structural Projects 5. Public Information 6. Emergency Services	Responsible Department <sup>1</sup>	Timeframe	Low = Minimal <sup>2</sup> Intermediate =  <\$100,000  High = >\$100,000	Potential Funding Sources <sup>3</sup>	Social	Technical (x2)	Political	Legal	Economic (x2)	Environmental STAPLEE Subtotal	Social	Technical (x2) Administrative	Political	Legal	Economic (x2)	Environmental STAPLEE Subtotal	Total STAPLEE Scor
EARTHQUAKES																			
30 Consider preventing residential development in areas prone to collapse	x	1	P&Z	1/2016-12/2016	Low	Municipal, EOC	1	0.5	0	0	0	0 2.0	0	0 0	0	0	0	0.0	2.0
31 Ensure that municipal departments have adequate backup facilities in case earthquake damage occurs to municipal buildings.	x	2	PW, EMD	1/2017-12/2018	Intermediate	Municipal, EOC, STEAP	1	1 0	0	0	0	0 3.0	0	0 0	0	0	-0.5	0 -1.0	0 2.0
Consider bracing vulnerable systems and assets inside critical facilities. This could help protect IT systems, important records and																			
32 files.	x	2,6	PW, EMD	1/2017-12/2018	High	Municipal, EOC, STEAP	1	0.5	0	0	0	0 2.0	0	0 0	0	0	-0.5	0 -1.0	0 1.0
DAM FAILURE									0										
33 Include dam failure innundation areas in the Alert Now emergency contact database	х	6	EMD	1/2016-12/2016	Low	Municipal	1	0.5	0	0	0	0 2.0	0	0 0	0	0	0	0.0	2.0
34 Provide technical assistance referrals to private dam owners regarding effective maintenance strategies	х	6	PW	1/2017-12/2017	Low	Municipal	1	0 0	0	0	0	0 1.0	0	0 0	0	0	0	0.0	1.0
35 File EOPs/EAPs with town department and emergency personnel	х	6	EMD	1/2016-12/2016	Low	Municipal	1	0.5	0	0	0	0 2.0	0	0 0	0	0	0	0 0.0	2.0
WILDFIRES						·													
Consider requiring a source of fire protection water, such as cisterns or dry wells when municipal water service is not available for																			
36 residential or commercial building development.	х	2,6	Fire Department	1/2016-12/2016	High	Municipal	1	0.5	0	0	0	0 2.0		0 -0.	5 0	0	-0.5	0 -1.	5 0.5
For the areas of elevated wildfire risk, such as Canaan Mountain the town may consider a combination of all of the available						·													
37 methods of wildfire risk reduction	x	3,6	Fire Department	1/2017-12/2017	Low	Municipal	1	0.5	0.5	0	0	1 3.5	0	0 -0.	5 0	0	-0.5	0 -1.	5 2.0
Consider installing additional dry hydrants or fire ponds in outlying parts of town where public water is not readily available for 38 firefighting, including the areas identified in Section 9.5	x	6	Fire Department	1/2018-12/2018	High	Municipal	1	1 0.	5 0	0	1	0 5.5	0	0 0	0	0	-0.5	0 -1.0	0 4.5

NOTES

1. Departments:

EMD = Emergency Management Director

PW = Department of Public Works

P&Z = Planning & Zoning

2. Low = To be completed by staff or volunteers where costs are primarily printing, copying, or meetings and costs are less than

\$10,000; Moderate = Costs are less than \$100,000; High = Costs are > than \$100,000.

3. Funding sources:

HMA = Hazard Mitigation Assistance

A \* by "HMA" indicates that it has a potential for a benefit-cost ratio above 1.0

EOC = Emergency Operations Center grant (not currently active)

STEAP = Small Town Economic Assistance Program (State grant program)

Private = Weantinoge Heritage Land Trust and Heritage Land Preservation Trust

EMI = Emergency Management Institute (no charge for town staff)

CAFM = Connecticut Association of Flood Managers (www.ctfloods.org)

4. A beneficial or favorable rating = 1; an unfavorable rating = -1. Technical and Financial benefits and costs are double-weighted

(i.e. their values are counted twice in each subtotal)

APPENDIX B RECORD OF MUNICIPAL ADOPTION	



### Office of Selectmen

TOWN HALL • 100 PEASE STREET #1 • CANAAN, CONNECTICUT 06018
TELEPHONE (860) 824-7313
FAX (860) 824-3139

#### CERTIFICATE OF ADOPTION

#### TOWN OF NORTH CANAAN BOARD OF SELECTMAN

#### A RESOLUTION ADOPTING THE TOWN OF NORTH CANAAN HAZARD MITIGATION PLAN

WHEREAS, the Town of North Canaan has historically experienced severe damage from natural hazards and it continues to be vulnerable to the effects of those natural hazards profiled in the plan (e.g. flooding, high wind, thunderstorms, winter storms, earthquakes, dam failure, and wildfires), resulting in loss of property and life, ecocnomic hardship, and threats to public health and safety; and

WHEREAS, the Town of North Canaan has developed and received conditional approval from the Federal Emergency Management Agency (FEMA) for its Hazard Mitigation Plan under the requirements of 44 CFR 201.6; and

WHEREAS, committee meetings were held in 2013 and 2014 and public input was gathered by several methods regarding the development and review of the Hazard Mitigation Plan; and

WHEREAS, the Plan specifically addresses hazard mitigation strategies and Plan maintenance procedure for the Town of North Canaan; and

WHEREAS, the Plan recommends several hazard mitigation actions/projects that will provide mitigation for specific natural hazards that impact the Town of North Canaan, with the effect to protecting people and property from loss associated with those hazards; and

WHEREAS, adoption of this Plan will make the Town of North Canaan eligible for funding to alleviate the impacts of future hazards; now therefore be it

#### RESOLVED BY THE Board of Selectmen:

- 1. The Plan is hereby adopted as an official plan of the Town of North Canaan;
- 2. The respective officials identified in the mitigation strategy of the Plan are hereby directed to pursue implementation of the recommended actions assigned to them;
- 3. Future revisions and Plan maintenance required by 44 FR 201.6 and FEMA are hereby adopted as a part of this resolution for a period of five (5) years from the date of this resolution.

4. An annual report on the progress of the implementation elements of the Plan shall be presented to the Board of Selectmen.

Adopted this 22<sup>nd</sup> day of December, 2014 by the Board of Selectman of North Canaan, Connecticut.

Douglas E. Humes, Jr.

First Selectman

IN WITNESS WEHEREOF, the undersigned has affixed his/her signature and the corporate seal of the Town of North Canaan this 23 rd day of December 2014.

Town Clerk

APPENDIX C MITIGATION PROJECT STATUS WORKSHEET	

## **Mitigation Action Progress Report Form**

Progress Report Period	From Date:	To Date:						
Action/Project Title								
Responsible Agency								
Contact Name								
Contact Phone/Email								
Project Status	□ Project completed							
	☐ Project canceled							
	☐ Project on schedule☐ Anticipated completion date:							
	☐ Project delayed Explain							
	l for this project during this reporting pe							
2. What obstacles, problen	ns, or delays did the project encounter?							
3. If uncompleted, is the project still relevant? Should the project be changed or revised?								
4. Other comments								

A-7

A-35

## **Plan Update Evaluation Worksheet**

Plan Section	Considerations	Explanation
	Should new jurisdictions and/or districts be invited to participate in future plan updates?	
	Have any internal or external agencies been invaluable to the mitigation strategy?	
Planning Process	Can any procedures (e.g., meeting announcements, plan updates) be done differently or more efficiently?	
	Has the Planning Team undertaken any public outreach activities?	
	How can public participation be improved?	
	Have there been any changes in public support and/or decision- maker priorities related to hazard mitigation?	
	Have jurisdictions adopted new policies, plans, regulations, or reports that could be incorporated into this plan?	
Capability Assessment	Are there different or additional administrative, human, technical, and financial resources available for mitigation planning?	
	Are there different or new education and outreach programs and resources available for mitigation activities?	
	Has NFIP participation changed in the participating jurisdictions?	
	Has a natural and/or technical or human-caused disaster occurred?	
	Should the list of hazards addressed in the plan be modified?	
Risk Assessment	Are there new data sources and/or additional maps and studies available? If so, what are they and what have they revealed? Should the information be incorporated into future plan updates?	
ASSESSMENT	Do any new critical facilities or infrastructure need to be added to the asset lists?	
	Have any changes in development trends occurred that could create additional risks?	
	Are there repetitive losses and/or severe repetitive losses to document?	

A-8

A-37

Plan Section	Considerations	Explanation
	Is the mitigation strategy being implemented as anticipated? Were the cost and timeline estimates accurate?	
	Should new mitigation actions be added to the Action Plan? Should existing mitigation actions be revised or eliminated from the plan?	
Mitigation Strategy	Are there new obstacles that were not anticipated in the plan that will need to be considered in the next plan update?	
	Are there new funding sources to consider?	
	Have elements of the plan been incorporated into other planning mechanisms?	
Plan Maintenance	Was the plan monitored and evaluated as anticipated?	
Procedures	What are needed improvements to the procedures?	

DOCU	APPENDIX MENTATION OF PLA	X D AN DEVELOPMEN	Γ

#### APPENDIX D PREFACE

An extensive data collection, evaluation, and outreach program was undertaken to compile information about existing hazards and mitigation in the town of North Canaan as well as to identify areas that should be prioritized for hazard mitigation. Documentation of this process is provided within the following sets of meeting minutes and field reports.

zullo, who is a selectman but is applying as founder and executive director of Laurel City Revamp, a nonprofit that aims to clean up and refurbish old downtown mill buildings.

Despite support for the project from the public that attended the hearing, commission members had concerns about what they considered to be incomplete plans and whether the site can accommodate enough parking safely. Renzullo is proposing to have a 24-space parking garage in the basement, a bakery, a gallery and possibly a pub on the first floor and four upscale apartments on the second floor.

#### CORNWALL

# Northwest Corner residents asked about storm damage

Citizens and town officials in Canaan, Cornwall, Falls Village, Kent, Roxbury, Salisbury, Sharon, Warren and Washington are being asked for their input on which storms and other natural hazards have affected their homes, businesses or towns and to give ideas on how future damage can be prevented.

These ideas will be used to create a Natural Hazard Mitigation plan for each town. People can provide their input in two ways, either by attending a meeting which will be held Nov. 7 at 7 p.m. at Cornwall Town Hall (24 Pine St.) or by taking an online survey at surveymonkey.com/s/north-westctplans.

#### BURLINGTON

#### Celebration of Veterans Nov. 7 at Mills High School

Lewis S. Mills High School is hosting its annual Celebration of Veterans program Nov. 7, and all veterans who live in Harwinton or Burlington, the towns in the Region 10 school system, are invited.

Luncheon will be from noon to 1 p.m., followed by an assembly in the auditorium from 1 to 2 p.m.

Throughout the day, community members are invited to view students' artwork displayed in the main lobby and adjacent hallway.

For information and to RSVP, call 860-673-0423 x15311. If leaving a phone message, indicate full name and telephone number.



her time, is shown digging up the bed at the corner of Route 202 and Maple Street to make room for new bulbs that will bloom in the spring.

JOHN MCKENNA REPUBLICAN-AMERICAN

#### **ELECTION 2013:** TORRINGTON, HARWINTON, THOMASTON

# Familiar names on Torrington tickets

BY ALEC JOHNSON REPUBLICAN-AMERICAN

TORRINGTON — The city's political parties both are running slates of local powerhouse candidates for City Council, heavy with experience and names people know in many venues around

Torrington.

In an election that guarantees a new mayor and at least three new council members, political leaders hope the well-known candidates will appeal to voters and then go on to impact budgets, economic development and education. Republicans and Democrats, all of whom have pledged to work with their opponents and with the new mayor after Election Day on the historically cooperative council, say their candidates bring a wealth of diverse experience. Eight candidates, four from each party, are

running for six seats. The council's terms are for two years, to the mayor's fouryear term.

Republicans Gregg G. Cogswell and Drake L. Waldron and Democrat Paul F. Samele Jr. are seeking re-

See COUNCIL, Page 8B

# First selectman rematch stirs Harwinton's interest

BY ALEXA GORMAN REPUBLICAN-AMERICAN

HARWINTON — A rematch is on Nov. 5 between the first selectman and the former first selectman who lost his seat by 30 votes in 2011.

There have been no debates or joint public appearances, and mailboxes have been largely free of mudslinging on mailers, but acriCriss, 38, and Chiaramonte, 77, both said they want to preserve the town's rural character, to continue to preserve the town's open space and to stabilize the tax base. Both candidates also say they are running on their records.

The similar platforms might raise eyebrows among olders. Criss had an answer for that, too.

"This has been a frustrat-

# Mone stands by his record, Mosimann is for planning

BY ALEXA GORMAN REPUBLICAN-AMERICAN

THOMASTON — First Selectman Ed Mone is basing some of his campaign for a third term on past achievements. Democratic challenger Kristin Mosimann hopes voters look to the future.

"One of our goals is to bring a long-term strategic plan to every decision back to bite us."

Mosimann, 45, has served on the Board of Finance for eight years. She said she has been an advocate and educator of changes the board has made to prepare for the future. During her tenure on the board, she fought for the pension reforms and the changes made to retiree medical benefits. The pension reforms switched from

#### >>> OBITUARIES ON PAGES 6-7B

# Regional

### In The Journal this week

SALISBURYA3-A5	OBITUARIES A12
SHARON A5-A6	SPORTS A12 & A13
CORNWALLA7	OPINIONA14
KENT A8	VIEWPOINTA15
NORTH CANAAN A9	COMPASS A17-A19
FALLS VILLAGE A10	LEGALS A11
HEALTH A11	CLASSIFIEDS A20-A22

## Three-day forecast ......Rain/wind, high 6-

Friday	Rain/wind, high 64°/low 38°
Saturday	Some sun, 59°/35°
Sunday	Some sun, 48°/25°

# Lakeville Weather History

Date	Min.	Max.	Conditions
Oct 23	30	52	Mostly Cloudy
Oct 24	32	63	Mostly Cloudy
Oct 25	27.	51	Cloudy
Oct 26	25	56	Partly Sunny
Oct 27	39	55	Partly Sunny
Oct 28	27	59	Partly Sunny
Oct 29	31	48	Mostly Sunny

# Great Mountain Forest, its past and its future

## Input sought on natural hazard mitigation plan

Citizens and town officials in Canaan/Falls Village, Cornwall, Kent, North Canaan, Roxbury, Salisbury, Sharon, Warren and Washington are being asked for their input on which storms and other natural hazards have affected their homes, businesses or towns, and ideas on how future damage can be prevented.

These ideas will be used to create a natural hazard mitigation plan for each town. People can provide their input in two ways: by attending a public meeting which will be held on Thursday, Nov. 7, at 7 p.m. at the Cornwall Town Hall or by taking an online survey which can be accessed at www.surveymonkey. com/s/northwestctplans.

#### 'Ragtime' at Hotchkiss School

LAKEVILLE — The Hotchkiss Dramatic Association presents "Ragtime: The Musical" from Nov. 14 to 17 in the school's Walker Auditorium. The cast is comprised 1356 students; the show is directed by R Allen

#### POLICE BLOTTER

The following information was provided by the Connecticut State Police at Troop B. All suspects are considered innocent until proven guilty in a court of law.

Car hits guardrail

Liliana Melina Angel, 49, of Ocala, Fla., was driving south on Route 7 in North Canaan on Oct. 19. At about 8:27 a.m., about .7 miles north of Stein Lane, the 2012 Nissan Versa drifted off the right side of the road. It hit a guardrail. The entire side of the car was damaged. Melina Angel was not injured. She was charged with failure to maintain the proper lane.

#### **Evading driver**

Eugene Killen, 52, of Sharon was driving north on Route 361 in Sharon Oct. 24. At about 3:49 p.m., he turned onto Silver Lake Shore Road. The front bumper of his 2006 Ford F150 hit the left front quarter panel of a 2012 Subaru Forester driven by Cristina Comeau, 52, of Sharon. Comeau was stopped on Silver Lake Shore Road at the intersection. There were no injuries. Killen continued on without stopping. He was later found and given a written warning for failure to drive right.

#### Car stolen

Amotor vehicle was reported stolen from a Beebe Hill Road residence Oct. 25. Patrice Mc-

#### Cornwall Bridge Gr

- Cemetery & Civic memorials - Design On site lettering & monument cleaning - Rep

> (860) 480-0185 \* (860) boothillco@yahoo.i

# Boost Your Buying

Qualified homebuyers can <u>avoid priv</u> <u>insurance</u> with only 10% DOWN

# Kent plans for natural hazards

Plan required to seek grant for generator

BY LYNN MELLIS WORTHINGTON REPUBLICAN-AMERICAN

CORNWALL - Kent First Selectman Bruce K. Adams will be among those attending a public meeting today at 7 p.m. at Cornwall Town Hall, 24 Pine St., to discuss the mitigation of natural hazards.

Adams said Wednesday that Kent must develop a hazard mitigation plan to qualify for a state grant to purchase a new generator.

All towns are required to

have such a plan.

"We've put in an application for a generator at the Community House and we have to have a hazardous mitigation plan in place before you can get the money," Adams said.

Kent is completing its grant application through the Northwestern Connecticut Council of Governments and Adams said the town has been moved to the top of the list.

Residents of Canaan, Cornwall, Kent, North Canaan, Roxbury, Salisbury, Sharon, Warren and Washington are invited to the meeting to give their input on which storms and other natural hazards have affected their homes, businesses, or towns. Ideas will be sought on how future damage can be prevented.

Area residents can also provide input by taking an online survey at www.surveymonkey.com/s/northwestctplans.

Contact Lynn Mellis Worthington lynnmellw@gmail.com or on Twitter @lynnmellw.



To:

Richard Byrne, EMD, Town of Norfolk, CT	Ryan Courtien, Town Supervisor, Town of Dover, NY	
Jim O'Leary, EMD, Town of Goshen, CT	Bill Flood, Town Supervisor, Town of Amenia, NY	
Tom O'Hare, EMD, Town of Litchfield, CT	Edward Harvey, EMD, Town of New Marlborough, MA	
Tony Gedraitis, EMD, Town of Morris, CT	Brian Tobin, Selectboard Chair, Town of Mount Washington, MA	
Michael Devine, EMD, Town of Bethlehem, CT	Rhonda LaBombard, Town Administrator, Town of Sheffield, MA	
Randy Ashmore, EMD, Town of Woodbury, CT	Dana Smith, Dutchess County Department of Emergency Response (NY)	
Carol Hubert, Chief of Staff, Town of Southbury, CT	Rick Lynn, Planning Director, LHCEO (CT)	
Anne Marie Lindblom, Assistant to the First Selectman, Town of Bridgewater, CT	David Hannon, Deputy Director, HVCEO (CT)	
Mike Zarba, Director of Public Works, Town of New Milford, CT	Sam Gold, Acting Executive Director, COGCNV (CT)	
Clay Cope, First Selectman, Town of Sherman, CT	Mark Maloy, Berkshire Regional Planning Commission (MA)	
John Merwin, Town Supervisor, Town of North East, NY		

RE: Hazard Mitigation Plans for Canaan, Cornwall, Kent, North Canaan, Salisbury, Sharon, Roxbury, Warren, and Washington (Connecticut)

MMI #3843-04-1

Milone & MacBroom, Inc. (MMI) is working with the towns of Canaan, Cornwall, Kent, North Canaan, Salisbury, Sharon, Roxbury, Warren, and Washington to develop hazard mitigation plans. In recent years, FEMA has emphasized the need for communities to work together to address hazards that span municipal boundaries. Thus, these municipalities are interested in coordinating with your jurisdictions relative to hazards that could cross municipal boundaries such as flooding, as well as strategies for hazard mitigation that could be addressed by two or more communities.

We understand that you are the representative that may be involved with hazard mitigation planning in your municipality, and therefore will have the most valuable input for the plans being developed for Canaan, Cornwall, Kent, North Canaan, Salisbury, Sharon, Roxbury, Warren, and Washington. Please take a moment to share your thoughts for the following:

- 1. Does your municipality face any shared hazards with Canaan, Cornwall, Kent, North Canaan, Salisbury, Sharon, Roxbury, Warren, or Washington that could be addressed by both communities? Examples could be flooding along a stream that flows across a town boundary or windstorms that damage power lines that cross the town boundary.
- 2. Can you think of any strategies for hazard mitigation that could benefit both communities?
- 3. Does your municipality currently cooperate with Canaan, Cornwall, Kent, North Canaan, Salisbury, Sharon, Roxbury, Warren, and Washington on any of the following:
  - Local emergency communications or response
  - Road maintenance, drainage system maintenance, public works, etc.
  - Communications with electric and other utility providers

You may contact either of the undersigned via email (<a href="mailto:davem@miloneandmacbroom.com">davem@miloneandmacbroom.com</a> or <a href="mailto:maryellene@miloneandmacbroom.com">maryellene@miloneandmacbroom.com</a>) or telephone (203-271-1773). A written response is not necessary. Thank you for your time.

\*\*Maryelle\*\* Edward\*\*

David Murphy, P.E., CFM

Managing Project Engineer, Water Resources

Maryellen Edwards

**Environmental Scientist** 

3843-04-1-d213-ltr-move.docx

Milone & MacBroom, Inc., 99 Realty Drive, Cheshire, Connecticut 06410 (203) 271-1773 Fax (203) 272-9733 www.miloneandmacbroom.com























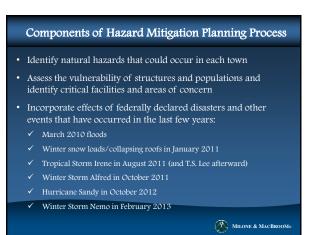



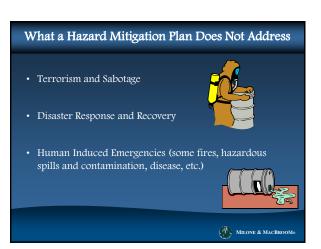

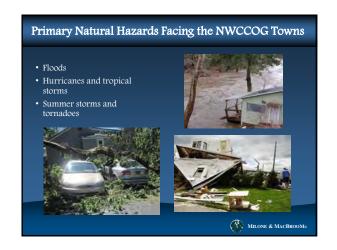

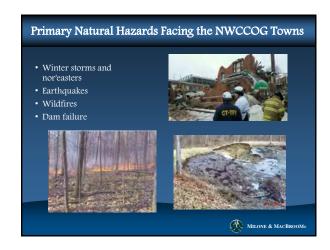













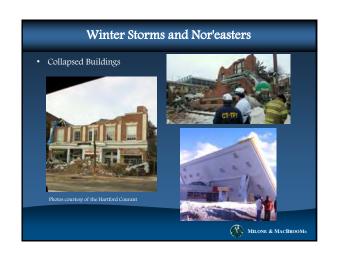

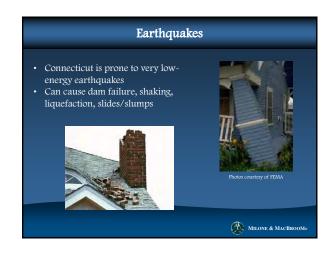

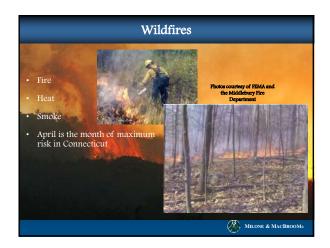

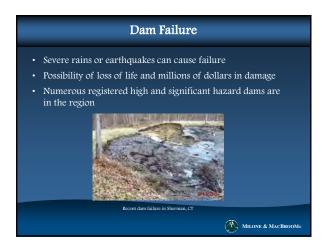





#### **Next Steps**

- Incorporate input from residents, business owners, and public officials
- Survey will be open through end of November: https://www.surveymonkey.com/northwestctplans
- Develop mitigation strategies
- Prepare draft plans for review by the municipalities and the public
- Adopt and implement the plans





#### **Meeting Minutes**

# HAZARD MITIGATION PLAN Public Information Meeting for NWCCOG Communities November 7, 2013 7 P.M.

#### A. Welcome & Introductions

Gordon Ridgway, Town of Cornwall First Selectman
Skip Kearns, Cornwall resident
Heidi Kearns, Cornwall Planning and Zoning
David Colbert, Cornwall Planning and Zoning
Jack Travers, Town of Warren
Michael Jastremski, Housatonic Valley Association
Karen Bartomioli, Lakeville Journal
Jocelyn Ayer, NWCCOG

□ Scott Bighinatti, Milone & MacBroom, Inc. (MMI)

The following individuals attended the public information meeting:

Two other members of the public attended who did not sign-in. At least one of the members was from the Town of Kent.

#### B. Power Point Presentation

Mr. Bighinatti gave a presentation describing the background of hazard mitigation planning, the goals at the local level, the availability of grant funding, the types of projects that could be performed, and the types of hazards that could affect the local communities.

#### C. Public Input and Discussion

Prior to the meeting, Mr. Jastremski provided information on the Stream Habitat Continuity Surveys that the Housatonic Valley Association will be conducting in 2014 and 2015. As these assessments will focus on improving areas where roads cross over streams, there is the potential to tie these surveys into hazard mitigation planning activities.

The group had questions as to how the plans are being funded. Ms. Ayer explained that the plan for each community was being 75% funded under a grant through FEMA. The remaining 25% of the funding is being paid for out of NWCCOG member dues.

The group had additional questions regarding the FEMA grant programs. Mr. Bighinatti explained that these particular plans would not affect any funding opportunities to which NWCCOG communities were already entitled. Instead, adoption of the plans open up additional opportunities to obtain grant funding.



Meeting Minutes November 7, 2013 Page 2

The group mentioned that the prevalence of dead end roads in the area make emergency access difficult, particularly when trees fall and strand residents. The representative from Warren indicated that their community had been opening up unimproved sections of roads in order to provide emergency access via a second egress.

The Downtown Streetscape project in Kent was mentioned as a potential mitigation area for overhead power lines. Mr. Bighinatti explained that while moving overhead wires underground is a project eligible for grant funding, such projects are very expensive often do not generate enough benefits to be considered cost-effective and therefore qualify for a grant.

A discussion regarding the resizing of culverts took place. One example was how the West Cornwall Bridge overtopped in 1955 causing significant flooding along Main Street. While the current bridge was sized for a particular storm event at the time, Mr. Bighinatti explained that as the frequency and magnitude of rainfall has been increasing over the past several decades many communities are finding that their infrastructure can no longer convey the same frequency storm event without overtopping. A standard recommendation in each plan will be to review culvert conveyance based on existing hydrology.


The group mentioned that beaver dams were a big concern related to flooding, particularly in Cornwall. Town personnel should be contacted to obtain more information regarding these areas and existing mitigation measures.

Mr. Ridgway discussed the importance of these particular FEMA grants in relation to being able to fund new generators. The Town of Cornwall is seeking a \$40,000 grant under HMGP for a new generator at the West Cornwall Fire House. He also mentioned that a section of streambed along River Road is located near the road elevation and a recent flood almost washed out the road. This could potentially be an area where a grant could be useful. Also, the Town has a concern with a privately-owned dam on Popple Swamp Road. It is owned by an absentee landowner who has reportedly not been doing the proper maintenance on the dam. The Town has contacted the Dam Safety Division at DEEP but no progress has been made.


Siltation in Lake Waramaug Pond in Warren was mentioned as an issue. A large area has filled in with silt that is potentially reducing the flood storage capacity of the pond. The Town would like to get a grant to dredge the sediment.



MILONE & MACBRO

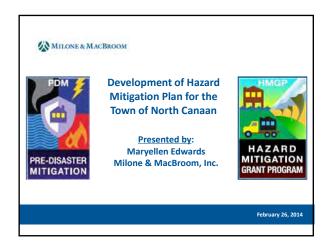



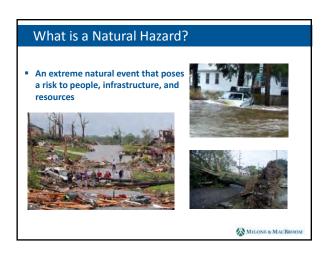



# Reduce loss of life and damage to property and infrastructure Reduce the costs to residents and businesses (taxes, insurance, repair costs, etc.) Educate residents and policy-makers about natural hazard risk and vulnerability Connect hazard mitigation planning to other community planning efforts Enhance and preserve natural resource systems in the community



#### **Update on Hazard Mitigation Grant Programs**

- Local communities must have a FEMA-approved Hazard Mitigation Plan in place to receive Federal Grant Funds for Hazard Mitigation Projects
  - o PDM (Pre-Disaster Mitigation) annual
  - o FMA (Flood Mitigation Assistance) annual
  - HMGP (Hazard Mitigation Grant Program) after disasters
- Connecticut has \$16M to distribute under HMGP allocated to infrastructure and elevations or acquisitions or floodprone properties



#### How Can the Plan be Used?

- Grants can be used for:
  - o Building acquisitions or elevations
  - o Culvert replacements
  - o Drainage projects
  - o Riverbank stabilization
  - o Landslide stabilization
  - o Wind retrofits
  - o Seismic retrofits
  - o Snow load retrofits
  - o Standby power supplies for critical facilities


FEMA's new cost effectiveness guidelines will make acquisitions and elevations easier






MILONE & MACBROOM



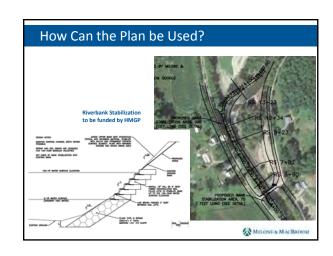

# Hazards Proposed to Include in the Plan ■ Floods ■ Hurricanes and tropical storms ■ Summer storms and tornadoes ■ WILLIAM TO A MACKROOM WHILDNER MACKROOM

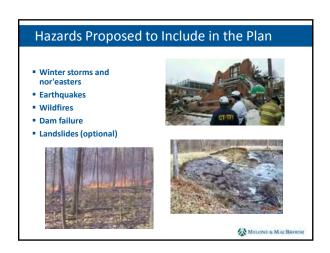

A-24 2

#### Components of Hazard Mitigation Plan Process

- Review natural hazards that could occur in North Canaan
- Review the vulnerability of structures and populations and identify critical facilities and areas of concern
- Incorporate effects of federally declared disasters that have occurred in the last few years:
  - o March 2010 floods
  - o Winter snow loads/collapsing roofs in January 2011
  - o Tropical Storm Irene in August 2011 (and T.S. Lee afterward)
  - Winter Storm Alfred in October 2011
  - Hurricane Sandy in October 2012
  - o Winter Storm Nemo in February 2013



#### Components of Hazard Mitigation Plan Process

- Assess adequacy of mitigation measures currently in place such as regulations and drainage projects
- Develop mitigation goals, strategies, and actions
- Outreach to stakeholders and neighboring towns
- HAZUS vulnerability/risk analysis
- Public participation
- Develop plan document
- State and FEMA approvals
- Local adoption

MILONE & MACBROOM

#### Scope of Services and Schedule

- Task 1 Project Initiation and Data Collection: February 2014
- Task 2 Risk and Vulnerability Assessment: HAZUS already completed; additional analysis March 2014
- Task 3 Strategy and Plan Development: February-March 2014
- Task 4 DEMHS and FEMA Review and Plan Adoption: April 2014 and continuing as needed



#### **Data Collection and Discussion**

- What are North Canaan's critical facilities?
- Shelters and evacuation routes
- Standby power supplies
- Discussion of recent storms (Irene, Alfred, Sandy)
- Development and redevelopment trends
- Utilities above/below ground?
- Areas of flooding
- How are drainage and flooding complaints received and tracked?

MILONE & MACBROOM

3

#### **Data Collection and Discussion**

- Have any bridges, culverts, or stormwater systems been replaced or upgraded recently?
- Areas prone to wind damage or increased wind damage risk
- Tree maintenance and tree warden budget
- Snow and ice removal routes and capabilities
- Areas prone to icing or drifts in winter
- Dams and effects of dam failure
- Areas without fire protection and use of dry hydrants and cisterns
- Areas prone to wildfires, fire department capabilities, coordination with nearby municipalities

MILONE & MACBROOM



A-25

#### **Typical Hazard Mitigation Strategies**

- Elevate or remove flood-prone buildings
- Wet and dry floodproofing
- Move critical facilities from flood zones
- Strengthen or reinforce shelters
- Remove and replace undersized and/or failing bridges and culverts
- Replace overhead utilities with underground utilities
- Organize tree maintenance priorities and scheduling
- Enhance fire suppression capabilities
- Public education programs dissemination
- of public safety information







#### Hazard Mitigation Strategies for North Canaan

- Goals?
- Strategies and actions?
- What one or two things can be done in North Canaan with current budgets?
- What one or two things would be done in North Canaan if money was not a concern?



#### **Next Steps**

- Materials needed or resulting from this meeting
  - $\circ\;$  Are POCD, Regulations, and zoning map on town web site?
  - o Are any specific ordinances related to hazard mitigation?
  - NFIP regulations: Is flood damage prevention included in the municipal code, zoning, or both?



A-26

4

#### **Meeting Minutes**

#### Hazard Mitigation Plan Data Collection Meeting for North Canaan February 26, 2014

A brief meeting was held on February 26, 2014 to discuss aspects of the Hazard

Mitigation Plan for the town of North Canaan.
The meeting attendees included:
<ul> <li>Mr. Bryon Carlson - Highway Department</li> <li>Ms. Maryellen Edwards - Milone &amp; MacBroom, Inc. (MMI)</li> </ul>
The following were discussion points:
Critical Facilities include:
<ul> <li>The Town Hall is the primary shelter and the Emergency Operations Center. It has standby power</li> <li>The North Canaan Elementary School is the secondary shelter and has standby power</li> <li>The Highway Garage – has standby power</li> <li>The North Canaan Firehouse – has standby power</li> <li>The Ambulance Garage – has standby power</li> </ul>
☐ The Senior Center - has standby power - Quinn street – comfort measure for residents
The town has its own bus that can be used in the event of evacuations. Reportedly, the bus was used twice to evacuate residents of the senior center.

The main evacuation routes for the town are State Roads 7 and 44.

Drainage complaints are routed to Highway Department and First Selectman

Does the town subscribe the CTAlert Emergency notification system? If not, what method of notification is used? Yes - have their own and use blackboard connect (primary)

Development Trends – has there been recent development in the town? Are there any anticipated developments residential or commercial? Limited development has occurred in North Canaan. The recent economic downturn generally slowed housing development in North Canaan.

Has the town considered replacing overhead utilities with underground? Are utilities in new developments required to be underground? All new ones are required to place utilities underground.

#### Flooding:

The main source of flooding is the Blackberry River, Camp Brook and the Housatonic River.

Camp brook is a state culvert that needs to be replaced – source of flooding - main flooding area in town

Camp Brook periodically floods and the basements of homes have to be pumped out.

Hurricane Irene caused flooding along Allendale Road and Old Turnpike Road. Trees were down and power outages lasted a few days.

The town fared pretty well during Hurricane Sandy with minor tree damage.

Are there areas in town that are or particular concern due to failing culverts, riverbank stabilization etc.? No problems

The NFIP administrator for the town is the First Selectman.

#### Wind

The outlying areas and secondary back roads are of particular concern with respect to wind damage. No more than any other area – the town is very wooded

The town has a good relationship with CL&P. Residents on private roads do their own trimming. The town and CL&P trim throughout the town.

The tree maintenance budget is generally depleted.

Corey Bush is the tree warden.

#### Winter Storms

When available the town uses Ice B' Gone for treatment of roads. The town also uses a sand/salt combination for treatment.

The town has four routes and four trucks for plowing. The town also has two additional small trucks that are predominately used for parking lots.

Drifting snow is a concern on several roads such as Allendale Road, Allen's Lane and Sodom Road.

Did any roofs collapse in North Canaan as a result of the winter snow loads in January 2011? Small old barn but that's it

The plowing budget is generally depleted.

#### Wildfire -

The town has a hydrant system and fire ponds for firefighting.

What are the primary areas of concern in the town with respect to potential wildfires? Canaan Mountain area could be an area of concern – rough terrain

The town has mutual aid agreements for firefighting – with Millerton New York, Sharon, Cornwall, Falls Village, Salisbury, Norfolk and Sheffield Massachusetts

Have there been any recent wildfires? In town not in several years

Hydrant area and non-hydrant area on outskirts of town – fire ponds are located in outskirts and are manmade and natural – no real water issues

#### Dams -

Are there any concerns with dams? One stormwater retention dam on whiting – no issues

### **Mitigation Ideas:**

Are there any projects the town would like to implement in order to mitigate impacts from natural hazards (i.e. culvert replacements, riverbank stabilization, elevations, and acquisitions).

APPENDIX E HAZUS DOCUMENTATION	

# **Hazus-MH: Flood Event Report**

Region Name:	North Canaan FIT
--------------	------------------

Flood Scenario: Blackberry River

Print Date: Monday, December 23, 2013

#### Disclaimer:

Totals only reflect data for those census tracts/blocks included in the user's study region.

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social

# **Table of Contents**

Section	Page #
General Description of the Region	3
Building Inventory	4
General Building Stock	
Essential Facility Inventory	
Flood Scenario Parameters	5
Building Damage	6
General Building Stock	
Essential Facilities Damage	
Induced Flood Damage	8
Debris Generation	
Social Impact	8
Shelter Requirements	
Economic Loss	9
Building-Related Losses	
Appendix A: County Listing for the Region	10
Appendix B: Regional Population and Building Value Data	11

# General Description of the Region

Hazus is a regional multi-hazard loss estimation model that was developed by the Federal Emergency Management Agency (FEMA) and the National Institute of Building Sciences (NIBS). The primary purpose of Hazus is to provide a methodology and software application to develop multi-hazard losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from multi-hazards and to prepare for emergency response and recovery.

The flood loss estimates provided in this report were based on a region that included 1 county(ies) from the following state(s):

Connecticut

#### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19 square miles and contains 85 census blocks. The region contains over 1 thousand households and has a total population of 3,350 people (2000 Census Bureau data). The distribution of population by State and County for the study region is provided in Appendix B.

There are an estimated 1,512 buildings in the region with a total building replacement value (excluding contents) of 330 million dollars (2006 dollars). Approximately 86.31% of the buildings (and 66.56% of the building value) are associated with residential housing.

### **General Building Stock**

Hazus estimates that there are 1,512 buildings in the region which have an aggregate total replacement value of 330 million (2006 dollars). Table 1 and Table 2 present the relative distribution of the value with respect to the general occupancies by Study Region and Scenario respectively. Appendix B provides a general distribution of the building value by State and County.

Table 1
Building Exposure by Occupancy Type for the Study Region

Occupancy	Exposure (\$1000)	Percent of Total
Residential	219,576	66.6%
Commercial	59,176	17.9%
Industrial	35,688	10.8%
Agricultural	5,453	1.7%
Religion	5,118	1.6%
Government	2,723	0.8%
Education	2,167	0.7%
Total	329,901	100.00%

Table 2
Building Exposure by Occupancy Type for the Scenario

Occupancy	Exposure (\$1000)	Percent of Total
Residential	59,968	70.0%
Commercial	21,632	25.3%
Industrial	2,131	2.5%
Agricultural	556	0.6%
Religion	632	0.7%
Government	706	0.8%
Education	0	0.0%
Total	85,625	100.00%

#### **Essential Facility Inventory**

For essential facilities, there are no hospitals in the region with a total bed capacity of no beds. There are 1 school, 1 fire station, no police stations and no emergency operation centers.

# Flood Scenario Parameters

Hazus used the following set of information to define the flood parameters for the flood loss estimate provided in this report.

Study Region Name: North Canaan FIT

Scenario Name: Blackberry River

Return Period Analyzed: 100

Analysis Options Analyzed: No What-Ifs

#### **General Building Stock Damage**

Hazus estimates that about 2 buildings will be at least moderately damaged. This is over 0% of the total number of buildings in the scenario. There are an estimated 1 buildings that will be completely destroyed. The definition of the 'damage states' is provided in Volume 1: Chapter 5 of the Hazus Flood Technical Manual. Table 3 below summarizes the expected damage by general occupancy for the buildings in the region. Table 4 summarizes the expected damage by general building type.

**Table 3: Expected Building Damage by Occupancy** 

	1-10		11-2	0	21-3	0	31-4	0	41-5	50	Substar	ntially
Occupancy	Count	(%)	Count	(%)								
Agriculture	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Commercial	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Education	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Government	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Industrial	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Religion	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Residential	0	0.00	0	0.00	0	0.00	0	0.00	1	50.00	1	50.00
Total	0		0		0		0		1		1	

Table 4: Expected Building Damage by Building Type

Building	1-10	)	11-20	)	21-30	)	31-40	0	41-5	60	Substa	ntially
Туре	Count	(%)	Count	(%)								
Concrete	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
ManufHousing	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Masonry	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Steel	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Wood	0	0.00	0	0.00	0	0.00	0	0.00	1	50.00	1	50.00

# **Essential Facility Damage**

Before the flood analyzed in this scenario, the region had 0 hospital beds available for use. On the day of the scenario flood event, the model estimates that 0 hospital beds are available in the region.

**Table 5: Expected Damage to Essential Facilities** 

# Facilities

Classification	Total	At Least Moderate	At Least Substantial	Loss of Use
Fire Stations	1	0	0	0
Hospitals	0	0	0	0
Police Stations	0	0	0	0
Schools	1	0	0	0

If this report displays all zeros or is blank, two possibilities can explain this.

- (1) None of your facilities were flooded. This can be checked by mapping the inventory data on the depth grid.
- (2) The analysis was not run. This can be tested by checking the run box on the Analysis Menu and seeing if a message box asks you to replace the existing results.

### **Induced Flood Damage**

#### **Debris Generation**

Hazus estimates the amount of debris that will be generated by the flood. The model breaks debris into three general categories: 1) Finishes (dry wall, insulation, etc.), 2) Structural (wood, brick, etc.) and 3) Foundations (concrete slab, concrete block, rebar, etc.). This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 157 tons of debris will be generated. Of the total amount, Finishes comprises 81% of the total, Structure comprises 12% of the total. If the debris tonnage is converted into an estimated number of truckloads, it will require 6 truckloads (@25 tons/truck) to remove the debris generated by the flood.

## Social Impact

#### **Shelter Requirements**

Hazus estimates the number of households that are expected to be displaced from their homes due to the flood and the associated potential evacuation. Hazus also estimates those displaced people that will require accommodations in temporary public shelters. The model estimates 20 households will be displaced due to the flood. Displacement includes households evacuated from within or very near to the inundated area. Of these, 23 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

The total economic loss estimated for the flood is 3.54 million dollars, which represents 4.13 % of the total replacement value of the scenario buildings.

### **Building-Related Losses**

The building losses are broken into two categories: direct building losses and business interruption losses. The direct building losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the flood. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the flood.

The total building-related losses were 3.53 million dollars. 0% of the estimated losses were related to the business interruption of the region. The residential occupancies made up 43.84% of the total loss. Table 6 below provides a summary of the losses associated with the building damage.

Table 6: Building-Related Economic Loss Estimates

(Millions of dollars)

Category	Area	Residential	Commercial	Industrial	Others	Total
Building Los	<u>ss</u>					
	Building	1.03	0.34	0.05	0.01	1.43
	Content	0.53	1.41	0.08	0.05	2.07
	Inventory	0.00	0.02	0.01	0.00	0.03
	Subtotal	1.55	1.77	0.14	0.07	3.53
Business In	terruption_					
	Income	0.00	0.01	0.00	0.00	0.01
	Relocation	0.00	0.00	0.00	0.00	0.00
	Rental Income	0.00	0.00	0.00	0.00	0.00
	Wage	0.00	0.00	0.00	0.00	0.01
	Subtotal	0.00	0.01	0.00	0.00	0.01
ALL	Total	1.55	1.78	0.14	0.07	3.54

# **Appendix A: County Listing for the Region**

Connecticut

Litchfield

# **Appendix B: Regional Population and Building Value Data**

### **Building Value (thousands of dollars)**

	Population	Residential	Non-Residential	Total
Connecticut				
Litchfield	3,350	219,576	110,325	329,901
Total	3,350	219,576	110,325	329,901
Total Study Region	3,350	219,576	110,325	329,901

# Hazus-MH: Flood Event Report

Region Name:	North Canaan FIT
--------------	------------------

Flood Scenario: Camp Brook

Print Date: Monday, December 23, 2013

#### Disclaimer:

Totals only reflect data for those census tracts/blocks included in the user's study region.

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social

# **Table of Contents**

Section		Page #
General De	scription of the Region	3
Building In	ventory	4
G	eneral Building Stock	
E	ssential Facility Inventory	
Flood Scen	ario Parameters	5
Building Da	amage	6
G	eneral Building Stock	
E	ssential Facilities Damage	
Induced Flo	ood Damage	8
С	ebris Generation	
Social Impa	act	8
s	helter Requirements	
Economic I	Loss	9
E	uilding-Related Losses	
Appendix A	a: County Listing for the Region	10
Appendix E	8: Regional Population and Building Value Data	11

# General Description of the Region

Hazus is a regional multi-hazard loss estimation model that was developed by the Federal Emergency Management Agency (FEMA) and the National Institute of Building Sciences (NIBS). The primary purpose of Hazus is to provide a methodology and software application to develop multi-hazard losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from multi-hazards and to prepare for emergency response and recovery.

The flood loss estimates provided in this report were based on a region that included 1 county(ies) from the following state(s):

Connecticut

#### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19 square miles and contains 85 census blocks. The region contains over 1 thousand households and has a total population of 3,350 people (2000 Census Bureau data). The distribution of population by State and County for the study region is provided in Appendix B.

There are an estimated 1,512 buildings in the region with a total building replacement value (excluding contents) of 330 million dollars (2006 dollars). Approximately 86.31% of the buildings (and 66.56% of the building value) are associated with residential housing.

#### **General Building Stock**

Hazus estimates that there are 1,512 buildings in the region which have an aggregate total replacement value of 330 million (2006 dollars). Table 1 and Table 2 present the relative distribution of the value with respect to the general occupancies by Study Region and Scenario respectively. Appendix B provides a general distribution of the building value by State and County.

Table 1
Building Exposure by Occupancy Type for the Study Region

Occupancy	Exposure (\$1000)	Percent of Total
Residential	219,576	66.6%
Commercial	59,176	17.9%
Industrial	35,688	10.8%
Agricultural	5,453	1.7%
Religion	5,118	1.6%
Government	2,723	0.8%
Education	2,167	0.7%
Total	329,901	100.00%

Table 2
Building Exposure by Occupancy Type for the Scenario

Occupancy	Exposure (\$1000)	Percent of Total
		00.00/
Residential	59,291	63.9%
Commercial	25,268	27.2%
Industrial	3,336	3.6%
Agricultural	206	0.2%
Religion	1,521	1.6%
Government	943	1.0%
Education	2,167	2.3%
Total	92,732	100.00%

#### **Essential Facility Inventory**

For essential facilities, there are no hospitals in the region with a total bed capacity of no beds. There are 1 school, 1 fire station, no police stations and no emergency operation centers.

# Flood Scenario Parameters

Hazus used the following set of information to define the flood parameters for the flood loss estimate provided in this report.

Study Region Name: North Canaan FIT

Scenario Name: Camp Brook

Return Period Analyzed: 100

Analysis Options Analyzed: No What-Ifs

### **General Building Stock Damage**

Hazus estimates that about 1 building will be at least moderately damaged. This is over 0% of the total number of buildings in the scenario. There are an estimated 0 buildings that will be completely destroyed. The definition of the 'damage states' is provided in Volume 1: Chapter 5 of the Hazus Flood Technical Manual. Table 3 below summarizes the expected damage by general occupancy for the buildings in the region. Table 4 summarizes the expected damage by general building type.

**Table 3: Expected Building Damage by Occupancy** 

	1-10		11-20	)	21-30	)	31-40	)	41-	50	Substan	itially
Occupancy	Count	(%)	Count	(%)								
Agriculture	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Commercial	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Education	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Government	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Industrial	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Religion	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Residential	0	0.00	0	0.00	0	0.00	0	0.00	1	100.00	0	0.00
Total	0	·	0		0		0	·	1		0	

Table 4: Expected Building Damage by Building Type

Building	1-10		11-20		21-30		31-40		41-50		Substantially	
Туре	Count	(%)	Count	(%)								
Concrete	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
ManufHousing	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Masonry	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Steel	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Wood	0	0.00	0	0.00	0	0.00	0	0.00	1	100.00	0	0.00

# **Essential Facility Damage**

Before the flood analyzed in this scenario, the region had 0 hospital beds available for use. On the day of the scenario flood event, the model estimates that 0 hospital beds are available in the region.

**Table 5: Expected Damage to Essential Facilities** 

# Facilities

Classification	Total	At Least Moderate	At Least Substantial	Loss of Use
Fire Stations	1	0	0	0
Hospitals	0	0	0	0
Police Stations	0	0	0	0
Schools	1	0	0	0

If this report displays all zeros or is blank, two possibilities can explain this.

- (1) None of your facilities were flooded. This can be checked by mapping the inventory data on the depth grid.
- (2) The analysis was not run. This can be tested by checking the run box on the Analysis Menu and seeing if a message box asks you to replace the existing results.

### **Induced Flood Damage**

#### **Debris Generation**

Hazus estimates the amount of debris that will be generated by the flood. The model breaks debris into three general categories: 1) Finishes (dry wall, insulation, etc.), 2) Structural (wood, brick, etc.) and 3) Foundations (concrete slab, concrete block, rebar, etc.). This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 68 tons of debris will be generated. Of the total amount, Finishes comprises 97% of the total, Structure comprises 2% of the total. If the debris tonnage is converted into an estimated number of truckloads, it will require 3 truckloads (@25 tons/truck) to remove the debris generated by the flood.

## Social Impact

#### **Shelter Requirements**

Hazus estimates the number of households that are expected to be displaced from their homes due to the flood and the associated potential evacuation. Hazus also estimates those displaced people that will require accommodations in temporary public shelters. The model estimates 37 households will be displaced due to the flood. Displacement includes households evacuated from within or very near to the inundated area. Of these, 73 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

The total economic loss estimated for the flood is 3.09 million dollars, which represents 3.33 % of the total replacement value of the scenario buildings.

### **Building-Related Losses**

The building losses are broken into two categories: direct building losses and business interruption losses. The direct building losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the flood. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the flood.

The total building-related losses were 3.08 million dollars. 0% of the estimated losses were related to the business interruption of the region. The residential occupancies made up 16.09% of the total loss. Table 6 below provides a summary of the losses associated with the building damage.

Table 6: Building-Related Economic Loss Estimates

(Millions of dollars)

Category	Area	Residential	Commercial	Industrial	Others	Total
Building Lo	<u>ss</u>					
	Building	0.33	0.44	0.13	0.01	0.91
	Content	0.17	1.59	0.24	0.10	2.10
	Inventory	0.00	0.02	0.04	0.00	0.06
	Subtotal	0.50	2.05	0.41	0.12	3.08
Business In	terruption_					
	Income	0.00	0.01	0.00	0.00	0.01
	Relocation	0.00	0.00	0.00	0.00	0.00
	Rental Income	0.00	0.00	0.00	0.00	0.00
	Wage	0.00	0.01	0.00	0.00	0.01
	Subtotal	0.00	0.01	0.00	0.00	0.01
ALL	Total	0.50	2.06	0.41	0.12	3.09

# **Appendix A: County Listing for the Region**

Connecticut

Litchfield

# **Appendix B: Regional Population and Building Value Data**

### **Building Value (thousands of dollars)**

	Population	Residential	Non-Residential	Total
Connecticut	]			
Litchfield	3,350	219,576	110,325	329,901
Total	3,350	219,576	110,325	329,901
Total Study Region	3,350	219,576	110,325	329,901

# **Hazus-MH: Flood Event Report**

Region Name: North Canaan FIT
North Canaan FII

Flood Scenario: Housatonic

Print Date: Monday, December 23, 2013

#### Disclaimer:

Totals only reflect data for those census tracts/blocks included in the user's study region.

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social

# **Table of Contents**

Section	on .	Page #
Gener	al Description of the Region	3
Buildi	ng Inventory	4
	General Building Stock	
	Essential Facility Inventory	
Flood	Scenario Parameters	5
Buildi	ng Damage	6
	General Building Stock	
	Essential Facilities Damage	
Induce	ed Flood Damage	8
	Debris Generation	
Social	Impact	8
	Shelter Requirements	
Econo	omic Loss	9
	Building-Related Losses	
Apper	ndix A: County Listing for the Region	10
Apper	ndix B: Regional Population and Building Value Data	11

### General Description of the Region

Hazus is a regional multi-hazard loss estimation model that was developed by the Federal Emergency Management Agency (FEMA) and the National Institute of Building Sciences (NIBS). The primary purpose of Hazus is to provide a methodology and software application to develop multi-hazard losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from multi-hazards and to prepare for emergency response and recovery.

The flood loss estimates provided in this report were based on a region that included 1 county(ies) from the following state(s):

Connecticut

#### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19 square miles and contains 85 census blocks. The region contains over 1 thousand households and has a total population of 3,350 people (2000 Census Bureau data). The distribution of population by State and County for the study region is provided in Appendix B.

There are an estimated 1,512 buildings in the region with a total building replacement value (excluding contents) of 330 million dollars (2006 dollars). Approximately 86.31% of the buildings (and 66.56% of the building value) are associated with residential housing.

### **General Building Stock**

Hazus estimates that there are 1,512 buildings in the region which have an aggregate total replacement value of 330 million (2006 dollars). Table 1 and Table 2 present the relative distribution of the value with respect to the general occupancies by Study Region and Scenario respectively. Appendix B provides a general distribution of the building value by State and County.

Table 1
Building Exposure by Occupancy Type for the Study Region

Occupancy	Exposure (\$1000)	Percent of Total		
Residential	219,576	66.6%		
Commercial	59,176	17.9%		
Industrial	35,688	10.8%		
Agricultural	5,453	1.7%		
Religion	5,118	1.6%		
Government	2,723	0.8%		
Education	2,167	0.7%		
Total	329,901	100.00%		

Table 2
Building Exposure by Occupancy Type for the Scenario

Occupancy	Exposure (\$1000)	Percent of Total
Residential	37,792	78.2%
Commercial	9,759	20.2%
Industrial	230	0.5%
Agricultural	216	0.4%
Religion	226	0.5%
Government	116	0.2%
Education	0	0.0%
Total	48,339	100.00%

#### **Essential Facility Inventory**

For essential facilities, there are no hospitals in the region with a total bed capacity of no beds. There are 1 school, 1 fire station, no police stations and no emergency operation centers.

# Flood Scenario Parameters

Hazus used the following set of information to define the flood parameters for the flood loss estimate provided in this report.

Study Region Name: North Canaan FIT

Scenario Name: Housatonic

Return Period Analyzed: 100

Analysis Options Analyzed: No What-Ifs

#### **General Building Stock Damage**

Hazus estimates that about 7 buildings will be at least moderately damaged. This is over 0% of the total number of buildings in the scenario. There are an estimated 3 buildings that will be completely destroyed. The definition of the 'damage states' is provided in Volume 1: Chapter 5 of the Hazus Flood Technical Manual. Table 3 below summarizes the expected damage by general occupancy for the buildings in the region. Table 4 summarizes the expected damage by general building type.

**Table 3: Expected Building Damage by Occupancy** 

	1-10		11-20 21-30		31-4	0	41-5	50	Substantially			
Occupancy	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Agriculture	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Commercial	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Education	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Government	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Industrial	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Religion	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Residential	0	0.00	0	0.00	0	0.00	1	14.29	3	42.86	3	42.86
Total	0		0		0		1		3		3	

Table 4: Expected Building Damage by Building Type

Building	1-10	)	11-20	)	21-30	)	31-4	0	41-5	60	Substa	ntially
Туре	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Concrete	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
ManufHousing	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Masonry	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Steel	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Wood	0	0.00	0	0.00	0	0.00	1	14.29	3	42.86	3	42.86

# **Essential Facility Damage**

Before the flood analyzed in this scenario, the region had 0 hospital beds available for use. On the day of the scenario flood event, the model estimates that 0 hospital beds are available in the region.

**Table 5: Expected Damage to Essential Facilities** 

# Facilities

Classification	Total	At Least Moderate	At Least Substantial	Loss of Use
Fire Stations	1	0	0	0
Hospitals	0	0	0	0
Police Stations	0	0	0	0
Schools	1	0	0	0

If this report displays all zeros or is blank, two possibilities can explain this.

- (1) None of your facilities were flooded. This can be checked by mapping the inventory data on the depth grid.
- (2) The analysis was not run. This can be tested by checking the run box on the Analysis Menu and seeing if a message box asks you to replace the existing results.

### **Induced Flood Damage**

#### **Debris Generation**

Hazus estimates the amount of debris that will be generated by the flood. The model breaks debris into three general categories: 1) Finishes (dry wall, insulation, etc.), 2) Structural (wood, brick, etc.) and 3) Foundations (concrete slab, concrete block, rebar, etc.). This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 329 tons of debris will be generated. Of the total amount, Finishes comprises 40% of the total, Structure comprises 36% of the total. If the debris tonnage is converted into an estimated number of truckloads, it will require 13 truckloads (@25 tons/truck) to remove the debris generated by the flood.

## Social Impact

#### **Shelter Requirements**

Hazus estimates the number of households that are expected to be displaced from their homes due to the flood and the associated potential evacuation. Hazus also estimates those displaced people that will require accommodations in temporary public shelters. The model estimates 14 households will be displaced due to the flood. Displacement includes households evacuated from within or very near to the inundated area. Of these, 25 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

The total economic loss estimated for the flood is 2.83 million dollars, which represents 5.85 % of the total replacement value of the scenario buildings.

### **Building-Related Losses**

The building losses are broken into two categories: direct building losses and business interruption losses. The direct building losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the flood. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the flood.

The total building-related losses were 2.82 million dollars. 0% of the estimated losses were related to the business interruption of the region. The residential occupancies made up 65.09% of the total loss. Table 6 below provides a summary of the losses associated with the building damage.

Table 6: Building-Related Economic Loss Estimates

(Millions of dollars)

Category	Area	Residential	Commercial	Industrial	Others	Total
Building Los	<u>ss</u>					
	Building	1.21	0.27	0.00	0.01	1.49
	Content	0.63	0.65	0.00	0.05	1.33
	Inventory	0.00	0.00	0.00	0.00	0.00
	Subtotal	1.84	0.92	0.00	0.06	2.82
Business In	terruption_					
	Income	0.00	0.00	0.00	0.00	0.00
	Relocation	0.00	0.00	0.00	0.00	0.00
	Rental Income	0.00	0.00	0.00	0.00	0.00
	Wage	0.00	0.00	0.00	0.00	0.00
	Subtotal	0.00	0.00	0.00	0.00	0.01
ALL	Total	1.84	0.92	0.00	0.06	2.83

# **Appendix A: County Listing for the Region**

Connecticut

- Litchfield

# **Appendix B: Regional Population and Building Value Data**

### **Building Value (thousands of dollars)**

	Population	Residential	Non-Residential	Total
Connecticut	]			
Litchfield	3,350	219,576	110,325	329,901
Total	3,350	219,576	110,325	329,901
Total Study Region	3,350	219,576	110,325	329,901

# **Hazus-MH: Flood Event Report**

Region Name:	North Canaan FIT
Negion Name.	North Canaan FII

Flood Scenario: Konkapot River

Print Date: Monday, December 23, 2013

#### Disclaimer:

Totals only reflect data for those census tracts/blocks included in the user's study region.

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social

# **Table of Contents**

Section	on .	Page #
Gener	al Description of the Region	3
Buildi	ng Inventory	4
	General Building Stock	
	Essential Facility Inventory	
Flood	Scenario Parameters	5
Buildi	ng Damage	6
	General Building Stock	
	Essential Facilities Damage	
Induce	ed Flood Damage	8
	Debris Generation	
Social	Impact	8
	Shelter Requirements	
Econo	omic Loss	9
	Building-Related Losses	
Apper	ndix A: County Listing for the Region	10
Apper	ndix B: Regional Population and Building Value Data	11

## General Description of the Region

Hazus is a regional multi-hazard loss estimation model that was developed by the Federal Emergency Management Agency (FEMA) and the National Institute of Building Sciences (NIBS). The primary purpose of Hazus is to provide a methodology and software application to develop multi-hazard losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from multi-hazards and to prepare for emergency response and recovery.

The flood loss estimates provided in this report were based on a region that included 1 county(ies) from the following state(s):

Connecticut

### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19 square miles and contains 85 census blocks. The region contains over 1 thousand households and has a total population of 3,350 people (2000 Census Bureau data). The distribution of population by State and County for the study region is provided in Appendix B.

There are an estimated 1,512 buildings in the region with a total building replacement value (excluding contents) of 330 million dollars (2006 dollars). Approximately 86.31% of the buildings (and 66.56% of the building value) are associated with residential housing.

## **General Building Stock**

Hazus estimates that there are 1,512 buildings in the region which have an aggregate total replacement value of 330 million (2006 dollars). Table 1 and Table 2 present the relative distribution of the value with respect to the general occupancies by Study Region and Scenario respectively. Appendix B provides a general distribution of the building value by State and County.

Table 1
Building Exposure by Occupancy Type for the Study Region

Occupancy	Exposure (\$1000)	Percent of Total
Residential	219,576	66.6%
Commercial	59,176	17.9%
Industrial	35,688	10.8%
Agricultural	5,453	1.7%
Religion	5,118	1.6%
Government	2,723	0.8%
Education	2,167	0.7%
Total	329,901	100.00%

Table 2
Building Exposure by Occupancy Type for the Scenario

Occupancy	Exposure (\$1000)	Percent of Total
Residential	22,531	80.5%
Commercial	3,512	12.5%
Industrial	1,612	5.8%
Agricultural	336	1.2%
Religion	0	0.0%
Government	0	0.0%
Education	0	0.0%
Total	27,991	100.00%

### **Essential Facility Inventory**

For essential facilities, there are no hospitals in the region with a total bed capacity of no beds. There are 1 school, 1 fire station, no police stations and no emergency operation centers.

# Flood Scenario Parameters

Hazus used the following set of information to define the flood parameters for the flood loss estimate provided in this report.

Study Region Name: North Canaan FIT

Scenario Name: Konkapot River

Return Period Analyzed: 100

Analysis Options Analyzed: No What-Ifs

## **General Building Stock Damage**

Hazus estimates that about 2 buildings will be at least moderately damaged. This is over 0% of the total number of buildings in the scenario. There are an estimated 0 buildings that will be completely destroyed. The definition of the 'damage states' is provided in Volume 1: Chapter 5 of the Hazus Flood Technical Manual. Table 3 below summarizes the expected damage by general occupancy for the buildings in the region. Table 4 summarizes the expected damage by general building type.

**Table 3: Expected Building Damage by Occupancy** 

	1-10		11-20 21-30			0	31-4	0	41-50		Substantially	
Occupancy	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Agriculture	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Commercial	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Education	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Government	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Industrial	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Religion	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Residential	0	0.00	0	0.00	0	0.00	1	50.00	1	50.00	0	0.00
Total	0		0		0		1		1		0	

Table 4: Expected Building Damage by Building Type

Building Type	1-10	)	11-20		21-30	)	31-4	31-40		41-50		Substantially	
	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)	
Concrete	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	
ManufHousing	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	
Masonry	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	
Steel	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	
Wood	0	0.00	0	0.00	0	0.00	1	50.00	1	50.00	0	0.00	

## Essential Facility Damage

Before the flood analyzed in this scenario, the region had 0 hospital beds available for use. On the day of the scenario flood event, the model estimates that 0 hospital beds are available in the region.

**Table 5: Expected Damage to Essential Facilities** 

# Facilities

Classification	Total	At Least Moderate	At Least Substantial	Loss of Use
Fire Stations	1	0	0	0
Hospitals	0	0	0	0
Police Stations	0	0	0	0
Schools	1	0	0	0

If this report displays all zeros or is blank, two possibilities can explain this.

- (1) None of your facilities were flooded. This can be checked by mapping the inventory data on the depth grid.
- (2) The analysis was not run. This can be tested by checking the run box on the Analysis Menu and seeing if a message box asks you to replace the existing results.

## **Induced Flood Damage**

### **Debris Generation**

Hazus estimates the amount of debris that will be generated by the flood. The model breaks debris into three general categories: 1) Finishes (dry wall, insulation, etc.), 2) Structural (wood, brick, etc.) and 3) Foundations (concrete slab, concrete block, rebar, etc.). This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 108 tons of debris will be generated. Of the total amount, Finishes comprises 71% of the total, Structure comprises 18% of the total. If the debris tonnage is converted into an estimated number of truckloads, it will require 4 truckloads (@25 tons/truck) to remove the debris generated by the flood.

## **Social Impact**

### **Shelter Requirements**

Hazus estimates the number of households that are expected to be displaced from their homes due to the flood and the associated potential evacuation. Hazus also estimates those displaced people that will require accommodations in temporary public shelters. The model estimates 11 households will be displaced due to the flood. Displacement includes households evacuated from within or very near to the inundated area. Of these, 6 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

The total economic loss estimated for the flood is 1.60 million dollars, which represents 5.70 % of the total replacement value of the scenario buildings.

## **Building-Related Losses**

The building losses are broken into two categories: direct building losses and business interruption losses. The direct building losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the flood. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the flood.

The total building-related losses were 1.60 million dollars. 0% of the estimated losses were related to the business interruption of the region. The residential occupancies made up 78.63% of the total loss. Table 6 below provides a summary of the losses associated with the building damage.

Table 6: Building-Related Economic Loss Estimates

(Millions of dollars)

Category	Area	Residential	Commercial	Industrial	Others	Total
Building Los	<u>ss</u>					
	Building	0.83	0.04	0.05	0.01	0.93
	Content	0.42	0.12	0.07	0.03	0.64
	Inventory	0.00	0.01	0.01	0.00	0.02
	Subtotal	1.26	0.16	0.14	0.04	1.60
Business In	terruption					
	Income	0.00	0.00	0.00	0.00	0.00
	Relocation	0.00	0.00	0.00	0.00	0.00
	Rental Income	0.00	0.00	0.00	0.00	0.00
	Wage	0.00	0.00	0.00	0.00	0.00
	Subtotal	0.00	0.00	0.00	0.00	0.00
ALL	Total	1.26	0.16	0.14	0.04	1.60

# **Appendix A: County Listing for the Region**

Connecticut

Litchfield

## **Appendix B: Regional Population and Building Value Data**

## **Building Value (thousands of dollars)**

	Population	Residential	Non-Residential	Total
Connecticut				
Litchfield	3,350	219,576	110,325	329,901
Total	3,350	219,576	110,325	329,901
Total Study Region	3,350	219,576	110,325	329,901

# **Hazus-MH: Hurricane Event Report**

Region Name: North Canaan

Hurricane Scenario: UN-NAMED-1938-4

Print Date: Tuesday, August 27, 2013

### Disclaimer

Totals only reflect data for those census tracts/blocks included in the user's study region.

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social and economic losses following a specific Hurricane. These results can be improved by using enhanced inventory data.

## **Table of Contents**

Section	Page #
General Description of the Region	3
Building Inventory	4
General Building Stock	
Essential Facility Inventory	
Hurricane Scenario Parameters	5
Building Damage	6
General Building Stock	
Essential Facilities Damage	
Induced Hurricane Damage	8
Debris Generation	
Social Impact	8
Shelter Requirements	
Economic Loss	9
Building Losses	
Appendix A: County Listing for the Region	10
Appendix B: Regional Population and Building Value Data	11

## General Description of the Region

Hazus is a regional multi-hazard loss estimation model that was developed by the Federal Emergency Management Agency and the National Institute of Building Sciences. The primary purpose of Hazus is to provide a methodology and software application to develop multi-hazard losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from multi-hazards and to prepare for emergency response and recovery.

The hurricane loss estimates provided in this report are based on a region that includes 1 county(ies) from the following state(s):

### - Connecticut

### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19.43 square miles and contains 1 census tracts. There are over 1 thousand households in the region and has a total population of 3,350 people (2000 Census Bureau data). The distribution of population by State and County is provided in Appendix B.

There are an estimated 1 thousand buildings in the region with a total building replacement value (excluding contents) of 330 million dollars (2006 dollars). Approximately 86% of the buildings (and 67% of the building value) are associated with residential housing.

# **Building Inventory**

## **General Building Stock**

Hazus estimates that there are 1,512 buildings in the region which have an aggregate total replacement value of 330 million (2006 dollars). Table 1 presents the relative distribution of the value with respect to the general occupancies. Appendix B provides a general distribution of the building value by State and County.

**Table 1: Building Exposure by Occupancy Type** 

Occupancy	Exposure (\$1000)	Percent of Tot
Residential	219,576	66.6%
Commercial	59,176	17.9%
Industrial	35,688	10.8%
Agricultural	5,453	1.7%
Religious	5,118	1.6%
Government	2,723	0.8%
Education	2,167	0.7%
Total	329,901	100.0%

## **Essential Facility Inventory**

For essential facilities, there are no hospitals in the region with a total bed capacity of no beds. There are 1 schools, 1 fire stations, no police stations and no emergency operation facilities.

### Hurricane Scenario

Hazus used the following set of information to define the hurricane parameters for the hurricane loss estimate provided in this report.

Scenario Name: UN-NAMED-1938-4

Type: Historic

Max Peak Gust in Study Region: 95 mph

## **General Building Stock Damage**

Hazus estimates that about 18 buildings will be at least moderately damaged. This is over 1% of the total number of buildings in the region. There are an estimated 0 buildings that will be completely destroyed. The definition of the 'damage states' is provided in Volume 1: Chapter 6 of the Hazus Hurricane technical manual. Table 2 below summarizes the expected damage by general occupancy for the buildings in the region. Table 3 summarizes the expected damage by general building type.

**Table 2: Expected Building Damage by Occupancy** 

	None		Mind	Minor		Moderate		Severe		Destruction	
Occupancy	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)	
Agriculture	18	89.90	2	7.88	0	1.52	0	0.66	0	0.04	
Commercial	110	92.62	7	6.22	1	1.02	0	0.13	0	0.00	
Education	2	94.21	0	5.38	0	0.41	0	0.01	0	0.00	
Government	7	92.90	0	6.41	0	0.67	0	0.01	0	0.00	
Industrial	45	92.59	3	6.30	0	0.94	0	0.17	0	0.01	
Religion	9	92.96	1	6.58	0	0.46	0	0.00	0	0.00	
Residential	1,150	88.14	139	10.66	15	1.16	0	0.02	0	0.02	
Total	1,341		152		17		1		0		

Table 3: Expected Building Damage by Building Type

Building Type	None		Minor		Mode	Moderate		Severe		Destruction	
	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)	
Concrete	10	92.40	1	6.84	0	0.75	0	0.01	0	0.00	
Masonry	103	88.27	10	8.57	3	2.92	0	0.23	0	0.01	
МН	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	
Steel	82	92.71	5	5.87	1	1.22	0	0.20	0	0.00	
Wood	1,061	88.89	124	10.39	8	0.69	0	0.01	0	0.02	

## **Essential Facility Damage**

Before the hurricane, the region had no hospital beds available for use. On the day of the hurricane, the model estimates that 0 hospital beds (0%) are available for use. After one week, none of the beds will be in service. By 30 days, none will be operational.

**Table 4: Expected Damage to Essential Facilities** 

### # Facilities

Classification	Total	Probability of at Least Moderate Damage > 50%	Probability of Complete Damage > 50%	Expected Loss of Use < 1 day
Fire Stations	1	0	0	1
Schools	1	0	0	1

## **Induced Hurricane Damage**

### **Debris Generation**

Hazus estimates the amount of debris that will be generated by the hurricane. The model breaks the debris into four general categories: a) Brick/Wood, b) Reinforced Concrete/Steel, c) Eligible Tree Debris, and d) Other Tree Debris. This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 10,900 tons of debris will be generated. Of the total amount, 9,619 tons (88%) is Other Tree Debris. Of the remaining 1,281 tons, Brick/Wood comprises 26% of the total, Reinforced Concrete/Steel comprises of 0% of the total, with the remainder being Eligible Tree Debris. If the building debris tonnage is converted to an estimated number of truckloads, it will require 13 truckloads (@25 tons/truck) to remove the building debris generated by the hurricane. The number of Eligible Tree Debris truckloads will depend on how the 951 tons of Eligible Tree Debris are collected and processed. The volume of tree debris generally ranges from about 4 cubic yards per ton for chipped or compacted tree debris to about 10 cubic yards per ton for bulkier, uncompacted debris.

## **Social Impact**

### **Shelter Requirement**

Hazus estimates the number of households that are expected to be displaced from their homes due to the hurricane and the number of displaced people that will require accommodations in temporary public shelters. The model estimates 0 households to be displaced due to the hurricane. Of these, 0 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

The total economic loss estimated for the hurricane is 3.3 million dollars, which represents 1.01 % of the total replacement value of the region's buildings.

### **Building-Related Losses**

The building related losses are broken into two categories: direct property damage losses and business interruption losses. The direct property damage losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the hurricane. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the hurricane.

The total property damage losses were 3 million dollars. 2% of the estimated losses were related to the business interruption of the region. By far, the largest loss was sustained by the residential occupancies which made up over 90% of the total loss. Table 4 below provides a summary of the losses associated with the building damage.

Table 5: Building-Related Economic Loss Estimates

(Thousands of dollars)

Category	Area	Residential	Commercial	Industrial	Others	Total
Property Dar	mage_					
	Building	2,186.01	97.32	69.59	42.32	2,395.24
	Content	706.17	14.24	29.01	13.21	762.62
	Inventory	0.00	0.62	5.18	1.45	7.25
	Subtotal	2,892.18	112.17	103.78	56.98	3,165.11
Business Into	erruption Loss Income	0.00	6.19	0.61	2.05	8.85
	Relocation	66.29	11.53	3.15	6.05	87.02
	Rental	45.55	4.80	0.52	0.33	51.20
	Wage	0.00	4.84	1.00	9.77	15.60
	Subtotal	111.85	27.36	5.27	18.20	162.68
<u>Total</u>						
	Total	3,004.02	139.54	109.05	75.18	3,327.79

## **Appendix A: County Listing for the Region**

Connecticut
- Litchfield

## **Appendix B: Regional Population and Building Value Data**

	Population	Residential	Non-Residential	Total
Connecticut				
Litchfield	3,350	219,576	110,325	329,901
Total	3,350	219,576	110,325	329,901
Study Region Total	3,350	219,576	110,325	329,901

# **Hazus-MH: Hurricane Event Report**

Region Name: North Canaan

**Hurricane Scenario:** GLORIA

Print Date: Tuesday, August 27, 2013

### Disclaimer

Totals only reflect data for those census tracts/blocks included in the user's study region.

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social and economic losses following a specific Hurricane. These results can be improved by using enhanced inventory data.

## **Table of Contents**

Sec	ction	Page #
Ger	neral Description of the Region	3
Bui	lding Inventory	4
	General Building Stock	
	Essential Facility Inventory	
Hui	ricane Scenario Parameters	5
Bui	lding Damage	6
	General Building Stock	
	Essential Facilities Damage	
Ind	uced Hurricane Damage	8
	Debris Generation	
Soc	cial Impact	8
	Shelter Requirements	
Eco	onomic Loss	9
	Building Losses	
Арі	pendix A: County Listing for the Region	10
Δηι	pendix B. Regional Population and Building Value Data	11

## General Description of the Region

Hazus is a regional multi-hazard loss estimation model that was developed by the Federal Emergency Management Agency and the National Institute of Building Sciences. The primary purpose of Hazus is to provide a methodology and software application to develop multi-hazard losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from multi-hazards and to prepare for emergency response and recovery.

The hurricane loss estimates provided in this report are based on a region that includes 1 county(ies) from the following state(s):

### - Connecticut

### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19.43 square miles and contains 1 census tracts. There are over 1 thousand households in the region and has a total population of 3,350 people (2000 Census Bureau data). The distribution of population by State and County is provided in Appendix B.

There are an estimated 1 thousand buildings in the region with a total building replacement value (excluding contents) of 330 million dollars (2006 dollars). Approximately 86% of the buildings (and 67% of the building value) are associated with residential housing.

## **Building Inventory**

## **General Building Stock**

Hazus estimates that there are 1,512 buildings in the region which have an aggregate total replacement value of 330 million (2006 dollars). Table 1 presents the relative distribution of the value with respect to the general occupancies. Appendix B provides a general distribution of the building value by State and County.

**Table 1: Building Exposure by Occupancy Type** 

Occupancy	Exposure (\$1000)	Percent of Tot
Residential	219,576	66.6%
Commercial	59,176	17.9%
Industrial	35,688	10.8%
Agricultural	5,453	1.7%
Religious	5,118	1.6%
Government	2,723	0.8%
Education	2,167	0.7%
Total	329,901	100.0%

## **Essential Facility Inventory**

For essential facilities, there are no hospitals in the region with a total bed capacity of no beds. There are 1 schools, 1 fire stations, no police stations and no emergency operation facilities.

### Hurricane Scenario

Hazus used the following set of information to define the hurricane parameters for the hurricane loss estimate provided in this report.

Scenario Name: GLORIA

Type: Historic

Max Peak Gust in Study Region: 54 mph

## **General Building Stock Damage**

Hazus estimates that about 0 buildings will be at least moderately damaged. This is over 0% of the total number of buildings in the region. There are an estimated 0 buildings that will be completely destroyed. The definition of the 'damage states' is provided in Volume 1: Chapter 6 of the Hazus Hurricane technical manual. Table 2 below summarizes the expected damage by general occupancy for the buildings in the region. Table 3 summarizes the expected damage by general building type.

**Table 2: Expected Building Damage by Occupancy** 

	Nor	ie	Mino	r	Moder	ate	Sevei	re	Destructi	on
Occupancy	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Agriculture	20	99.85	0	0.15	0	0.00	0	0.00	0	0.00
Commercial	119	99.79	0	0.21	0	0.00	0	0.00	0	0.00
Education	2	99.78	0	0.22	0	0.00	0	0.00	0	0.00
Government	7	99.75	0	0.25	0	0.00	0	0.00	0	0.00
Industrial	49	99.76	0	0.24	0	0.00	0	0.00	0	0.00
Religion	10	99.83	0	0.17	0	0.00	0	0.00	0	0.00
Residential	1,304	99.95	1	0.05	0	0.00	0	0.00	0	0.00
Total	1,511		1		0		0		0	

Table 3: Expected Building Damage by Building Type

Building	No	ne	Mino	r	Mode	rate	Seve	re	Destruct	ion
Туре	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Concrete	11	99.70	0	0.30	0	0.00	0	0.00	0	0.00
Masonry	117	99.70	0	0.30	0	0.01	0	0.00	0	0.00
МН	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Steel	88	99.75	0	0.25	0	0.00	0	0.00	0	0.00
Wood	1,194	100.00	0	0.00	0	0.00	0	0.00	0	0.00

## **Essential Facility Damage**

Before the hurricane, the region had no hospital beds available for use. On the day of the hurricane, the model estimates that 0 hospital beds (0%) are available for use. After one week, none of the beds will be in service. By 30 days, none will be operational.

**Table 4: Expected Damage to Essential Facilities** 

### # Facilities

Classification	Total	Probability of at Least Moderate Damage > 50%	Probability of Complete Damage > 50%	Expected Loss of Use < 1 day
Fire Stations	1	0	0	1
Schools	1	0	0	1

## **Induced Hurricane Damage**

### **Debris Generation**

Hazus estimates the amount of debris that will be generated by the hurricane. The model breaks the debris into four general categories: a) Brick/Wood, b) Reinforced Concrete/Steel, c) Eligible Tree Debris, and d) Other Tree Debris. This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 228 tons of debris will be generated. Of the total amount, 207 tons (91%) is Other Tree Debris. Of the remaining 21 tons, Brick/Wood comprises 0% of the total, Reinforced Concrete/Steel comprises of 0% of the total, with the remainder being Eligible Tree Debris. If the building debris tonnage is converted to an estimated number of truckloads, it will require 0 truckloads (@25 tons/truck) to remove the building debris generated by the hurricane. The number of Eligible Tree Debris truckloads will depend on how the 21 tons of Eligible Tree Debris are collected and processed. The volume of tree debris generally ranges from about 4 cubic yards per ton for chipped or compacted tree debris to about 10 cubic yards per ton for bulkier, uncompacted debris.

## **Social Impact**

### **Shelter Requirement**

Hazus estimates the number of households that are expected to be displaced from their homes due to the hurricane and the number of displaced people that will require accommodations in temporary public shelters. The model estimates 0 households to be displaced due to the hurricane. Of these, 0 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

## **Economic Loss**

The total economic loss estimated for the hurricane is 0.0 million dollars, which represents 0.01 % of the total replacement value of the region's buildings.

### **Building-Related Losses**

The building related losses are broken into two categories: direct property damage losses and business interruption losses. The direct property damage losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the hurricane. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the hurricane.

The total property damage losses were 0 million dollars. 0% of the estimated losses were related to the business interruption of the region. By far, the largest loss was sustained by the residential occupancies which made up over 100% of the total loss. Table 4 below provides a summary of the losses associated with the building damage.

Table 5: Building-Related Economic Loss Estimates

(Thousands of dollars)

Category	Area	Residential	Commercial	Industrial	Others	Total
Property Da	<u>mage</u>					_
	Building	10.22	0.00	0.00	0.00	10.22
	Content	9.94	0.00	0.00	0.00	9.94
	Inventory	0.00	0.00	0.00	0.00	0.00
	Subtotal	20.16	0.00	0.00	0.00	20.16
Business Int	rerruption Loss Income	0.00	0.00	0.00	0.00	0.00
	Relocation	0.02	0.00	0.00	0.00	0.02
	Rental	0.00	0.00	0.00	0.00	0.00
	Wage	0.00	0.00	0.00	0.00	0.00
	Subtotal	0.02	0.00	0.00	0.00	0.02
<u>Total</u>						
	Total	20.18	0.00	0.00	0.00	20.18

## **Appendix A: County Listing for the Region**

Connecticut
- Litchfield

## **Appendix B: Regional Population and Building Value Data**

Building Value	(thousands	of dollars)
Dullullu value	ttiiousanus	OI GOHAISI

			<u> </u>	<u> </u>
	Population	Residential	Non-Residential	Total
Connecticut				
Litchfield	3,350	219,576	110,325	329,901
Total	3,350	219,576	110,325	329,901
Study Region Total	3,350	219,576	110,325	329,901

# **Hazus-MH: Hurricane Event Report**

Region Name: North Canaan

Hurricane Scenario: Probabilistic 10-year Return Period

Print Date: Tuesday, August 27, 2013

### Disclaimer

Totals only reflect data for those census tracts/blocks included in the user's study region.

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social and economic losses following a specific Hurricane. These results can be improved by using enhanced inventory data.

## **Table of Contents**

Section	Page #
General Description of the Region	3
Building Inventory	4
General Building Stock	
Essential Facility Inventory	
Hurricane Scenario Parameters	5
Building Damage	6
General Building Stock	
Essential Facilities Damage	
Induced Hurricane Damage	8
Debris Generation	
Social Impact	8
Shelter Requirements	
Economic Loss	9
Building Losses	
Appendix A: County Listing for the Region	10
Annendix R: Regional Population and Building Value Data	11

## General Description of the Region

Hazus is a regional multi-hazard loss estimation model that was developed by the Federal Emergency Management Agency and the National Institute of Building Sciences. The primary purpose of Hazus is to provide a methodology and software application to develop multi-hazard losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from multi-hazards and to prepare for emergency response and recovery.

The hurricane loss estimates provided in this report are based on a region that includes 1 county(ies) from the following state(s):

### - Connecticut

### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19.43 square miles and contains 1 census tracts. There are over 1 thousand households in the region and has a total population of 3,350 people (2000 Census Bureau data). The distribution of population by State and County is provided in Appendix B.

There are an estimated 1 thousand buildings in the region with a total building replacement value (excluding contents) of 330 million dollars (2006 dollars). Approximately 86% of the buildings (and 67% of the building value) are associated with residential housing.

# **Building Inventory**

## **General Building Stock**

Hazus estimates that there are 1,512 buildings in the region which have an aggregate total replacement value of 330 million (2006 dollars). Table 1 presents the relative distribution of the value with respect to the general occupancies. Appendix B provides a general distribution of the building value by State and County.

**Table 1: Building Exposure by Occupancy Type** 

Occupancy	Exposure (\$1000)	Percent of Tot	
Residential	219,576	66.6%	
Commercial	59,176	17.9%	
Industrial	35,688	10.8%	
Agricultural	5,453	1.7%	
Religious	5,118	1.6%	
Government	2,723	0.8%	
Education	2,167	0.7%	
Total	329,901	100.0%	

## **Essential Facility Inventory**

For essential facilities, there are no hospitals in the region with a total bed capacity of no beds. There are 1 schools, 1 fire stations, no police stations and no emergency operation facilities.

#### Hurricane Scenario

Hazus used the following set of information to define the hurricane parameters for the hurricane loss estimate provided in this report.

Scenario Name: Probabilistic

Type: Probabilistic

### **General Building Stock Damage**

Hazus estimates that about 0 buildings will be at least moderately damaged. This is over 0% of the total number of buildings in the region. There are an estimated 0 buildings that will be completely destroyed. The definition of the 'damage states' is provided in Volume 1: Chapter 6 of the Hazus Hurricane technical manual. Table 2 below summarizes the expected damage by general occupancy for the buildings in the region. Table 3 summarizes the expected damage by general building type.

Table 2: Expected Building Damage by Occupancy : 10 - year Event

	Noi	1е	Mino	r	Moder	ate	Seve	re	Destruct	ion
Occupancy	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Agriculture	20	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Commercial	119	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Education	2	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Government	7	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Industrial	49	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Religion	10	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Residential	1,305	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Total	1,512		0		0		0		0	

Table 3: Expected Building Damage by Building Type : 10 - year Event

Building	None		Minor		Moderate		Severe		Destruction	
Туре	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Concrete	11	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Masonry	117	100.00	0	0.00	0	0.00	0	0.00	0	0.00
MH	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Steel	88	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Wood	1,194	100.00	0	0.00	0	0.00	0	0.00	0	0.00

### **Essential Facility Damage**

Before the hurricane, the region had no hospital beds available for use. On the day of the hurricane, the model estimates that 0 hospital beds (0%) are available for use. After one week, none of the beds will be in service. By 30 days, none will be operational.

**Table 4: Expected Damage to Essential Facilities** 

#### # Facilities

Classification	Total	Probability of at Least Moderate Damage > 50%	Probability of Complete Damage > 50%	Expected Loss of Use < 1 day
Fire Stations	1	0	0	1
Schools	1	0	0	1

### **Induced Hurricane Damage**

### **Debris Generation**

Hazus estimates the amount of debris that will be generated by the hurricane. The model breaks the debris into four general categories: a) Brick/Wood, b) Reinforced Concrete/Steel, c) Eligible Tree Debris, and d) Other Tree Debris. This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 0 tons of debris will be generated. Of the total amount, 0 tons (0%) is Other Tree Debris. Of the remaining 0 tons, Brick/Wood comprises 0% of the total, Reinforced Concrete/Steel comprises of 0% of the total, with the remainder being Eligible Tree Debris. If the building debris tonnage is converted to an estimated number of truckloads, it will require 0 truckloads (@25 tons/truck) to remove the building debris generated by the hurricane. The number of Eligible Tree Debris truckloads will depend on how the 0 tons of Eligible Tree Debris are collected and processed. The volume of tree debris generally ranges from about 4 cubic yards per ton for chipped or compacted tree debris to about 10 cubic yards per ton for bulkier, uncompacted debris.

### **Social Impact**

#### **Shelter Requirement**

Hazus estimates the number of households that are expected to be displaced from their homes due to the hurricane and the number of displaced people that will require accommodations in temporary public shelters. The model estimates 0 households to be displaced due to the hurricane. Of these, 0 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

### **Economic Loss**

The total economic loss estimated for the hurricane is 0.0 million dollars, which represents 0.00 % of the total replacement value of the region's buildings.

#### **Building-Related Losses**

The building related losses are broken into two categories: direct property damage losses and business interruption losses. The direct property damage losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the hurricane. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the hurricane.

The total property damage losses were 0 million dollars. 0% of the estimated losses were related to the business interruption of the region. By far, the largest loss was sustained by the residential occupancies which made up over 0% of the total loss. Table 4 below provides a summary of the losses associated with the building damage.

Table 5: Building-Related Economic Loss Estimates

(Thousands of dollars)

Category	Area	Residential	Commercial	Industrial	Others	Total
Property Da	mage_					
	Building	0.00	0.00	0.00	0.00	0.00
	Content	0.00	0.00	0.00	0.00	0.00
	Inventory	0.00	0.00	0.00	0.00	0.00
	Subtotal	0.00	0.00	0.00	0.00	0.00
Business Int	terruption Loss Income	0.00	0.00	0.00	0.00	0.00
	Relocation	0.00	0.00	0.00	0.00	0.00
	Rental	0.00	0.00	0.00	0.00	0.00
	Wage	0.00	0.00	0.00	0.00	0.00
	Subtotal	0.00	0.00	0.00	0.00	0.00
<u>Total</u>						
	Total	0.00	0.00	0.00	0.00	0.00

### **Appendix A: County Listing for the Region**

Connecticut
- Litchfield

### **Appendix B: Regional Population and Building Value Data**

	Population	Residential	Non-Residential	Total
Connecticut				
Litchfield	3,350	219,576	110,325	329,901
Total	3,350	219,576	110,325	329,901
Study Region Total	3,350	219,576	110,325	329,901

# **Hazus-MH: Hurricane Event Report**

Region Name: North Canaan

Hurricane Scenario: Probabilistic 20-year Return Period

Print Date: Tuesday, August 27, 2013

#### Disclaimer

Totals only reflect data for those census tracts/blocks included in the user's study region.

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social and economic losses following a specific Hurricane. These results can be improved by using enhanced inventory data.

### **Table of Contents**

Sec	ction	Page #
Ger	neral Description of the Region	3
Bui	lding Inventory	4
	General Building Stock	
	Essential Facility Inventory	
Hui	ricane Scenario Parameters	5
Bui	lding Damage	6
	General Building Stock	
	Essential Facilities Damage	
Ind	uced Hurricane Damage	8
	Debris Generation	
Soc	cial Impact	8
	Shelter Requirements	
Eco	onomic Loss	9
	Building Losses	
Арі	pendix A: County Listing for the Region	10
Δηι	pendix B. Regional Population and Building Value Data	11

### General Description of the Region

Hazus is a regional multi-hazard loss estimation model that was developed by the Federal Emergency Management Agency and the National Institute of Building Sciences. The primary purpose of Hazus is to provide a methodology and software application to develop multi-hazard losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from multi-hazards and to prepare for emergency response and recovery.

The hurricane loss estimates provided in this report are based on a region that includes 1 county(ies) from the following state(s):

#### - Connecticut

#### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19.43 square miles and contains 1 census tracts. There are over 1 thousand households in the region and has a total population of 3,350 people (2000 Census Bureau data). The distribution of population by State and County is provided in Appendix B.

There are an estimated 1 thousand buildings in the region with a total building replacement value (excluding contents) of 330 million dollars (2006 dollars). Approximately 86% of the buildings (and 67% of the building value) are associated with residential housing.

## **Building Inventory**

### **General Building Stock**

Hazus estimates that there are 1,512 buildings in the region which have an aggregate total replacement value of 330 million (2006 dollars). Table 1 presents the relative distribution of the value with respect to the general occupancies. Appendix B provides a general distribution of the building value by State and County.

**Table 1: Building Exposure by Occupancy Type** 

Occupancy	Exposure (\$1000)	Percent of Tot
Residential	219,576	66.6%
Commercial	59,176	17.9%
Industrial	35,688	10.8%
Agricultural	5,453	1.7%
Religious	5,118	1.6%
Government	2,723	0.8%
Education	2,167	0.7%
Total	329.901	100.0%

### **Essential Facility Inventory**

For essential facilities, there are no hospitals in the region with a total bed capacity of no beds. There are 1 schools, 1 fire stations, no police stations and no emergency operation facilities.

#### Hurricane Scenario

Hazus used the following set of information to define the hurricane parameters for the hurricane loss estimate provided in this report.

Scenario Name: Probabilistic

Type: Probabilistic

### **General Building Stock Damage**

Hazus estimates that about 0 buildings will be at least moderately damaged. This is over 0% of the total number of buildings in the region. There are an estimated 0 buildings that will be completely destroyed. The definition of the 'damage states' is provided in Volume 1: Chapter 6 of the Hazus Hurricane technical manual. Table 2 below summarizes the expected damage by general occupancy for the buildings in the region. Table 3 summarizes the expected damage by general building type.

Table 2: Expected Building Damage by Occupancy : 20 - year Event

	Noi	1е	Mino	r	Moder	ate	Seve	re	Destruct	ion
Occupancy	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Agriculture	20	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Commercial	119	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Education	2	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Government	7	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Industrial	49	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Religion	10	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Residential	1,305	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Total	1,512		0		0		0		0	

Table 3: Expected Building Damage by Building Type : 20 - year Event

Building	None		Minor		Moderate		Severe		Destruction	
Туре	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Concrete	11	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Masonry	117	100.00	0	0.00	0	0.00	0	0.00	0	0.00
МН	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Steel	88	100.00	0	0.00	0	0.00	0	0.00	0	0.00
Wood	1,194	100.00	0	0.00	0	0.00	0	0.00	0	0.00

### **Essential Facility Damage**

Before the hurricane, the region had no hospital beds available for use. On the day of the hurricane, the model estimates that 0 hospital beds (0%) are available for use. After one week, none of the beds will be in service. By 30 days, none will be operational.

**Table 4: Expected Damage to Essential Facilities** 

#### # Facilities

Classification	Total	Probability of at Least Moderate Damage > 50%	Probability of Complete Damage > 50%	Expected Loss of Use < 1 day
Fire Stations	1	0	0	1
Schools	1	0	0	1

### **Induced Hurricane Damage**

#### **Debris Generation**

Hazus estimates the amount of debris that will be generated by the hurricane. The model breaks the debris into four general categories: a) Brick/Wood, b) Reinforced Concrete/Steel, c) Eligible Tree Debris, and d) Other Tree Debris. This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 0 tons of debris will be generated. Of the total amount, 0 tons (0%) is Other Tree Debris. Of the remaining 0 tons, Brick/Wood comprises 0% of the total, Reinforced Concrete/Steel comprises of 0% of the total, with the remainder being Eligible Tree Debris. If the building debris tonnage is converted to an estimated number of truckloads, it will require 0 truckloads (@25 tons/truck) to remove the building debris generated by the hurricane. The number of Eligible Tree Debris truckloads will depend on how the 0 tons of Eligible Tree Debris are collected and processed. The volume of tree debris generally ranges from about 4 cubic yards per ton for chipped or compacted tree debris to about 10 cubic yards per ton for bulkier, uncompacted debris.

### **Social Impact**

#### **Shelter Requirement**

Hazus estimates the number of households that are expected to be displaced from their homes due to the hurricane and the number of displaced people that will require accommodations in temporary public shelters. The model estimates 0 households to be displaced due to the hurricane. Of these, 0 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

### **Economic Loss**

The total economic loss estimated for the hurricane is 0.0 million dollars, which represents 0.00 % of the total replacement value of the region's buildings.

#### **Building-Related Losses**

The building related losses are broken into two categories: direct property damage losses and business interruption losses. The direct property damage losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the hurricane. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the hurricane.

The total property damage losses were 0 million dollars. 0% of the estimated losses were related to the business interruption of the region. By far, the largest loss was sustained by the residential occupancies which made up over 0% of the total loss. Table 4 below provides a summary of the losses associated with the building damage.

Table 5: Building-Related Economic Loss Estimates

(Thousands of dollars)

Category	Area	Residential	Commercial	Industrial	Others	Total
Property Da	mage_					
	Building	0.00	0.00	0.00	0.00	0.00
	Content	0.00	0.00	0.00	0.00	0.00
	Inventory	0.00	0.00	0.00	0.00	0.00
	Subtotal	0.00	0.00	0.00	0.00	0.00
Business Int	terruption Loss Income	0.00	0.00	0.00	0.00	0.00
	Relocation	0.00	0.00	0.00	0.00	0.00
	Rental	0.00	0.00	0.00	0.00	0.00
	Wage	0.00	0.00	0.00	0.00	0.00
	Subtotal	0.00	0.00	0.00	0.00	0.00
<u>Total</u>						
	Total	0.00	0.00	0.00	0.00	0.00

### **Appendix A: County Listing for the Region**

Connecticut
- Litchfield

### **Appendix B: Regional Population and Building Value Data**

	Population	Residential	Non-Residential	Total		
Connecticut						
Litchfield	3,350	219,576	110,325	329,901		
Total	3,350	219,576	110,325	329,901		
Study Region Total	3,350	219,576	110,325	329,901		

# **Hazus-MH: Hurricane Event Report**

Region Name: North Canaan

Hurricane Scenario: Probabilistic 50-year Return Period

Print Date: Tuesday, August 27, 2013

#### Disclaimer

Totals only reflect data for those census tracts/blocks included in the user's study region.

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social and economic losses following a specific Hurricane. These results can be improved by using enhanced inventory data.

### **Table of Contents**

Section	Page #
General Description of the Region	3
Building Inventory	4
General Building Stock	
Essential Facility Inventory	
Hurricane Scenario Parameters	5
Building Damage	6
General Building Stock	
Essential Facilities Damage	
Induced Hurricane Damage	8
Debris Generation	
Social Impact	8
Shelter Requirements	
Economic Loss	9
Building Losses	
Appendix A: County Listing for the Region	10
Appendix B: Regional Population and Building Value Data	11

### General Description of the Region

Hazus is a regional multi-hazard loss estimation model that was developed by the Federal Emergency Management Agency and the National Institute of Building Sciences. The primary purpose of Hazus is to provide a methodology and software application to develop multi-hazard losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from multi-hazards and to prepare for emergency response and recovery.

The hurricane loss estimates provided in this report are based on a region that includes 1 county(ies) from the following state(s):

#### - Connecticut

#### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19.43 square miles and contains 1 census tracts. There are over 1 thousand households in the region and has a total population of 3,350 people (2000 Census Bureau data). The distribution of population by State and County is provided in Appendix B.

There are an estimated 1 thousand buildings in the region with a total building replacement value (excluding contents) of 330 million dollars (2006 dollars). Approximately 86% of the buildings (and 67% of the building value) are associated with residential housing.

## **Building Inventory**

### **General Building Stock**

Hazus estimates that there are 1,512 buildings in the region which have an aggregate total replacement value of 330 million (2006 dollars). Table 1 presents the relative distribution of the value with respect to the general occupancies. Appendix B provides a general distribution of the building value by State and County.

**Table 1: Building Exposure by Occupancy Type** 

Occupancy	Exposure (\$1000)	Percent of Tot
Residential	219,576	66.6%
Commercial	59,176	17.9%
Industrial	35,688	10.8%
Agricultural	5,453	1.7%
Religious	5,118	1.6%
Government	2,723	0.8%
Education	2,167	0.7%
Total	329,901	100.0%

### **Essential Facility Inventory**

For essential facilities, there are no hospitals in the region with a total bed capacity of no beds. There are 1 schools, 1 fire stations, no police stations and no emergency operation facilities.

#### Hurricane Scenario

Hazus used the following set of information to define the hurricane parameters for the hurricane loss estimate provided in this report.

Scenario Name: Probabilistic

Type: Probabilistic

### **General Building Stock Damage**

Hazus estimates that about 0 buildings will be at least moderately damaged. This is over 0% of the total number of buildings in the region. There are an estimated 0 buildings that will be completely destroyed. The definition of the 'damage states' is provided in Volume 1: Chapter 6 of the Hazus Hurricane technical manual. Table 2 below summarizes the expected damage by general occupancy for the buildings in the region. Table 3 summarizes the expected damage by general building type.

Table 2: Expected Building Damage by Occupancy : 50 - year Event

	Nor	ie	Mino	r	Moder	ate	Seve	re	Destructi	on
Occupancy	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Agriculture	20	99.76	0	0.24	0	0.00	0	0.00	0	0.00
Commercial	119	99.69	0	0.31	0	0.00	0	0.00	0	0.00
Education	2	99.68	0	0.33	0	0.00	0	0.00	0	0.00
Government	7	99.63	0	0.37	0	0.00	0	0.00	0	0.00
Industrial	49	99.64	0	0.36	0	0.00	0	0.00	0	0.00
Religion	10	99.76	0	0.24	0	0.00	0	0.00	0	0.00
Residential	1,304	99.89	1	0.11	0	0.00	0	0.00	0	0.00
Total	1,510		2		0		0		0	

Table 3: Expected Building Damage by Building Type : 50 - year Event

Building	Nor	ne	Mino	r	Mode	rate	Seve	re	Destruc	tion
Туре	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Concrete	11	99.55	0	0.45	0	0.00	0	0.00	0	0.00
Masonry	116	99.48	1	0.50	0	0.02	0	0.00	0	0.00
МН	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Steel	88	99.63	0	0.37	0	0.00	0	0.00	0	0.00
Wood	1,194	99.97	0	0.03	0	0.00	0	0.00	0	0.00

### **Essential Facility Damage**

Before the hurricane, the region had no hospital beds available for use. On the day of the hurricane, the model estimates that 0 hospital beds (0%) are available for use. After one week, none of the beds will be in service. By 30 days, none will be operational.

**Table 4: Expected Damage to Essential Facilities** 

#### # Facilities

Classification Total		Probability of at Least Moderate Damage > 50%	Probability of Complete Damage > 50%	Expected Loss of Use < 1 day	
Fire Stations	1	0	0	1	
Schools	1	0	0	1	

### Induced Hurricane Damage

#### **Debris Generation**

Hazus estimates the amount of debris that will be generated by the hurricane. The model breaks the debris into four general categories: a) Brick/Wood, b) Reinforced Concrete/Steel, c) Eligible Tree Debris, and d) Other Tree Debris. This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 558 tons of debris will be generated. Of the total amount, 508 tons (91%) is Other Tree Debris. Of the remaining 50 tons, Brick/Wood comprises 0% of the total, Reinforced Concrete/Steel comprises of 0% of the total, with the remainder being Eligible Tree Debris. If the building debris tonnage is converted to an estimated number of truckloads, it will require 0 truckloads (@25 tons/truck) to remove the building debris generated by the hurricane. The number of Eligible Tree Debris truckloads will depend on how the 50 tons of Eligible Tree Debris are collected and processed. The volume of tree debris generally ranges from about 4 cubic yards per ton for chipped or compacted tree debris to about 10 cubic yards per ton for bulkier, uncompacted debris.

### **Social Impact**

#### **Shelter Requirement**

Hazus estimates the number of households that are expected to be displaced from their homes due to the hurricane and the number of displaced people that will require accommodations in temporary public shelters. The model estimates 0 households to be displaced due to the hurricane. Of these, 0 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

The total economic loss estimated for the hurricane is 0.2 million dollars, which represents 0.05 % of the total replacement value of the region's buildings.

#### **Building-Related Losses**

The building related losses are broken into two categories: direct property damage losses and business interruption losses. The direct property damage losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the hurricane. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the hurricane.

The total property damage losses were 0 million dollars. 1% of the estimated losses were related to the business interruption of the region. By far, the largest loss was sustained by the residential occupancies which made up over 94% of the total loss. Table 4 below provides a summary of the losses associated with the building damage.

Table 5: Building-Related Economic Loss Estimates

(Thousands of dollars)

Category	Area	Residential	Commercial	Industrial	Others	Total
Property Dai	mage_					
	Building	110.07	5.92	3.57	1.00	120.55
	Content	45.23	0.00	0.00	0.00	45.23
	Inventory	0.00	0.00	0.00	0.00	0.00
	Subtotal	155.30	5.92	3.57	1.00	165.79
Business Int	erruption Loss	0.00	0.00	0.00	0.00	0.00
	Relocation	0.05	0.00	0.00	0.00	0.05
	Rental	0.00	0.00	0.00	0.00	0.00
	Wage	0.00	0.00	0.00	0.00	0.00
	Subtotal	0.05	0.00	0.00	0.00	0.05
<u>Total</u>						
	Total	155.35	5.92	3.57	1.00	165.84

### **Appendix A: County Listing for the Region**

Connecticut
- Litchfield

### **Appendix B: Regional Population and Building Value Data**

	Population	Residential	Non-Residential	Total		
Connecticut						
Litchfield	3,350	219,576	110,325	329,901		
Total	3,350	219,576	110,325	329,901		
Study Region Total	3,350	219,576	110,325	329,901		

# **Hazus-MH: Hurricane Event Report**

Region Name: North Canaan

Hurricane Scenario: Probabilistic 100-year Return Period

Print Date: Tuesday, August 27, 2013

#### Disclaimer

Totals only reflect data for those census tracts/blocks included in the user's study region.

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social and economic losses following a specific Hurricane. These results can be improved by using enhanced inventory data.

### **Table of Contents**

Section		Page #
General Descri	otion of the Region	3
Building Invent	ory	4
Gener	al Building Stock	
Essen	tial Facility Inventory	
Hurricane Scen	ario Parameters	5
Building Dama	ge	6
Gener	al Building Stock	
Essen	tial Facilities Damage	
Induced Hurrica	ane Damage	8
Debris	s Generation	
Social Impact		8
Shelte	er Requirements	
Economic Loss		9
Buildi	ng Losses	
Appendix A: Co	ounty Listing for the Region	10
Appendix B: Re	egional Population and Building Value Data	11

### General Description of the Region

Hazus is a regional multi-hazard loss estimation model that was developed by the Federal Emergency Management Agency and the National Institute of Building Sciences. The primary purpose of Hazus is to provide a methodology and software application to develop multi-hazard losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from multi-hazards and to prepare for emergency response and recovery.

The hurricane loss estimates provided in this report are based on a region that includes 1 county(ies) from the following state(s):

#### - Connecticut

#### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19.43 square miles and contains 1 census tracts. There are over 1 thousand households in the region and has a total population of 3,350 people (2000 Census Bureau data). The distribution of population by State and County is provided in Appendix B.

There are an estimated 1 thousand buildings in the region with a total building replacement value (excluding contents) of 330 million dollars (2006 dollars). Approximately 86% of the buildings (and 67% of the building value) are associated with residential housing.

## **Building Inventory**

### **General Building Stock**

Hazus estimates that there are 1,512 buildings in the region which have an aggregate total replacement value of 330 million (2006 dollars). Table 1 presents the relative distribution of the value with respect to the general occupancies. Appendix B provides a general distribution of the building value by State and County.

**Table 1: Building Exposure by Occupancy Type** 

Occupancy	Exposure (\$1000)	Percent of Tot
Residential	219,576	66.6%
Commercial	59,176	17.9%
Industrial	35,688	10.8%
Agricultural	5,453	1.7%
Religious	5,118	1.6%
Government	2,723	0.8%
Education	2,167	0.7%
Total	329,901	100.0%

### **Essential Facility Inventory**

For essential facilities, there are no hospitals in the region with a total bed capacity of no beds. There are 1 schools, 1 fire stations, no police stations and no emergency operation facilities.

#### Hurricane Scenario

Hazus used the following set of information to define the hurricane parameters for the hurricane loss estimate provided in this report.

Scenario Name: Probabilistic

Type: Probabilistic

### **General Building Stock Damage**

Hazus estimates that about 1 buildings will be at least moderately damaged. This is over 0% of the total number of buildings in the region. There are an estimated 0 buildings that will be completely destroyed. The definition of the 'damage states' is provided in Volume 1: Chapter 6 of the Hazus Hurricane technical manual. Table 2 below summarizes the expected damage by general occupancy for the buildings in the region. Table 3 summarizes the expected damage by general building type.

Table 2: Expected Building Damage by Occupancy : 100 - year Event

	Non	ie	Mino	r	Moder	ate	Sevei	re	Destructi	on
Occupancy	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Agriculture	20	99.16	0	0.79	0	0.04	0	0.01	0	0.00
Commercial	118	99.17	1	0.80	0	0.03	0	0.00	0	0.00
Education	2	99.23	0	0.77	0	0.00	0	0.00	0	0.00
Government	7	99.10	0	0.90	0	0.00	0	0.00	0	0.00
Industrial	49	99.09	0	0.90	0	0.01	0	0.00	0	0.00
Religion	10	99.34	0	0.66	0	0.00	0	0.00	0	0.00
Residential	1,293	99.12	11	0.84	1	0.04	0	0.00	0	0.00
Total	1,499		13		1		0		0	

Table 3: Expected Building Damage by Building Type : 100 - year Event

Building Type	None		Minor		Moderate		Severe		Destruction	
	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Concrete	11	98.87	0	1.13	0	0.01	0	0.00	0	0.00
Masonry	115	98.34	2	1.48	0	0.17	0	0.01	0	0.00
MH	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Steel	87	99.05	1	0.91	0	0.03	0	0.00	0	0.00
Wood	1,186	99.36	8	0.64	0	0.01	0	0.00	0	0.00

### **Essential Facility Damage**

Before the hurricane, the region had no hospital beds available for use. On the day of the hurricane, the model estimates that 0 hospital beds (0%) are available for use. After one week, none of the beds will be in service. By 30 days, none will be operational.

**Table 4: Expected Damage to Essential Facilities** 

#### # Facilities

Classification	Total	Probability of at Least Moderate Damage > 50%	Probability of Complete Damage > 50%	Expected Loss of Use < 1 day	
Fire Stations	1	0	0	1	
Schools	1	0	0	1	

# **Induced Hurricane Damage**

### **Debris Generation**

Hazus estimates the amount of debris that will be generated by the hurricane. The model breaks the debris into four general categories: a) Brick/Wood, b) Reinforced Concrete/Steel, c) Eligible Tree Debris, and d) Other Tree Debris. This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 1,691 tons of debris will be generated. Of the total amount, 1,508 tons (89%) is Other Tree Debris. Of the remaining 183 tons, Brick/Wood comprises 19% of the total, Reinforced Concrete/Steel comprises of 0% of the total, with the remainder being Eligible Tree Debris. If the building debris tonnage is converted to an estimated number of truckloads, it will require 1 truckloads (@25 tons/truck) to remove the building debris generated by the hurricane. The number of Eligible Tree Debris truckloads will depend on how the 149 tons of Eligible Tree Debris are collected and processed. The volume of tree debris generally ranges from about 4 cubic yards per ton for chipped or compacted tree debris to about 10 cubic yards per ton for bulkier, uncompacted debris.

### **Social Impact**

#### **Shelter Requirement**

Hazus estimates the number of households that are expected to be displaced from their homes due to the hurricane and the number of displaced people that will require accommodations in temporary public shelters. The model estimates 0 households to be displaced due to the hurricane. Of these, 0 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

The total economic loss estimated for the hurricane is 0.6 million dollars, which represents 0.19 % of the total replacement value of the region's buildings.

### **Building-Related Losses**

The building related losses are broken into two categories: direct property damage losses and business interruption losses. The direct property damage losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the hurricane. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the hurricane.

The total property damage losses were 1 million dollars. 0% of the estimated losses were related to the business interruption of the region. By far, the largest loss was sustained by the residential occupancies which made up over 98% of the total loss. Table 4 below provides a summary of the losses associated with the building damage.

Table 5: Building-Related Economic Loss Estimates

(Thousands of dollars)

Category	Area	Residential	Commercial	Industrial	Others	Total
Property Da	<u>mage</u>					
	Building	449.28	7.05	4.16	1.78	462.27
	Content	161.43	0.00	0.00	0.00	161.43
	Inventory	0.00	0.00	0.00	0.00	0.00
	Subtotal	610.71	7.05	4.16	1.78	623.69
Business Int	erruption Loss Income	0.00	0.00	0.00	0.00	0.00
	Relocation	1.78	0.16	0.00	0.03	1.97
	Rental	1.73	0.00	0.00	0.00	1.73
	Wage	0.00	0.00	0.00	0.00	0.00
	Subtotal	3.51	0.16	0.00	0.03	3.70
<u>Total</u>						
	Total	614.21	7.21	4.16	1.80	627.39

# **Appendix A: County Listing for the Region**

Connecticut
- Litchfield

# **Appendix B: Regional Population and Building Value Data**

Duilding	Malua	/4h a a a m al a	of dollors)
Bullaina	value	(thousands	ot dollars)

	_		<u> </u>	
	Population	Residential	Non-Residential	Total
Connecticut				
Litchfield	3,350	219,576	110,325	329,901
Total	3,350	219,576	110,325	329,901
Study Region Total	3,350	219,576	110,325	329,901

# **Hazus-MH: Hurricane Event Report**

Region Name: North Canaan

Hurricane Scenario: Probabilistic 200-year Return Period

Print Date: Tuesday, August 27, 2013

#### Disclaimer

Totals only reflect data for those census tracts/blocks included in the user's study region.

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social and economic losses following a specific Hurricane. These results can be improved by using enhanced inventory data.

# **Table of Contents**

Sec	ction	Page #
Ger	neral Description of the Region	3
Bui	lding Inventory	4
	General Building Stock	
	Essential Facility Inventory	
Hui	ricane Scenario Parameters	5
Bui	lding Damage	6
	General Building Stock	
	Essential Facilities Damage	
Ind	uced Hurricane Damage	8
	Debris Generation	
Soc	cial Impact	8
	Shelter Requirements	
Eco	onomic Loss	9
	Building Losses	
Арі	pendix A: County Listing for the Region	10
Δηι	pendix B. Regional Population and Building Value Data	11

# General Description of the Region

Hazus is a regional multi-hazard loss estimation model that was developed by the Federal Emergency Management Agency and the National Institute of Building Sciences. The primary purpose of Hazus is to provide a methodology and software application to develop multi-hazard losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from multi-hazards and to prepare for emergency response and recovery.

The hurricane loss estimates provided in this report are based on a region that includes 1 county(ies) from the following state(s):

#### - Connecticut

#### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19.43 square miles and contains 1 census tracts. There are over 1 thousand households in the region and has a total population of 3,350 people (2000 Census Bureau data). The distribution of population by State and County is provided in Appendix B.

There are an estimated 1 thousand buildings in the region with a total building replacement value (excluding contents) of 330 million dollars (2006 dollars). Approximately 86% of the buildings (and 67% of the building value) are associated with residential housing.

# **Building Inventory**

### **General Building Stock**

Hazus estimates that there are 1,512 buildings in the region which have an aggregate total replacement value of 330 million (2006 dollars). Table 1 presents the relative distribution of the value with respect to the general occupancies. Appendix B provides a general distribution of the building value by State and County.

**Table 1: Building Exposure by Occupancy Type** 

Occupancy	Exposure (\$1000)	Percent of Tot
Residential	219,576	66.6%
Commercial	59,176	17.9%
Industrial	35,688	10.8%
Agricultural	5,453	1.7%
Religious	5,118	1.6%
Government	2,723	0.8%
Education	2,167	0.7%
Total	329,901	100.0%

### **Essential Facility Inventory**

For essential facilities, there are no hospitals in the region with a total bed capacity of no beds. There are 1 schools, 1 fire stations, no police stations and no emergency operation facilities.

#### Hurricane Scenario

Hazus used the following set of information to define the hurricane parameters for the hurricane loss estimate provided in this report.

Scenario Name: Probabilistic

Type: Probabilistic

### **General Building Stock Damage**

Hazus estimates that about 4 buildings will be at least moderately damaged. This is over 0% of the total number of buildings in the region. There are an estimated 0 buildings that will be completely destroyed. The definition of the 'damage states' is provided in Volume 1: Chapter 6 of the Hazus Hurricane technical manual. Table 2 below summarizes the expected damage by general occupancy for the buildings in the region. Table 3 summarizes the expected damage by general building type.

Table 2: Expected Building Damage by Occupancy : 200 - year Event

	Non	ie	Mino	r	Moder	ate	Seve	re	Destructi	on
Occupancy	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Agriculture	19	96.66	1	2.84	0	0.36	0	0.13	0	0.00
Commercial	116	97.43	3	2.31	0	0.23	0	0.02	0	0.00
Education	2	97.90	0	2.05	0	0.06	0	0.00	0	0.00
Government	7	97.48	0	2.44	0	0.08	0	0.00	0	0.00
Industrial	48	97.35	1	2.47	0	0.15	0	0.03	0	0.00
Religion	10	97.72	0	2.23	0	0.05	0	0.00	0	0.00
Residential	1,251	95.84	51	3.88	4	0.28	0	0.00	0	0.00
Total	1,452		56		4		0		0	

Table 3: Expected Building Damage by Building Type : 200 - year Event

Building	Nor	ne	Mino	or	Mode	rate	Seve	re	Destruct	ion
Туре	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Concrete	11	97.07	0	2.83	0	0.10	0	0.00	0	0.00
Masonry	111	95.14	5	3.89	1	0.91	0	0.05	0	0.00
MH	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Steel	86	97.34	2	2.35	0	0.28	0	0.03	0	0.00
Wood	1,150	96.33	42	3.55	1	0.12	0	0.00	0	0.00

# **Essential Facility Damage**

Before the hurricane, the region had no hospital beds available for use. On the day of the hurricane, the model estimates that 0 hospital beds (0%) are available for use. After one week, none of the beds will be in service. By 30 days, none will be operational.

**Table 4: Expected Damage to Essential Facilities** 

#### # Facilities

Classification	Total	Probability of at Least Moderate Damage > 50%	Probability of Complete Damage > 50%	Expected Loss of Use < 1 day
Fire Stations	1	0	0	1
Schools	1	0	0	1

# **Induced Hurricane Damage**

#### **Debris Generation**

Hazus estimates the amount of debris that will be generated by the hurricane. The model breaks the debris into four general categories: a) Brick/Wood, b) Reinforced Concrete/Steel, c) Eligible Tree Debris, and d) Other Tree Debris. This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 7,145 tons of debris will be generated. Of the total amount, 6,383 tons (89%) is Other Tree Debris. Of the remaining 762 tons, Brick/Wood comprises 17% of the total, Reinforced Concrete/Steel comprises of 0% of the total, with the remainder being Eligible Tree Debris. If the building debris tonnage is converted to an estimated number of truckloads, it will require 5 truckloads (@25 tons/truck) to remove the building debris generated by the hurricane. The number of Eligible Tree Debris truckloads will depend on how the 631 tons of Eligible Tree Debris are collected and processed. The volume of tree debris generally ranges from about 4 cubic yards per ton for chipped or compacted tree debris to about 10 cubic yards per ton for bulkier, uncompacted debris.

### **Social Impact**

#### **Shelter Requirement**

Hazus estimates the number of households that are expected to be displaced from their homes due to the hurricane and the number of displaced people that will require accommodations in temporary public shelters. The model estimates 0 households to be displaced due to the hurricane. Of these, 0 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

The total economic loss estimated for the hurricane is 1.6 million dollars, which represents 0.48 % of the total replacement value of the region's buildings.

### **Building-Related Losses**

The building related losses are broken into two categories: direct property damage losses and business interruption losses. The direct property damage losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the hurricane. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the hurricane.

The total property damage losses were 2 million dollars. 1% of the estimated losses were related to the business interruption of the region. By far, the largest loss was sustained by the residential occupancies which made up over 95% of the total loss. Table 4 below provides a summary of the losses associated with the building damage.

Table 5: Building-Related Economic Loss Estimates

(Thousands of dollars)

Category	Area	Residential	Commercial	Industrial	Others	Total
Property Da	mage_					
	Building	1,095.96	32.08	20.60	11.24	1,159.88
	Content	359.10	1.01	3.52	1.89	365.51
	Inventory	0.00	0.08	0.72	0.23	1.03
	Subtotal	1,455.06	33.16	24.83	13.36	1,526.42
Business int	erruption Loss Income	0.00	0.00	0.00	0.00	0.00
	Relocation	30.56	1.29	0.21	0.31	32.37
	Rental	17.13	0.00	0.00	0.00	17.13
	Wage	0.00	0.00	0.00	0.00	0.00
	Subtotal	47.70	1.29	0.21	0.31	49.50
<u>Total</u>						
	Total	1,502.76	34.45	25.04	13.67	1,575.92

# **Appendix A: County Listing for the Region**

Connecticut
- Litchfield

# **Appendix B: Regional Population and Building Value Data**

	Population	Residential	Non-Residential	Total
Connecticut				
Litchfield	3,350	219,576	110,325	329,901
Total	3,350	219,576	110,325	329,901
Study Region Total	3,350	219,576	110,325	329,901

# **Hazus-MH: Hurricane Event Report**

Region Name: North Canaan

Hurricane Scenario: Probabilistic 500-year Return Period

Print Date: Tuesday, August 27, 2013

#### Disclaimer

Totals only reflect data for those census tracts/blocks included in the user's study region.

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social and economic losses following a specific Hurricane. These results can be improved by using enhanced inventory data.

# **Table of Contents**

Section	Page #
General Description of the Region	3
Building Inventory	4
General Building Stock	
Essential Facility Inventory	
Hurricane Scenario Parameters	5
Building Damage	6
General Building Stock	
Essential Facilities Damage	
Induced Hurricane Damage	8
Debris Generation	
Social Impact	8
Shelter Requirements	
Economic Loss	9
Building Losses	
Appendix A: County Listing for the Region	10
Appendix B: Regional Population and Building Value Data	11

# General Description of the Region

Hazus is a regional multi-hazard loss estimation model that was developed by the Federal Emergency Management Agency and the National Institute of Building Sciences. The primary purpose of Hazus is to provide a methodology and software application to develop multi-hazard losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from multi-hazards and to prepare for emergency response and recovery.

The hurricane loss estimates provided in this report are based on a region that includes 1 county(ies) from the following state(s):

#### - Connecticut

#### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19.43 square miles and contains 1 census tracts. There are over 1 thousand households in the region and has a total population of 3,350 people (2000 Census Bureau data). The distribution of population by State and County is provided in Appendix B.

There are an estimated 1 thousand buildings in the region with a total building replacement value (excluding contents) of 330 million dollars (2006 dollars). Approximately 86% of the buildings (and 67% of the building value) are associated with residential housing.

# **Building Inventory**

### **General Building Stock**

Hazus estimates that there are 1,512 buildings in the region which have an aggregate total replacement value of 330 million (2006 dollars). Table 1 presents the relative distribution of the value with respect to the general occupancies. Appendix B provides a general distribution of the building value by State and County.

**Table 1: Building Exposure by Occupancy Type** 

Occupancy	Exposure (\$1000)	Percent of Tot
Residential	219,576	66.6%
Commercial	59,176	17.9%
Industrial	35,688	10.8%
Agricultural	5,453	1.7%
Religious	5,118	1.6%
Government	2,723	0.8%
Education	2,167	0.7%
Total	329,901	100.0%

### **Essential Facility Inventory**

For essential facilities, there are no hospitals in the region with a total bed capacity of no beds. There are 1 schools, 1 fire stations, no police stations and no emergency operation facilities.

#### Hurricane Scenario

Hazus used the following set of information to define the hurricane parameters for the hurricane loss estimate provided in this report.

Scenario Name: Probabilistic

Type: Probabilistic

### **General Building Stock Damage**

Hazus estimates that about 29 buildings will be at least moderately damaged. This is over 2% of the total number of buildings in the region. There are an estimated 1 buildings that will be completely destroyed. The definition of the 'damage states' is provided in Volume 1: Chapter 6 of the Hazus Hurricane technical manual. Table 2 below summarizes the expected damage by general occupancy for the buildings in the region. Table 3 summarizes the expected damage by general building type.

Table 2: Expected Building Damage by Occupancy : 500 - year Event

	Non	ie	Mind	or	Moder	ate	Sevei	re	Destructi	on
Occupancy	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Agriculture	17	86.35	2	10.27	0	2.26	0	1.03	0	0.08
Commercial	107	89.81	10	8.29	2	1.66	0	0.24	0	0.00
Education	2	91.89	0	7.27	0	0.82	0	0.03	0	0.00
Government	6	90.09	1	8.52	0	1.35	0	0.04	0	0.00
Industrial	44	89.77	4	8.29	1	1.64	0	0.29	0	0.02
Religion	9	90.18	1	8.87	0	0.93	0	0.03	0	0.00
Residential	1,102	84.44	179	13.69	23	1.79	1	0.04	1	0.04
Total	1,287		196		27		1		1	

Table 3: Expected Building Damage by Building Type : 500 - year Event

Building	Nor	None		Minor		Moderate		Severe		Destruction	
Туре	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)	
Concrete	10	89.62	1	8.92	0	1.43	0	0.03	0	0.00	
Masonry	99	84.91	12	10.63	5	4.07	0	0.36	0	0.03	
MH	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	
Steel	79	89.94	7	7.73	2	1.98	0	0.35	0	0.00	
Wood	1,018	85.25	161	13.52	14	1.16	0	0.03	1	0.04	

# **Essential Facility Damage**

Before the hurricane, the region had no hospital beds available for use. On the day of the hurricane, the model estimates that 0 hospital beds (0%) are available for use. After one week, none of the beds will be in service. By 30 days, none will be operational.

**Table 4: Expected Damage to Essential Facilities** 

#### # Facilities

Classification	Total	Probability of at Least Moderate Damage > 50%	Probability of Complete Damage > 50%	Expected Loss of Use < 1 day
Fire Stations	1	0	0	1
Schools	1	0	0	1

# **Induced Hurricane Damage**

#### **Debris Generation**

Hazus estimates the amount of debris that will be generated by the hurricane. The model breaks the debris into four general categories: a) Brick/Wood, b) Reinforced Concrete/Steel, c) Eligible Tree Debris, and d) Other Tree Debris. This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 12,385 tons of debris will be generated. Of the total amount, 10,872 tons (88%) is Other Tree Debris. Of the remaining 1,513 tons, Brick/Wood comprises 29% of the total, Reinforced Concrete/Steel comprises of 0% of the total, with the remainder being Eligible Tree Debris. If the building debris tonnage is converted to an estimated number of truckloads, it will require 18 truckloads (@25 tons/truck) to remove the building debris generated by the hurricane. The number of Eligible Tree Debris truckloads will depend on how the 1,075 tons of Eligible Tree Debris are collected and processed. The volume of tree debris generally ranges from about 4 cubic yards per ton for chipped or compacted tree debris to about 10 cubic yards per ton for bulkier, uncompacted debris.

### **Social Impact**

#### **Shelter Requirement**

Hazus estimates the number of households that are expected to be displaced from their homes due to the hurricane and the number of displaced people that will require accommodations in temporary public shelters. The model estimates 0 households to be displaced due to the hurricane. Of these, 0 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

The total economic loss estimated for the hurricane is 4.4 million dollars, which represents 1.32 % of the total replacement value of the region's buildings.

### **Building-Related Losses**

The building related losses are broken into two categories: direct property damage losses and business interruption losses. The direct property damage losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the hurricane. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the hurricane.

The total property damage losses were 4 million dollars. 3% of the estimated losses were related to the business interruption of the region. By far, the largest loss was sustained by the residential occupancies which made up over 87% of the total loss. Table 4 below provides a summary of the losses associated with the building damage.

Table 5: Building-Related Economic Loss Estimates

(Thousands of dollars)

Category	Area	Residential	Commercial	Industrial	Others	Total
Property Da	mage_					
	Building	2,723.70	143.11	106.15	63.76	3,036.71
	Content	875.30	29.53	53.30	22.54	980.66
	Inventory	0.00	1.19	9.18	2.35	12.71
	Subtotal	3,599.00	173.82	168.63	88.64	4,030.08
Business Int	erruption Loss Income	0.00	20.27	1.77	4.18	26.22
	Relocation	115.02	27.11	6.86	11.44	160.45
	Rental	67.06	13.64	1.29	0.74	82.74
	Wage	0.00	24.41	2.47	35.55	62.42
	Subtotal	182.09	85.43	12.39	51.92	331.83
<u>Total</u>						
	Total	3,781.08	259.25	181.02	140.55	4,361.92

# **Appendix A: County Listing for the Region**

Connecticut
- Litchfield

# **Appendix B: Regional Population and Building Value Data**

	— Population	Residential	Non-Residential	Total
Connecticut				
Litchfield	3,350	219,576	110,325	329,901
Total	3,350	219,576	110,325	329,901
Study Region Total	3,350	219,576	110,325	329,901

# **Hazus-MH: Hurricane Event Report**

Region Name: North Canaan

Hurricane Scenario: Probabilistic 1000-year Return Period

Print Date: Tuesday, August 27, 2013

#### Disclaimer

Totals only reflect data for those census tracts/blocks included in the user's study region.

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social and economic losses following a specific Hurricane. These results can be improved by using enhanced inventory data.

# **Table of Contents**

Section	Page #
General Description of the Region	3
Building Inventory	4
General Building Stock	
Essential Facility Inventory	
Hurricane Scenario Parameters	5
Building Damage	6
General Building Stock	
Essential Facilities Damage	
Induced Hurricane Damage	8
Debris Generation	
Social Impact	8
Shelter Requirements	
Economic Loss	9
Building Losses	
Appendix A: County Listing for the Region	10
Appendix B: Regional Population and Building Value Data	11

# General Description of the Region

Hazus is a regional multi-hazard loss estimation model that was developed by the Federal Emergency Management Agency and the National Institute of Building Sciences. The primary purpose of Hazus is to provide a methodology and software application to develop multi-hazard losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from multi-hazards and to prepare for emergency response and recovery.

The hurricane loss estimates provided in this report are based on a region that includes 1 county(ies) from the following state(s):

#### - Connecticut

#### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19.43 square miles and contains 1 census tracts. There are over 1 thousand households in the region and has a total population of 3,350 people (2000 Census Bureau data). The distribution of population by State and County is provided in Appendix B.

There are an estimated 1 thousand buildings in the region with a total building replacement value (excluding contents) of 330 million dollars (2006 dollars). Approximately 86% of the buildings (and 67% of the building value) are associated with residential housing.

# **Building Inventory**

### **General Building Stock**

Hazus estimates that there are 1,512 buildings in the region which have an aggregate total replacement value of 330 million (2006 dollars). Table 1 presents the relative distribution of the value with respect to the general occupancies. Appendix B provides a general distribution of the building value by State and County.

**Table 1: Building Exposure by Occupancy Type** 

Occupancy	Exposure (\$1000)	Percent of Tot
Residential	219,576	66.6%
Commercial	59,176	17.9%
Industrial	35,688	10.8%
Agricultural	5,453	1.7%
Religious	5,118	1.6%
Government	2,723	0.8%
Education	2,167	0.7%
Total	329,901	100.0%

### **Essential Facility Inventory**

For essential facilities, there are no hospitals in the region with a total bed capacity of no beds. There are 1 schools, 1 fire stations, no police stations and no emergency operation facilities.

#### Hurricane Scenario

Hazus used the following set of information to define the hurricane parameters for the hurricane loss estimate provided in this report.

Scenario Name: Probabilistic

Type: Probabilistic

### **General Building Stock Damage**

Hazus estimates that about 85 buildings will be at least moderately damaged. This is over 6% of the total number of buildings in the region. There are an estimated 3 buildings that will be completely destroyed. The definition of the 'damage states' is provided in Volume 1: Chapter 6 of the Hazus Hurricane technical manual. Table 2 below summarizes the expected damage by general occupancy for the buildings in the region. Table 3 summarizes the expected damage by general building type.

Table 2: Expected Building Damage by Occupancy : 1000 - year Event

	Non	ie	Mind	or	Moder	ate	Sevei	re	Destructi	on
Occupancy	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Agriculture	14	72.36	4	18.80	1	5.72	1	2.76	0	0.36
Commercial	93	77.92	19	15.85	6	5.28	1	0.94	0	0.01
Education	2	81.61	0	14.56	0	3.58	0	0.26	0	0.00
Government	5	78.00	1	16.09	0	5.43	0	0.49	0	0.00
Industrial	38	77.87	8	15.38	3	5.56	1	1.12	0	0.08
Religion	8	78.23	2	17.57	0	3.91	0	0.29	0	0.00
Residential	918	70.35	316	24.19	64	4.94	3	0.26	3	0.26
Total	1,078		349		75		6		3	

Table 3: Expected Building Damage by Building Type : 1000 - year Event

Building	Nor	None		Minor		Moderate		re	Destruction	
Туре	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Concrete	9	77.63	2	16.46	1	5.63	0	0.28	0	0.00
Masonry	84	71.87	21	17.68	11	9.24	1	1.08	0	0.14
MH	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Steel	69	78.10	13	14.37	5	6.18	1	1.34	0	0.01
Wood	851	71.31	293	24.50	44	3.72	3	0.22	3	0.25

# **Essential Facility Damage**

Before the hurricane, the region had no hospital beds available for use. On the day of the hurricane, the model estimates that 0 hospital beds (0%) are available for use. After one week, none of the beds will be in service. By 30 days, none will be operational.

**Table 4: Expected Damage to Essential Facilities** 

#### # Facilities

Classification	Total	Probability of at Least Moderate Damage > 50%	Probability of Complete Damage > 50%	Expected Loss of Use < 1 day
Fire Stations	1	0	0	1
Schools	1	0	0	0

# **Induced Hurricane Damage**

### **Debris Generation**

Hazus estimates the amount of debris that will be generated by the hurricane. The model breaks the debris into four general categories: a) Brick/Wood, b) Reinforced Concrete/Steel, c) Eligible Tree Debris, and d) Other Tree Debris. This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 19,352 tons of debris will be generated. Of the total amount, 16,740 tons (87%) is Other Tree Debris. Of the remaining 2,612 tons, Brick/Wood comprises 37% of the total, Reinforced Concrete/Steel comprises of 0% of the total, with the remainder being Eligible Tree Debris. If the building debris tonnage is converted to an estimated number of truckloads, it will require 38 truckloads (@25 tons/truck) to remove the building debris generated by the hurricane. The number of Eligible Tree Debris truckloads will depend on how the 1,656 tons of Eligible Tree Debris are collected and processed. The volume of tree debris generally ranges from about 4 cubic yards per ton for chipped or compacted tree debris to about 10 cubic yards per ton for bulkier, uncompacted debris.

### **Social Impact**

#### **Shelter Requirement**

Hazus estimates the number of households that are expected to be displaced from their homes due to the hurricane and the number of displaced people that will require accommodations in temporary public shelters. The model estimates 0 households to be displaced due to the hurricane. Of these, 0 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

The total economic loss estimated for the hurricane is 9.6 million dollars, which represents 2.90 % of the total replacement value of the region's buildings.

### **Building-Related Losses**

The building related losses are broken into two categories: direct property damage losses and business interruption losses. The direct property damage losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the hurricane. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the hurricane.

The total property damage losses were 10 million dollars. 4% of the estimated losses were related to the business interruption of the region. By far, the largest loss was sustained by the residential occupancies which made up over 82% of the total loss. Table 4 below provides a summary of the losses associated with the building damage.

Table 5: Building-Related Economic Loss Estimates

(Thousands of dollars)

Category	Area	Residential	Commercial	Industrial	Others	Total
Property Da	mage_					
	Building	5,410.08	416.59	313.54	176.75	6,316.97
	Content	1,861.39	134.63	196.33	74.49	2,266.83
	Inventory	0.00	4.95	31.79	7.08	43.82
	Subtotal	7,271.47	556.17	541.66	258.32	8,627.62
Business Int	erruption Loss Income	0.00	46.70	4.73	7.34	58.77
	Relocation	373.38	82.58	23.52	29.28	508.76
	Rental	177.03	40.18	3.91	1.87	222.98
	Wage	0.00	62.71	6.62	90.81	160.13
	Subtotal	550.41	232.17	38.78	129.29	950.64
<u>Total</u>						
	Total	7,821.87	788.33	580.44	387.61	9,578.26

# **Appendix A: County Listing for the Region**

Connecticut
- Litchfield

## **Appendix B: Regional Population and Building Value Data**

<b>Building Value (tho</b>	usands of dollars)
----------------------------	--------------------

			<u> </u>	<u> </u>
	Population	Residential	Non-Residential	Total
Connecticut				
Litchfield	3,350	219,576	110,325	329,901
Total	3,350	219,576	110,325	329,901
Study Region Total	3,350	219,576	110,325	329,901

# Hazus-MH: Earthquake Event Report

Region Name: North Canaan

Earthquake Scenario: East Haddam

Print Date: September 30, 2013

Totals only reflect data for those census tracts/blocks included in the user's study region.

### Disclaimer:

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social and economic losses following a specific earthquake. These results can be improved by using enhanced inventory, geotechnical, and observed ground motion data.

## **Table of Contents**

Section	Page #
General Description of the Region	3
Building and Lifeline Inventory	4
Building Inventory	
Critical Facility Inventory	
Transportation and Utility Lifeline Inventory	
Earthquake Scenario Parameters	6
Direct Earthquake Damage	7
Buildings Damage	
Critical Facilities Damage	
Transportation and Utility Lifeline Damage	
Induced Earthquake Damage	11
Fire Following Earthquake	
Debris Generation	
Social Impact	12
Shelter Requirements	
Casualties	
Economic Loss	13
Building Losses	
Transportation and Utility Lifeline Losses	
Long-term Indirect Economic Impacts	
Appendix A: County Listing for the Region	
Appendix B: Regional Population and Building Value Data	

## General Description of the Region

Hazus is a regional earthquake loss estimation model that was developed by the Federal Emergency Management Agency and the National Institute of Building Sciences. The primary purpose of Hazus is to provide a methodology and software application to develop earthquake losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from earthquakes and to prepare for emergency response and recovery.

The earthquake loss estimates provided in this report was based on a region that includes 1 county(ies) from the following state(s):

### Connecticut

#### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19.43 square miles and contains 1 census tracts. There are over 1 thousand households in the region which has a total population of 3,350 people (2002 Census Bureau data). The distribution of population by State and County is provided in Appendix B.

There are an estimated 1 thousand buildings in the region with a total building replacement value (excluding contents) of 329 (millions of dollars). Approximately 86.00 % of the buildings (and 67.00% of the building value) are associated with residential housing.

The replacement value of the transportation and utility lifeline systems is estimated to be 250 and 0 (millions of dollars), respectively.

## **Building and Lifeline Inventory**

### **Building Inventory**

Hazus estimates that there are 1 thousand buildings in the region which have an aggregate total replacement value of 329 (millions of dollars). Appendix B provides a general distribution of the building value by State and County.

In terms of building construction types found in the region, wood frame construction makes up 80% of the building inventory. The remaining percentage is distributed between the other general building types.

### **Critical Facility Inventory**

Hazus breaks critical facilities into two (2) groups: essential facilities and high potential loss facilities (HPL). Essential facilities include hospitals, medical clinics, schools, fire stations, police stations and emergency operations facilities. High potential loss facilities include dams, levees, military installations, nuclear power plants and hazardous material sites.

For essential facilities, there are 0 hospitals in the region with a total bed capacity of 0 beds. There are 1 schools, 1 fire stations, 0 police stations and 0 emergency operation facilities. With respect to high potential loss facilities (HPL), there are 1 dams identified within the region. Of these, 1 of the dams are classified as 'high hazard'. The inventory also includes 1 hazardous material sites, 0 military installations and 0 nuclear power plants.

### <u>Transportation and Utility Lifeline Inventory</u>

Within Hazus, the lifeline inventory is divided between transportation and utility lifeline systems. There are seven (7) transportation systems that include highways, railways, light rail, bus, ports, ferry and airports. There are six (6) utility systems that include potable water, wastewater, natural gas, crude & refined oil, electric power and communications. The lifeline inventory data are provided in Tables 1 and 2.

The total value of the lifeline inventory is over 250.00 (millions of dollars). This inventory includes over 47 kilometers of highways, 14 bridges, 222 kilometers of pipes.

**Table 1: Transportation System Lifeline Inventory** 

System	Component	# Locations/ # Segments	Replacement value (millions of dollars)
Highway	Bridges	14	78.50
	Segments	5	159.50
	Tunnels	0	0.00
		Subtotal	238.00
Railways	Bridges	0	0.00
	Facilities	0	0.00
	Segments	7	12.00
	Tunnels	0	0.00
		Subtotal	12.00
Light Rail	Bridges	0	0.00
	Facilities	0	0.00
	Segments	0	0.00
	Tunnels	0	0.00
		Subtotal	0.00
Bus	Facilities	0	0.00
		Subtotal	0.00
Ferry	Facilities	0	0.00
,		Subtotal	0.00
Port	Facilities	0	0.00
		Subtotal	0.00
Airport	Facilities	0	0.00
Allpoit	Runways	0	0.00
	· tanmayo	Subtotal	0.00
		Total	250.00

Table 2: Utility System Lifeline Inventory

System	Component	# Locations / Segments	Replacement value (millions of dollars)
Potable Water	Distribution Lines	NA	2.20
	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	2.20
Waste Water	Distribution Lines	NA	1.30
	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	1.30
Natural Gas	Distribution Lines	NA	0.90
	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	0.90
Oil Systems	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	0.00
Electrical Power	Facilities	0	0.00
		Subtotal	0.00
Communication	Facilities	0	0.00
		Subtotal	0.00
		Total	4.40

### Earthquake Scenario

Hazus uses the following set of information to define the earthquake parameters used for the earthquake loss estimate provided in this report.

Scenario Name East Haddam

Type of Earthquake Arbitrary

Fault Name NA
Historical Epicenter ID# NA

Probabilistic Return Period NA

Longitude of Epicenter -72.40

Latitude of Epicenter 41.50

Earthquake Magnitude 6.40

**Depth (Km)** 10.00

Rupture Length (Km) NA

Rupture Orientation (degrees) NA

Attenuation Function Central & East US (CEUS 2008)

### **Building Damage**

Hazus estimates that about 36 buildings will be at least moderately damaged. This is over 2.00 % of the buildings in the region. There are an estimated 0 buildings that will be damaged beyond repair. The definition of the 'damage states' is provided in Volume 1: Chapter 5 of the Hazus technical manual. Table 3 below summarizes the expected damage by general occupancy for the buildings in the region. Table 4 below summarizes the expected damage by general building type.

Table 3: Expected Building Damage by Occupancy

	None		Slight		Moderate		Extensive		Complete	
	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Agriculture	17	1.28	2	1.54	1	2.21	0	2.96	0	2.56
Commercial	101	7.49	12	9.29	5	16.23	1	21.65	0	24.11
Education	2	0.13	0	0.15	0	0.26	0	0.30	0	0.43
Government	6	0.44	1	0.53	0	0.96	0	1.08	0	1.44
Industrial	42	3.08	5	3.78	2	7.06	0	8.49	0	9.98
Other Residential	221	16.37	22	17.31	7	22.14	1	27.51	0	30.77
Religion	9	0.64	1	0.74	0	1.18	0	1.67	0	2.04
Single Family	953	70.57	83	66.67	16	49.96	1	36.36	0	28.68
Total	1,350		125		33		4		0	

Table 4: Expected Building Damage by Building Type (All Design Levels)

	None		Slight		Moderate		Extensive		Complete	
	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Wood	1,096	81.15	94	74.80	16	49.51	1	25.80	0	8.07
Steel	85	6.30	10	7.69	5	15.31	1	16.70	0	19.06
Concrete	20	1.47	2	1.65	1	3.11	0	1.88	0	1.90
Precast	5	0.40	1	0.41	0	1.22	0	2.49	0	0.37
RM	34	2.55	2	1.89	2	4.95	0	7.25	0	0.28
URM	110	8.13	17	13.54	8	25.89	2	45.87	0	70.32
МН	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Total	1,350		125		33		4		0	

\*Note:

RM Reinforced Masonry
URM Unreinforced Masonry
MH Manufactured Housing

## **Essential Facility Damage**

Before the earthquake, the region had 0 hospital beds available for use. On the day of the earthquake, the model estimates that only 0 hospital beds (0.00%) are available for use by patients already in the hospital and those injured by the earthquake. After one week, 0.00% of the beds will be back in service. By 30 days, 0.00% will be operational.

**Table 5: Expected Damage to Essential Facilities** 

Classification	Total	At Least Moderate Damage > 50%	Complete Damage > 50%	With Functionality > 50% on day 1
Hospitals	0	0	0	0
Schools	1	0	0	1
EOCs	0	0	0	0
PoliceStations	0	0	0	0
FireStations	1	0	0	1

### <u>Transportation and Utility Lifeline Damage</u>

Table 6 provides damage estimates for the transportation system.

**Table 6: Expected Damage to the Transportation Systems** 

				Number of Location	ons_		
System	Component	Locations/	With at Least	With Complete	With Functionality > 50 %		
		Segments	Mod. Damage	Damage	After Day 1	After Day 7	
Highway	Segments	5	0	0	5	5	
	Bridges	14	0	0	14	14	
	Tunnels	0	0	0	0	0	
Railways	Segments	7	0	0	7	7	
	Bridges	0	0	0	0	0	
	Tunnels	0	0	0	0	0	
	Facilities	0	0	0	0	0	
Light Rail	Segments	0	0	0	0	0	
	Bridges	0	0	0	0	0	
	Tunnels	0	0	0	0	0	
	Facilities	0	0	0	0	0	
Bus	Facilities	0	0	0	0	0	
Ferry	Facilities	0	0	0	0	0	
Port	Facilities	0	0	0	0	0	
Airport	Facilities	0	0	0	0	0	
	Runways	0	0	0	0	0	

Note: Roadway segments, railroad tracks and light rail tracks are assumed to be damaged by ground failure only. If ground failure maps are not provided, damage estimates to these components will not be computed.

Tables 7-9 provide information on the damage to the utility lifeline systems. Table 7 provides damage to the utility system facilities. Table 8 provides estimates on the number of leaks and breaks by the pipelines of the utility systems. For electric power and potable water, Hazus performs a simplified system performance analysis. Table 9 provides a summary of the system performance information.

Table 7 : Expected Utility System Facility Damage

	# of Locations							
System	Total #	With at Least	With at Least With Complete		with Functionality > 50 %			
		Moderate Damage	Damage	After Day 1	After Day 7			
Potable Water	0	0	0	0	0			
Waste Water	0	0	0	0	0			
Natural Gas	0	0	0	0	0			
Oil Systems	0	0	0	0	0			
Electrical Power	0	0	0	0	0			
Communication	0	0	0	0	0			

Table 8 : Expected Utility System Pipeline Damage (Site Specific)

System	Total Pipelines Length (kms)	Number of Leaks	Number of Breaks
Potable Water	111	4	1
Waste Water	67	2	1
Natural Gas	44	1	0
Oil	0	0	0

Table 9: Expected Potable Water and Electric Power System Performance

	Total # of	Number of Households without Service						
	Households	At Day 1	At Day 3	At Day 7	At Day 30	At Day 90		
Potable Water	1,343	0	0	0	0	0		
Electric Power		0	0	0	0	0		

## **Induced Earthquake Damage**

### Fire Following Earthquake

Fires often occur after an earthquake. Because of the number of fires and the lack of water to fight the fires, they can often burn out of control. Hazus uses a Monte Carlo simulation model to estimate the number of ignitions and the amount of burnt area. For this scenario, the model estimates that there will be 0 ignitions that will burn about 0.00 sq. mi 0.00 % of the region's total area.) The model also estimates that the fires will displace about 0 people and burn about 0 (millions of dollars) of building value.

### **Debris Generation**

Hazus estimates the amount of debris that will be generated by the earthquake. The model breaks the debris into two general categories: a) Brick/Wood and b) Reinforced Concrete/Steel. This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 0.00 million tons of debris will be generated. Of the total amount, Brick/Wood comprises 61.00% of the total, with the remainder being Reinforced Concrete/Steel. If the debris tonnage is converted to an estimated number of truckloads, it will require 0 truckloads (@25 tons/truck) to remove the debris generated by the earthquake.

## **Social Impact**

### **Shelter Requirement**

Hazus estimates the number of households that are expected to be displaced from their homes due to the earthquake and the number of displaced people that will require accommodations in temporary public shelters. The model estimates 1 households to be displaced due to the earthquake. Of these, 1 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

### **Casualties**

Hazus estimates the number of people that will be injured and killed by the earthquake. The casualties are broken down into four (4) severity levels that describe the extent of the injuries. The levels are described as follows;

- · Severity Level 1: Injuries will require medical attention but hospitalization is not needed.
- · Severity Level 2: Injuries will require hospitalization but are not considered life-threatening
- · Severity Level 3: Injuries will require hospitalization and can become life threatening if not promptly treated.
- · Severity Level 4: Victims are killed by the earthquake.

The casualty estimates are provided for three (3) times of day: 2:00 AM, 2:00 PM and 5:00 PM. These times represent the periods of the day that different sectors of the community are at their peak occupancy loads. The 2:00 AM estimate considers that the residential occupancy load is maximum, the 2:00 PM estimate considers that the educational, commercial and industrial sector loads are maximum and 5:00 PM represents peak commute time.

Table 10 provides a summary of the casualties estimated for this earthquake

Table 10: Casualty Estimates

-		Level 1	Level 2	Level 3	Level 4
2 AM	Commercial	0	0	0	0
	Commuting	0	0	0	0
	Educational	0	0	0	0
	Hotels	0	0	0	0
	Industrial	0	0	0	0
	Other-Residential	0	0	0	0
	Single Family	0	0	0	0
	Total	1	0	0	0
2 PM	Commercial	0	0	0	0
	Commuting	0	0	0	0
	Educational	0	0	0	0
	Hotels	0	0	0	0
	Industrial	0	0	0	0
	Other-Residential	0	0	0	0
	Single Family	0	0	0	0
	Total	1	0	0	0
5 PM	Commercial	0	0	0	0
	Commuting	0	0	0	0
	Educational	0	0	0	0
	Hotels	0	0	0	0
	Industrial	0	0	0	0
	Other-Residential	0	0	0	0
	Single Family	0	0	0	0
	Total	0	0	0	0

### **Economic Loss**

The total economic loss estimated for the earthquake is 3.62 (millions of dollars), which includes building and lifeline related losses based on the region's available inventory. The following three sections provide more detailed information about these losses.

### **Building-Related Losses**

The building losses are broken into two categories: direct building losses and business interruption losses. The direct building losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the earthquake. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the earthquake.

The total building-related losses were 3.10 (millions of dollars); 21 % of the estimated losses were related to the business interruption of the region. By far, the largest loss was sustained by the residential occupancies which made up over 48 % of the total loss. Table 11 below provides a summary of the losses associated with the building damage.

Table 11: Building-Related Economic Loss Estimates

(Millions of dollars)

Category	Area	Single Family	Other Residential	Commercial	Industrial	Others	Total
Income Los	ses						
	Wage	0.00	0.00	0.14	0.01	0.01	0.16
	Capital-Related	0.00	0.00	0.10	0.01	0.00	0.11
	Rental	0.02	0.04	0.07	0.01	0.00	0.14
	Relocation	0.07	0.03	0.10	0.03	0.02	0.25
	Subtotal	0.09	0.08	0.41	0.05	0.04	0.66
Capital Sto	ck Losses						
	Structural	0.14	0.08	0.12	0.06	0.04	0.45
	Non_Structural	0.55	0.32	0.33	0.19	0.07	1.46
	Content	0.14	0.07	0.15	0.12	0.04	0.51
	Inventory	0.00	0.00	0.00	0.02	0.00	0.02
	Subtotal	0.84	0.47	0.60	0.39	0.15	2.44
	Total	0.93	0.55	1.01	0.43	0.19	3.10

### **Transportation and Utility Lifeline Losses**

For the transportation and utility lifeline systems, Hazus computes the direct repair cost for each component only. There are no losses computed by Hazus for business interruption due to lifeline outages. Tables 12 & 13 provide a detailed breakdown in the expected lifeline losses.

Hazus estimates the long-term economic impacts to the region for 15 years after the earthquake. The model quantifies this information in terms of income and employment changes within the region. Table 14 presents the results of the region for the given earthquake.

Table 12: Transportation System Economic Losses

(Millions of dollars)

System	Component	Inventory Value	Economic Loss	Loss Ratio (%)
Highway	Segments	159.48	\$0.00	0.00
	Bridges	78.51	\$0.49	0.62
	Tunnels	0.00	\$0.00	0.00
	Subtotal	238.00	0.50	
Railways	Segments	12.04	\$0.00	0.00
	Bridges	0.00	\$0.00	0.00
	Tunnels	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Subtotal	12.00	0.00	
Light Rail	Segments	0.00	\$0.00	0.00
	Bridges	0.00	\$0.00	0.00
	Tunnels	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Bus	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Ferry	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Port	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Airport	Facilities	0.00	\$0.00	0.00
	Runways	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
	Total	250.00	0.50	

### Table 13: Utility System Economic Losses

(Millions of dollars)

System	Component	Inventory Value	Economic Loss	Loss Ratio (%)
Potable Water	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Distribution Lines	2.20	\$0.02	0.82
	Subtotal	2.22	\$0.02	
Waste Water	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Distribution Lines	1.30	\$0.01	0.69
	Subtotal	1.33	\$0.01	
Natural Gas	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Distribution Lines	0.90	\$0.00	0.35
	Subtotal	0.89	\$0.00	
Oil Systems	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	\$0.00	
Electrical Power	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	\$0.00	
Communication	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	\$0.00	
	Total	4.45	\$0.03	

# Table 14. Indirect Economic Impact with outside aid (Employment as # of people and Income in millions of \$)

LOSS	Total	%

Litchfield,CT			

## **Appendix B: Regional Population and Building Value Data**

State				Building Value (millions of dollars)				
	County Name	Population	Residential	Non-Residential	Total			
Connecticut								
	Litchfield	3,350	219	110	329			
Total State		3,350	219	110	329			
Total Region		3,350	219	110	329			

# Hazus-MH: Earthquake Event Report

Region Name: North Canaan

Earthquake Scenario: Haddam

Print Date: September 30, 2013

Totals only reflect data for those census tracts/blocks included in the user's study region.

### Disclaimer:

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social and economic losses following a specific earthquake. These results can be improved by using enhanced inventory, geotechnical, and observed ground motion data.

## **Table of Contents**

Se	ection	Page #
Ge	eneral Description of the Region	3
Ви	uilding and Lifeline Inventory	4
	Building Inventory	
	Critical Facility Inventory	
	Transportation and Utility Lifeline Inventory	
Ea	arthquake Scenario Parameters	6
Di	rect Earthquake Damage	7
	Buildings Damage	
	Critical Facilities Damage	
	Transportation and Utility Lifeline Damage	
Inc	duced Earthquake Damage	11
	Fire Following Earthquake	
	Debris Generation	
So	ocial Impact	12
	Shelter Requirements	
	Casualties	
Ec	conomic Loss	13
	Building Losses	
	Transportation and Utility Lifeline Losses	
	Long-term Indirect Economic Impacts	
Ар	ppendix A: County Listing for the Region	
Ap	opendix B: Regional Population and Building Value Data	

## General Description of the Region

Hazus is a regional earthquake loss estimation model that was developed by the Federal Emergency Management Agency and the National Institute of Building Sciences. The primary purpose of Hazus is to provide a methodology and software application to develop earthquake losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from earthquakes and to prepare for emergency response and recovery.

The earthquake loss estimates provided in this report was based on a region that includes 1 county(ies) from the following state(s):

### Connecticut

#### Note

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19.43 square miles and contains 1 census tracts. There are over 1 thousand households in the region which has a total population of 3,350 people (2002 Census Bureau data). The distribution of population by State and County is provided in Appendix B.

There are an estimated 1 thousand buildings in the region with a total building replacement value (excluding contents) of 329 (millions of dollars). Approximately 86.00 % of the buildings (and 67.00% of the building value) are associated with residential housing.

The replacement value of the transportation and utility lifeline systems is estimated to be 250 and 0 (millions of dollars), respectively.

## **Building and Lifeline Inventory**

### **Building Inventory**

Hazus estimates that there are 1 thousand buildings in the region which have an aggregate total replacement value of 329 (millions of dollars). Appendix B provides a general distribution of the building value by State and County.

In terms of building construction types found in the region, wood frame construction makes up 80% of the building inventory. The remaining percentage is distributed between the other general building types.

### **Critical Facility Inventory**

Hazus breaks critical facilities into two (2) groups: essential facilities and high potential loss facilities (HPL). Essential facilities include hospitals, medical clinics, schools, fire stations, police stations and emergency operations facilities. High potential loss facilities include dams, levees, military installations, nuclear power plants and hazardous material sites.

For essential facilities, there are 0 hospitals in the region with a total bed capacity of 0 beds. There are 1 schools, 1 fire stations, 0 police stations and 0 emergency operation facilities. With respect to high potential loss facilities (HPL), there are 1 dams identified within the region. Of these, 1 of the dams are classified as 'high hazard'. The inventory also includes 1 hazardous material sites, 0 military installations and 0 nuclear power plants.

### <u>Transportation and Utility Lifeline Inventory</u>

Within Hazus, the lifeline inventory is divided between transportation and utility lifeline systems. There are seven (7) transportation systems that include highways, railways, light rail, bus, ports, ferry and airports. There are six (6) utility systems that include potable water, wastewater, natural gas, crude & refined oil, electric power and communications. The lifeline inventory data are provided in Tables 1 and 2.

The total value of the lifeline inventory is over 250.00 (millions of dollars). This inventory includes over 47 kilometers of highways, 14 bridges, 222 kilometers of pipes.

**Table 1: Transportation System Lifeline Inventory** 

System	Component	# Locations/ # Segments	Replacement value (millions of dollars)
Highway	Bridges	14	78.50
	Segments	5	159.50
	Tunnels	0	0.00
		Subtotal	238.00
Railways	Bridges	0	0.00
	Facilities	0	0.00
	Segments	7	12.00
	Tunnels	0	0.00
		Subtotal	12.00
Light Rail	Bridges	0	0.00
· ·	Facilities	0	0.00
	Segments	0	0.00
	Tunnels	0	0.00
		Subtotal	0.00
Bus	Facilities	0	0.00
		Subtotal	0.00
Ferry	Facilities	0	0.00
•		Subtotal	0.00
Port	Facilities	0	0.00
		Subtotal	0.00
Airport	Facilities	0	0.00
	Runways	0	0.00
		Subtotal	0.00
	·	Total	250.00

Table 2: Utility System Lifeline Inventory

System	Component	# Locations / Segments	Replacement value (millions of dollars)
Potable Water	Distribution Lines	NA	2.20
	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	2.20
Waste Water	Distribution Lines	NA	1.30
	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	1.30
Natural Gas	Distribution Lines	NA	0.90
	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	0.90
Oil Systems	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	0.00
Electrical Power	Facilities	0	0.00
		Subtotal	0.00
Communication	Facilities	0	0.00
		Subtotal	0.00
		Total	4.40

### Earthquake Scenario

Hazus uses the following set of information to define the earthquake parameters used for the earthquake loss estimate provided in this report.

Scenario Name Haddam Type of Earthquake Arbitrary **Fault Name** NA NA Historical Epicenter ID # NA **Probabilistic Return Period** -72.55 Longitude of Epicenter 41.77 Latitude of Epicenter 5.70 Earthquake Magnitude 10.00 Depth (Km) NA Rupture Length (Km)

**Rupture Orientation (degrees)** 

Attenuation Function Central & East US (CEUS 2008)

NA

### **Building Damage**

Hazus estimates that about 10 buildings will be at least moderately damaged. This is over 1.00 % of the buildings in the region. There are an estimated 0 buildings that will be damaged beyond repair. The definition of the 'damage states' is provided in Volume 1: Chapter 5 of the Hazus technical manual. Table 3 below summarizes the expected damage by general occupancy for the buildings in the region. Table 4 below summarizes the expected damage by general building type.

Table 3: Expected Building Damage by Occupancy

	None		Slight	Slight Moderate		e	Extensiv	'e	Complete	
	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Agriculture	19	1.31	1	1.58	0	2.22	0	2.71	0	2.12
Commercial	112	7.73	5	9.89	2	16.59	0	20.99	0	21.70
Education	2	0.13	0	0.16	0	0.25	0	0.28	0	0.38
Government	7	0.46	0	0.54	0	0.87	0	0.93	0	1.06
Industrial	46	3.19	2	3.87	1	6.55	0	7.41	0	7.36
Other Residential	239	16.46	9	18.64	2	24.97	0	30.69	0	36.63
Religion	9	0.65	0	0.84	0	1.38	0	1.89	0	2.39
Single Family	1,017	70.06	31	64.49	5	47.17	0	35.08	0	28.37
Total	1,452		49		10		1		0	

Table 4: Expected Building Damage by Building Type (All Design Levels)

	None		Sligh	nt	Moderate		Extensive		Comple	Complete	
	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)	
Wood	1,168	80.39	34	70.43	4	42.54	0	20.24	0	0.00	
Steel	95	6.57	4	7.37	1	12.41	0	11.42	0	7.36	
Concrete	22	1.52	1	1.51	0	2.16	0	0.95	0	0.52	
Precast	6	0.41	0	0.51	0	1.57	0	2.94	0	0.18	
RM	37	2.54	1	2.31	1	6.06	0	7.53	0	0.00	
URM	124	8.56	9	17.87	3	35.26	1	56.92	0	91.93	
МН	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	
Total	1,452		49		10		1		0		

\*Note:

RM Reinforced Masonry
URM Unreinforced Masonry
MH Manufactured Housing

## **Essential Facility Damage**

Before the earthquake, the region had 0 hospital beds available for use. On the day of the earthquake, the model estimates that only 0 hospital beds (0.00%) are available for use by patients already in the hospital and those injured by the earthquake. After one week, 0.00% of the beds will be back in service. By 30 days, 0.00% will be operational.

**Table 5: Expected Damage to Essential Facilities** 

		# Facilities					
Classification	Total	At Least Moderate Damage > 50%	Complete Damage > 50%	With Functionality > 50% on day 1			
Hospitals	0	0	0	0			
Schools	1	0	0	1			
EOCs	0	0	0	0			
PoliceStations	0	0	0	0			
FireStations	1	0	0	1			

### <u>Transportation and Utility Lifeline Damage</u>

Table 6 provides damage estimates for the transportation system.

**Table 6: Expected Damage to the Transportation Systems** 

System				Number of Location	ons_		
	Component	Locations/	With at Least	With Complete	With Functionality > 50 %		
		Segments	Mod. Damage	Damage	After Day 1	After Day 7	
Highway	Segments	5	0	0	5	5	
	Bridges	14	0	0	14	14	
	Tunnels	0	0	0	0	0	
Railways	Segments	7	0	0	7	7	
	Bridges	0	0	0	0	0	
	Tunnels	0	0	0	0	0	
	Facilities	0	0	0	0	0	
Light Rail	Segments	0	0	0	0	0	
	Bridges	0	0	0	0	0	
	Tunnels	0	0	0	0	0	
	Facilities	0	0	0	0	0	
Bus	Facilities	0	0	0	0	0	
Ferry	Facilities	0	0	0	0	0	
Port	Facilities	0	0	0	0	0	
Airport	Facilities	0	0	0	0	0	
	Runways	0	0	0	0	0	

Note: Roadway segments, railroad tracks and light rail tracks are assumed to be damaged by ground failure only. If ground failure maps are not provided, damage estimates to these components will not be computed.

Tables 7-9 provide information on the damage to the utility lifeline systems. Table 7 provides damage to the utility system facilities. Table 8 provides estimates on the number of leaks and breaks by the pipelines of the utility systems. For electric power and potable water, Hazus performs a simplified system performance analysis. Table 9 provides a summary of the system performance information.

Table 7 : Expected Utility System Facility Damage

	# of Locations						
System	Total #	With at Least	With Complete	with Function	with Functionality > 50 %		
		Moderate Damage	Damage	After Day 1	After Day 7		
Potable Water	0	0	0	0	0		
Waste Water	0	0	0	0	0		
Natural Gas	0	0	0	0	0		
Oil Systems	0	0	0	0	0		
Electrical Power	0	0	0	0	0		
Communication	0	0	0	0	0		

Table 8 : Expected Utility System Pipeline Damage (Site Specific)

System	Total Pipelines Length (kms)	Number of Leaks	Number of Breaks
Potable Water	111	1	0
Waste Water	67	0	0
Natural Gas	44	0	0
Oil	0	0	0

Table 9: Expected Potable Water and Electric Power System Performance

	Total # of		Number of Households without Service				
	Households	At Day 1	At Day 3	At Day 7	At Day 30	At Day 90	
Potable Water	1,343	0	0	0	0	0	
Electric Power		0	0	0	0	0	

## **Induced Earthquake Damage**

### Fire Following Earthquake

Fires often occur after an earthquake. Because of the number of fires and the lack of water to fight the fires, they can often burn out of control. Hazus uses a Monte Carlo simulation model to estimate the number of ignitions and the amount of burnt area. For this scenario, the model estimates that there will be 0 ignitions that will burn about 0.00 sq. mi 0.00 % of the region's total area.) The model also estimates that the fires will displace about 0 people and burn about 0 (millions of dollars) of building value.

### **Debris Generation**

Hazus estimates the amount of debris that will be generated by the earthquake. The model breaks the debris into two general categories: a) Brick/Wood and b) Reinforced Concrete/Steel. This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 0.00 million tons of debris will be generated. Of the total amount, Brick/Wood comprises 70.00% of the total, with the remainder being Reinforced Concrete/Steel. If the debris tonnage is converted to an estimated number of truckloads, it will require 0 truckloads (@25 tons/truck) to remove the debris generated by the earthquake.

## **Social Impact**

### **Shelter Requirement**

Hazus estimates the number of households that are expected to be displaced from their homes due to the earthquake and the number of displaced people that will require accommodations in temporary public shelters. The model estimates 0 households to be displaced due to the earthquake. Of these, 0 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

### **Casualties**

Hazus estimates the number of people that will be injured and killed by the earthquake. The casualties are broken down into four (4) severity levels that describe the extent of the injuries. The levels are described as follows;

- · Severity Level 1: Injuries will require medical attention but hospitalization is not needed.
- · Severity Level 2: Injuries will require hospitalization but are not considered life-threatening
- · Severity Level 3: Injuries will require hospitalization and can become life threatening if not promptly treated.
- · Severity Level 4: Victims are killed by the earthquake.

The casualty estimates are provided for three (3) times of day: 2:00 AM, 2:00 PM and 5:00 PM. These times represent the periods of the day that different sectors of the community are at their peak occupancy loads. The 2:00 AM estimate considers that the residential occupancy load is maximum, the 2:00 PM estimate considers that the educational, commercial and industrial sector loads are maximum and 5:00 PM represents peak commute time.

Table 10 provides a summary of the casualties estimated for this earthquake

**Table 10: Casualty Estimates** 

_		Level 1	Level 2	Level 3	Level 4
2 AM	Commercial	0	0	0	0
	Commuting	0	0	0	О
	Educational	0	0	0	0
	Hotels	0	0	0	0
	Industrial	0	0	0	0
	Other-Residential	0	0	0	0
	Single Family	0	0	0	0
	Total	0	0	0	0
2 PM	Commercial	0	0	0	0
	Commuting	0	0	0	0
	Educational	0	0	0	0
	Hotels	0	0	0	0
	Industrial	0	0	0	0
	Other-Residential	0	0	0	0
	Single Family	0	0	0	0
	Total	0	0	0	0
5 PM	Commercial	0	0	0	O
	Commuting	0	0	0	O
	Educational	0	0	0	C
	Hotels	0	0	0	C
	Industrial	0	0	0	С
	Other-Residential	0	0	0	C
	Single Family	0	0	0	(
	Total	0	0	0	C

### **Economic Loss**

The total economic loss estimated for the earthquake is 0.95 (millions of dollars), which includes building and lifeline related losses based on the region's available inventory. The following three sections provide more detailed information about these losses.

### **Building-Related Losses**

The building losses are broken into two categories: direct building losses and business interruption losses. The direct building losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the earthquake. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the earthquake.

The total building-related losses were 0.92 (millions of dollars); 21 % of the estimated losses were related to the business interruption of the region. By far, the largest loss was sustained by the residential occupancies which made up over 48 % of the total loss. Table 11 below provides a summary of the losses associated with the building damage.

Table 11: Building-Related Economic Loss Estimates

(Millions of dollars)

Category	Area	Single Family	Other Residential	Commercial	Industrial	Others	Total
Income Los	ses						
	Wage	0.00	0.00	0.04	0.00	0.00	0.05
	Capital-Related	0.00	0.00	0.03	0.00	0.00	0.03
	Rental	0.01	0.01	0.02	0.00	0.00	0.04
	Relocation	0.02	0.01	0.03	0.01	0.01	0.07
	Subtotal	0.03	0.02	0.12	0.01	0.01	0.19
Capital Sto	ck Losses						
	Structural	0.05	0.03	0.04	0.02	0.01	0.14
	Non_Structural	0.17	0.10	0.10	0.06	0.02	0.44
	Content	0.04	0.02	0.04	0.04	0.01	0.15
	Inventory	0.00	0.00	0.00	0.01	0.00	0.01
	Subtotal	0.25	0.14	0.18	0.12	0.04	0.73
	Total	0.27	0.17	0.29	0.13	0.05	0.92

### **Transportation and Utility Lifeline Losses**

For the transportation and utility lifeline systems, Hazus computes the direct repair cost for each component only. There are no losses computed by Hazus for business interruption due to lifeline outages. Tables 12 & 13 provide a detailed breakdown in the expected lifeline losses.

Hazus estimates the long-term economic impacts to the region for 15 years after the earthquake. The model quantifies this information in terms of income and employment changes within the region. Table 14 presents the results of the region for the given earthquake.

Table 12: Transportation System Economic Losses

(Millions of dollars)

System	Component	Inventory Value	Economic Loss	Loss Ratio (%)
Highway	Segments	159.48	\$0.00	0.00
	Bridges	78.51	\$0.03	0.03
	Tunnels	0.00	\$0.00	0.00
	Subtotal	238.00	0.00	
Railways	Segments	12.04	\$0.00	0.00
	Bridges	0.00	\$0.00	0.00
	Tunnels	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Subtotal	12.00	0.00	
Light Rail	Segments	0.00	\$0.00	0.00
	Bridges	0.00	\$0.00	0.00
	Tunnels	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Bus	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Ferry	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Port	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Airport	Facilities	0.00	\$0.00	0.00
	Runways	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
	Total	250.00	0.00	

# Table 13: Utility System Economic Losses

(Millions of dollars)

System	Component	Inventory Value	Economic Loss	Loss Ratio (%)
Potable Water	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Distribution Lines	2.20	\$0.00	0.15
	Subtotal	2.22	\$0.00	
Waste Water	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Distribution Lines	1.30	\$0.00	0.13
	Subtotal	1.33	\$0.00	
Natural Gas	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Distribution Lines	0.90	\$0.00	0.07
	Subtotal	0.89	\$0.00	
Oil Systems	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	\$0.00	
Electrical Power	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	\$0.00	
Communication	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	\$0.00	
	Total	4.45	\$0.01	

# Table 14. Indirect Economic Impact with outside aid (Employment as # of people and Income in millions of \$)

LOSS	Total	%

Litchfie	ld,CT			

# **Appendix B: Regional Population and Building Value Data**

State		County Name Population	Building Value (millions of dollars)			
	County Name		Residential	Non-Residential	Total	
Connecticut						
	Litchfield	3,350	219	110	329	
Total State		3,350	219	110	329	
Total Region		3,350	219	110	329	

# Hazus-MH: Earthquake Event Report

Region Name: North Canaan

Earthquake Scenario: Portland

Print Date: October 01, 2013

Totals only reflect data for those census tracts/blocks included in the user's study region.

# Disclaimer:

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social and economic losses following a specific earthquake. These results can be improved by using enhanced inventory, geotechnical, and observed ground motion data.

# **Table of Contents**

Se	ection	Page #
Ge	eneral Description of the Region	3
Ви	uilding and Lifeline Inventory	4
	Building Inventory	
	Critical Facility Inventory	
	Transportation and Utility Lifeline Inventory	
Ea	arthquake Scenario Parameters	6
Di	rect Earthquake Damage	7
	Buildings Damage	
	Critical Facilities Damage	
	Transportation and Utility Lifeline Damage	
Inc	duced Earthquake Damage	11
	Fire Following Earthquake	
	Debris Generation	
So	ocial Impact	12
	Shelter Requirements	
	Casualties	
Ec	conomic Loss	13
	Building Losses	
	Transportation and Utility Lifeline Losses	
	Long-term Indirect Economic Impacts	
Ар	ppendix A: County Listing for the Region	
Ap	opendix B: Regional Population and Building Value Data	

# General Description of the Region

Hazus is a regional earthquake loss estimation model that was developed by the Federal Emergency Management Agency and the National Institute of Building Sciences. The primary purpose of Hazus is to provide a methodology and software application to develop earthquake losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from earthquakes and to prepare for emergency response and recovery.

The earthquake loss estimates provided in this report was based on a region that includes 1 county(ies) from the following state(s):

#### Connecticut

#### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19.43 square miles and contains 1 census tracts. There are over 1 thousand households in the region which has a total population of 3,350 people (2002 Census Bureau data). The distribution of population by State and County is provided in Appendix B.

There are an estimated 1 thousand buildings in the region with a total building replacement value (excluding contents) of 329 (millions of dollars). Approximately 86.00 % of the buildings (and 67.00% of the building value) are associated with residential housing.

The replacement value of the transportation and utility lifeline systems is estimated to be 250 and 0 (millions of dollars), respectively.

# **Building and Lifeline Inventory**

## **Building Inventory**

Hazus estimates that there are 1 thousand buildings in the region which have an aggregate total replacement value of 329 (millions of dollars). Appendix B provides a general distribution of the building value by State and County.

In terms of building construction types found in the region, wood frame construction makes up 80% of the building inventory. The remaining percentage is distributed between the other general building types.

### **Critical Facility Inventory**

Hazus breaks critical facilities into two (2) groups: essential facilities and high potential loss facilities (HPL). Essential facilities include hospitals, medical clinics, schools, fire stations, police stations and emergency operations facilities. High potential loss facilities include dams, levees, military installations, nuclear power plants and hazardous material sites.

For essential facilities, there are 0 hospitals in the region with a total bed capacity of 0 beds. There are 1 schools, 1 fire stations, 0 police stations and 0 emergency operation facilities. With respect to high potential loss facilities (HPL), there are 1 dams identified within the region. Of these, 1 of the dams are classified as 'high hazard'. The inventory also includes 1 hazardous material sites, 0 military installations and 0 nuclear power plants.

## <u>Transportation and Utility Lifeline Inventory</u>

Within Hazus, the lifeline inventory is divided between transportation and utility lifeline systems. There are seven (7) transportation systems that include highways, railways, light rail, bus, ports, ferry and airports. There are six (6) utility systems that include potable water, wastewater, natural gas, crude & refined oil, electric power and communications. The lifeline inventory data are provided in Tables 1 and 2.

The total value of the lifeline inventory is over 250.00 (millions of dollars). This inventory includes over 47 kilometers of highways, 14 bridges, 222 kilometers of pipes.

**Table 1: Transportation System Lifeline Inventory** 

System	Component	# Locations/ # Segments	Replacement value (millions of dollars)
Highway	Bridges	14	78.50
	Segments	5	159.50
	Tunnels	0	0.00
		Subtotal	238.00
Railways	Bridges	0	0.00
	Facilities	0	0.00
	Segments	7	12.00
	Tunnels	0	0.00
		Subtotal	12.00
Light Rail	Bridges	0	0.00
	Facilities	0	0.00
	Segments	0	0.00
	Tunnels	0	0.00
		Subtotal	0.00
Bus	Facilities	0	0.00
		Subtotal	0.00
Ferry	Facilities	0	0.00
•		Subtotal	0.00
Port	Facilities	0	0.00
		Subtotal	0.00
Airport	Facilities	0	0.00
	Runways	0	0.00
		Subtotal	0.00
	·	Total	250.00

Table 2: Utility System Lifeline Inventory

System	Component	# Locations / Segments	Replacement value (millions of dollars)
Potable Water	Distribution Lines	NA	2.20
	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	2.20
Waste Water	Distribution Lines	NA	1.30
	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	1.30
Natural Gas	Distribution Lines	NA	0.90
	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	0.90
Oil Systems	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	0.00
<b>Electrical Power</b>	Facilities	0	0.00
		Subtotal	0.00
Communication	Facilities	0	0.00
		Subtotal	0.00
		Total	4.40

## Earthquake Scenario

Hazus uses the following set of information to define the earthquake parameters used for the earthquake loss estimate provided in this report.

Scenario Name Portland Type of Earthquake Arbitrary **Fault Name** NA NA Historical Epicenter ID # NA **Probabilistic Return Period** -72.60 Longitude of Epicenter 41.60 Latitude of Epicenter 5.70 Earthquake Magnitude 10.00 Depth (Km) NA Rupture Length (Km) NA **Rupture Orientation (degrees)** 

Attenuation Function Central & East US (CEUS 2008)

# **Building Damage**

Hazus estimates that about 9 buildings will be at least moderately damaged. This is over 1.00 % of the buildings in the region. There are an estimated 0 buildings that will be damaged beyond repair. The definition of the 'damage states' is provided in Volume 1: Chapter 5 of the Hazus technical manual. Table 3 below summarizes the expected damage by general occupancy for the buildings in the region. Table 4 below summarizes the expected damage by general building type.

Table 3: Expected Building Damage by Occupancy

	None		Slight		Moderate		Extensive		Complete	
	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Agriculture	19	1.31	1	1.60	0	2.23	0	2.70	0	2.04
Commercial	113	7.75	4	10.09	1	16.69	0	20.82	0	21.55
Education	2	0.13	0	0.16	0	0.25	0	0.28	0	0.38
Government	7	0.46	0	0.54	0	0.86	0	0.92	0	1.06
Industrial	47	3.20	2	3.92	1	6.53	0	7.33	0	7.31
Other Residential	241	16.48	8	18.85	2	25.30	0	30.52	0	36.69
Religion	10	0.65	0	0.86	0	1.40	0	1.88	0	2.41
Single Family	1,023	70.03	27	63.98	4	46.73	0	35.55	0	28.56
Total	1,460		42		8		1		0	

Table 4: Expected Building Damage by Building Type (All Design Levels)

	None		Slight		Moderate		Extensive		Complete	
	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Wood	1,173	80.33	29	69.58	4	41.58	0	20.96	0	0.00
Steel	96	6.58	3	7.44	1	12.19	0	11.35	0	7.22
Concrete	22	1.52	1	1.52	0	2.09	0	0.79	0	0.00
Precast	6	0.41	0	0.53	0	1.61	0	2.95	0	0.19
RM	37	2.54	1	2.38	1	6.16	0	7.54	0	0.00
URM	126	8.61	8	18.55	3	36.38	0	56.41	0	92.59
MH	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Total	1,460		42		8		1		0	

\*Note:

RM Reinforced Masonry
URM Unreinforced Masonry
MH Manufactured Housing

# **Essential Facility Damage**

Before the earthquake, the region had 0 hospital beds available for use. On the day of the earthquake, the model estimates that only 0 hospital beds (0.00%) are available for use by patients already in the hospital and those injured by the earthquake. After one week, 0.00% of the beds will be back in service. By 30 days, 0.00% will be operational.

**Table 5: Expected Damage to Essential Facilities** 

		# Facilities					
Classification	Total	At Least Moderate Damage > 50%	Complete Damage > 50%	With Functionality > 50% on day 1			
Hospitals	0	0	0	0			
Schools	1	0	0	1			
EOCs	0	0	0	0			
PoliceStations	0	0	0	0			
FireStations	1	0	0	1			

# <u>Transportation and Utility Lifeline Damage</u>

Table 6 provides damage estimates for the transportation system.

**Table 6: Expected Damage to the Transportation Systems** 

				Number of Locations_					
System	Component	Locations/	With at Least	With Complete		ctionality > 50 %			
		Segments	Mod. Damage	Damage	After Day 1	After Day 7			
Highway	Segments	5	0	0	5	5			
	Bridges	14	0	0	14	14			
	Tunnels	0	0	0	0	0			
Railways	Segments	7	0	0	7	7			
	Bridges	0	0	0	0	0			
	Tunnels	0	0	0	0	0			
	Facilities	0	0	0	0	0			
Light Rail	Segments	0	0	0	0	0			
	Bridges	0	0	0	0	0			
	Tunnels	0	0	0	0	0			
	Facilities	0	0	0	0	0			
Bus	Facilities	0	0	0	0	0			
Ferry	Facilities	0	0	0	0	0			
Port	Facilities	0	0	0	0	0			
Airport	Facilities	0	0	0	0	0			
	Runways	0	0	0	0	0			

Note: Roadway segments, railroad tracks and light rail tracks are assumed to be damaged by ground failure only. If ground failure maps are not provided, damage estimates to these components will not be computed.

Tables 7-9 provide information on the damage to the utility lifeline systems. Table 7 provides damage to the utility system facilities. Table 8 provides estimates on the number of leaks and breaks by the pipelines of the utility systems. For electric power and potable water, Hazus performs a simplified system performance analysis. Table 9 provides a summary of the system performance information.

Table 7 : Expected Utility System Facility Damage

	# of Locations									
System	Total #	With at Least	With Complete	with Function	ality > 50 %					
		Moderate Damage	Damage	After Day 1	After Day 7					
Potable Water	0	0	0	0	0					
Waste Water	0	0	0	0	0					
Natural Gas	0	0	0	0	0					
Oil Systems	0	0	0	0	0					
Electrical Power	0	0	0	0	0					
Communication	0	0	0	0	0					

Table 8 : Expected Utility System Pipeline Damage (Site Specific)

System	Total Pipelines Length (kms)	Number of Leaks	Number of Breaks
Potable Water	111	1	0
Waste Water	67	0	0
Natural Gas	44	0	0
Oil	0	0	0

Table 9: Expected Potable Water and Electric Power System Performance

	Total # of		Number of Households without Service				
	Households	At Day 1	At Day 3	At Day 7	At Day 30	At Day 90	
Potable Water	1,343	0	0	0	0	0	
Electric Power		0	0	0	0	0	

# **Induced Earthquake Damage**

## Fire Following Earthquake

Fires often occur after an earthquake. Because of the number of fires and the lack of water to fight the fires, they can often burn out of control. Hazus uses a Monte Carlo simulation model to estimate the number of ignitions and the amount of burnt area. For this scenario, the model estimates that there will be 0 ignitions that will burn about 0.00 sq. mi 0.00 % of the region's total area.) The model also estimates that the fires will displace about 0 people and burn about 0 (millions of dollars) of building value.

## **Debris Generation**

Hazus estimates the amount of debris that will be generated by the earthquake. The model breaks the debris into two general categories: a) Brick/Wood and b) Reinforced Concrete/Steel. This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 0.00 million tons of debris will be generated. Of the total amount, Brick/Wood comprises 70.00% of the total, with the remainder being Reinforced Concrete/Steel. If the debris tonnage is converted to an estimated number of truckloads, it will require 0 truckloads (@25 tons/truck) to remove the debris generated by the earthquake.

# **Social Impact**

### **Shelter Requirement**

Hazus estimates the number of households that are expected to be displaced from their homes due to the earthquake and the number of displaced people that will require accommodations in temporary public shelters. The model estimates 0 households to be displaced due to the earthquake. Of these, 0 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

# **Casualties**

Hazus estimates the number of people that will be injured and killed by the earthquake. The casualties are broken down into four (4) severity levels that describe the extent of the injuries. The levels are described as follows;

- · Severity Level 1: Injuries will require medical attention but hospitalization is not needed.
- · Severity Level 2: Injuries will require hospitalization but are not considered life-threatening
- · Severity Level 3: Injuries will require hospitalization and can become life threatening if not promptly treated.
- · Severity Level 4: Victims are killed by the earthquake.

The casualty estimates are provided for three (3) times of day: 2:00 AM, 2:00 PM and 5:00 PM. These times represent the periods of the day that different sectors of the community are at their peak occupancy loads. The 2:00 AM estimate considers that the residential occupancy load is maximum, the 2:00 PM estimate considers that the educational, commercial and industrial sector loads are maximum and 5:00 PM represents peak commute time.

Table 10 provides a summary of the casualties estimated for this earthquake

Table 10: Casualty Estimates

-		Level 1	Level 2	Level 3	Level 4
2 AM	Commercial	0	0	0	0
	Commuting	0	0	0	0
	Educational	0	0	0	0
	Hotels	0	0	0	0
	Industrial	0	0	0	0
	Other-Residential	0	0	0	0
	Single Family	0	0	0	0
	Total	0	0	0	0
2 PM	Commercial	0	0	0	0
	Commuting	0	0	0	0
	Educational	0	0	0	0
	Hotels	0	0	0	0
	Industrial	0	0	0	0
	Other-Residential	0	0	0	0
	Single Family	0	0	0	0
	Total	0	0	0	0
5 PM	Commercial	0	0	0	0
	Commuting	0	0	0	0
	Educational	0	0	0	0
	Hotels	0	0	0	0
	Industrial	0	0	0	0
	Other-Residential	0	0	0	0
	Single Family	0	0	0	0
	Total	0	0	0	0

# **Economic Loss**

The total economic loss estimated for the earthquake is 0.78 (millions of dollars), which includes building and lifeline related losses based on the region's available inventory. The following three sections provide more detailed information about these losses.

### **Building-Related Losses**

The building losses are broken into two categories: direct building losses and business interruption losses. The direct building losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the earthquake. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the earthquake.

The total building-related losses were 0.75 (millions of dollars); 22 % of the estimated losses were related to the business interruption of the region. By far, the largest loss was sustained by the residential occupancies which made up over 48 % of the total loss. Table 11 below provides a summary of the losses associated with the building damage.

Table 11: Building-Related Economic Loss Estimates

(Millions of dollars)

Category	Area	Single Family	Other Residential	Commercial	Industrial	Others	Total
Income Los	ses						
	Wage	0.00	0.00	0.03	0.00	0.00	0.04
	Capital-Related	0.00	0.00	0.02	0.00	0.00	0.03
	Rental	0.00	0.01	0.02	0.00	0.00	0.04
	Relocation	0.02	0.01	0.02	0.01	0.01	0.06
	Subtotal	0.02	0.02	0.10	0.01	0.01	0.16
Capital Sto	ck Losses						
	Structural	0.04	0.02	0.03	0.02	0.01	0.12
	Non_Structural	0.13	0.08	0.08	0.04	0.02	0.35
	Content	0.03	0.01	0.03	0.03	0.01	0.11
	Inventory	0.00	0.00	0.00	0.00	0.00	0.01
	Subtotal	0.20	0.12	0.14	0.09	0.03	0.58
	Total	0.22	0.14	0.24	0.10	0.04	0.75

# **Transportation and Utility Lifeline Losses**

For the transportation and utility lifeline systems, Hazus computes the direct repair cost for each component only. There are no losses computed by Hazus for business interruption due to lifeline outages. Tables 12 & 13 provide a detailed breakdown in the expected lifeline losses.

Hazus estimates the long-term economic impacts to the region for 15 years after the earthquake. The model quantifies this information in terms of income and employment changes within the region. Table 14 presents the results of the region for the given earthquake.

Table 12: Transportation System Economic Losses

(Millions of dollars)

System	Component	Inventory Value	Economic Loss	Loss Ratio (%)
Highway	Segments	159.48	\$0.00	0.00
	Bridges	78.51	\$0.03	0.03
	Tunnels	0.00	\$0.00	0.00
	Subtotal	238.00	0.00	
Railways	Segments	12.04	\$0.00	0.00
	Bridges	0.00	\$0.00	0.00
	Tunnels	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Subtotal	12.00	0.00	
Light Rail	Segments	0.00	\$0.00	0.00
	Bridges	0.00	\$0.00	0.00
	Tunnels	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Bus	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Ferry	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Port	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Airport	Facilities	0.00	\$0.00	0.00
	Runways	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
	Total	250.00	0.00	

# Table 13: Utility System Economic Losses

(Millions of dollars)

System	Component	Inventory Value	Economic Loss	Loss Ratio (%)
Potable Water	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Distribution Lines	2.20	\$0.00	0.14
	Subtotal	2.22	\$0.00	
Waste Water	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Distribution Lines	1.30	\$0.00	0.11
	Subtotal	1.33	\$0.00	
Natural Gas	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Distribution Lines	0.90	\$0.00	0.06
	Subtotal	0.89	\$0.00	
Oil Systems	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	\$0.00	
Electrical Power	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	\$0.00	
Communication	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	\$0.00	
	Total	4.45	\$0.01	

# Table 14. Indirect Economic Impact with outside aid (Employment as # of people and Income in millions of \$)

LOSS	Total	%

Litchfield,CT			

# **Appendix B: Regional Population and Building Value Data**

		County Name Population	Buildi	Building Value (millions of dollars)		
State	County Name		Residential	Non-Residential	Total	
Connecticut						
	Litchfield	3,350	219	110	329	
Total State		3,350	219	110	329	
Total Region		3,350	219	110	329	

# Hazus-MH: Earthquake Event Report

Region Name: North Canaan

Earthquake Scenario: Stamford

Print Date: October 01, 2013

Totals only reflect data for those census tracts/blocks included in the user's study region.

# Disclaimer:

The estimates of social and economic impacts contained in this report were produced using Hazus loss estimation methodology software which is based on current scientific and engineering knowledge. There are uncertainties inherent in any loss estimation technique. Therefore, there may be significant differences between the modeled results contained in this report and the actual social and economic losses following a specific earthquake. These results can be improved by using enhanced inventory, geotechnical, and observed ground motion data.

# **Table of Contents**

Section	Page #
General Description of the Region	3
Building and Lifeline Inventory	4
Building Inventory	
Critical Facility Inventory	
Transportation and Utility Lifeline Inventory	
Earthquake Scenario Parameters	6
Direct Earthquake Damage	7
Buildings Damage	
Critical Facilities Damage	
Transportation and Utility Lifeline Damage	
Induced Earthquake Damage	11
Fire Following Earthquake	
Debris Generation	
Social Impact	12
Shelter Requirements	
Casualties	
Economic Loss	13
Building Losses	
Transportation and Utility Lifeline Losses	
Long-term Indirect Economic Impacts	
Appendix A: County Listing for the Region	
Appendix B: Regional Population and Building Value Data	

# General Description of the Region

Hazus is a regional earthquake loss estimation model that was developed by the Federal Emergency Management Agency and the National Institute of Building Sciences. The primary purpose of Hazus is to provide a methodology and software application to develop earthquake losses at a regional scale. These loss estimates would be used primarily by local, state and regional officials to plan and stimulate efforts to reduce risks from earthquakes and to prepare for emergency response and recovery.

The earthquake loss estimates provided in this report was based on a region that includes 1 county(ies) from the following state(s):

#### Connecticut

#### Note:

Appendix A contains a complete listing of the counties contained in the region.

The geographical size of the region is 19.43 square miles and contains 1 census tracts. There are over 1 thousand households in the region which has a total population of 3,350 people (2002 Census Bureau data). The distribution of population by State and County is provided in Appendix B.

There are an estimated 1 thousand buildings in the region with a total building replacement value (excluding contents) of 329 (millions of dollars). Approximately 86.00 % of the buildings (and 67.00% of the building value) are associated with residential housing.

The replacement value of the transportation and utility lifeline systems is estimated to be 250 and 0 (millions of dollars), respectively.

# **Building and Lifeline Inventory**

## **Building Inventory**

Hazus estimates that there are 1 thousand buildings in the region which have an aggregate total replacement value of 329 (millions of dollars). Appendix B provides a general distribution of the building value by State and County.

In terms of building construction types found in the region, wood frame construction makes up 80% of the building inventory. The remaining percentage is distributed between the other general building types.

### **Critical Facility Inventory**

Hazus breaks critical facilities into two (2) groups: essential facilities and high potential loss facilities (HPL). Essential facilities include hospitals, medical clinics, schools, fire stations, police stations and emergency operations facilities. High potential loss facilities include dams, levees, military installations, nuclear power plants and hazardous material sites.

For essential facilities, there are 0 hospitals in the region with a total bed capacity of 0 beds. There are 1 schools, 1 fire stations, 0 police stations and 0 emergency operation facilities. With respect to high potential loss facilities (HPL), there are 1 dams identified within the region. Of these, 1 of the dams are classified as 'high hazard'. The inventory also includes 1 hazardous material sites, 0 military installations and 0 nuclear power plants.

## <u>Transportation and Utility Lifeline Inventory</u>

Within Hazus, the lifeline inventory is divided between transportation and utility lifeline systems. There are seven (7) transportation systems that include highways, railways, light rail, bus, ports, ferry and airports. There are six (6) utility systems that include potable water, wastewater, natural gas, crude & refined oil, electric power and communications. The lifeline inventory data are provided in Tables 1 and 2.

The total value of the lifeline inventory is over 250.00 (millions of dollars). This inventory includes over 47 kilometers of highways, 14 bridges, 222 kilometers of pipes.

**Table 1: Transportation System Lifeline Inventory** 

System	Component	# Locations/ # Segments	Replacement value (millions of dollars)
Highway	Bridges	14	78.50
	Segments	5	159.50
	Tunnels	0	0.00
		Subtotal	238.00
Railways	Bridges	0	0.00
	Facilities	0	0.00
	Segments	7	12.00
	Tunnels	0	0.00
		Subtotal	12.00
Light Rail	Bridges	0	0.00
<b>g</b>	Facilities	0	0.00
	Segments	0	0.00
	Tunnels	0	0.00
		Subtotal	0.00
Bus	Facilities	0	0.00
		Subtotal	0.00
Ferry	Facilities	0	0.00
•		Subtotal	0.00
Port	Facilities	0	0.00
		Subtotal	0.00
Airport	Facilities	0	0.00
	Runways	0	0.00
		Subtotal	0.00
	·	Total	250.00

Table 2: Utility System Lifeline Inventory

System	Component	# Locations / Segments	Replacement value (millions of dollars)
Potable Water	Distribution Lines	NA	2.20
	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	2.20
Waste Water	Distribution Lines	NA	1.30
	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	1.30
Natural Gas	Distribution Lines	NA	0.90
	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	0.90
Oil Systems	Facilities	0	0.00
	Pipelines	0	0.00
		Subtotal	0.00
<b>Electrical Power</b>	Facilities	0	0.00
		Subtotal	0.00
Communication	Facilities	0	0.00
		Subtotal	0.00
		Total	4.40

## Earthquake Scenario

Hazus uses the following set of information to define the earthquake parameters used for the earthquake loss estimate provided in this report.

Scenario Name Stamford Type of Earthquake Arbitrary **Fault Name** NA NA Historical Epicenter ID # NA **Probabilistic Return Period** -73.60 Longitude of Epicenter 41.15 Latitude of Epicenter 5.70 Earthquake Magnitude 10.00 Depth (Km) NA Rupture Length (Km)

**Rupture Orientation (degrees)** 

Attenuation Function Central & East US (CEUS 2008)

NA

# **Building Damage**

Hazus estimates that about 6 buildings will be at least moderately damaged. This is over 0.00 % of the buildings in the region. There are an estimated 0 buildings that will be damaged beyond repair. The definition of the 'damage states' is provided in Volume 1: Chapter 5 of the Hazus technical manual. Table 3 below summarizes the expected damage by general occupancy for the buildings in the region. Table 4 below summarizes the expected damage by general building type.

Table 3: Expected Building Damage by Occupancy

	None		Slight		Moderat	te	Extensiv	е	Complete	e
	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Agriculture	19	1.31	1	1.64	0	2.30	0	2.58	0	1.88
Commercial	114	7.77	3	10.42	1	17.23	0	20.10	0	19.96
Education	2	0.13	0	0.16	0	0.25	0	0.27	0	0.34
Government	7	0.46	0	0.56	0	0.87	0	0.89	0	0.86
Industrial	47	3.21	1	4.03	0	6.65	0	7.08	0	6.02
Other Residential	243	16.50	6	19.22	2	26.05	0	29.97	0	38.43
Religion	10	0.65	0	0.89	0	1.47	0	1.83	0	2.47
Single Family	1,030	69.97	21	63.09	3	45.18	0	37.28	0	30.04
Total	1,473		33		6		1		0	

Table 4: Expected Building Damage by Building Type (All Design Levels)

	None		Sligh	nt	Modera	ite	Extens	ive	Comple	ete
	Count	(%)	Count	(%)	Count	(%)	Count	(%)	Count	(%)
Wood	1,182	80.24	22	68.07	2	38.81	0	23.44	0	0.00
Steel	97	6.60	2	7.57	1	12.12	0	10.88	0	2.34
Concrete	22	1.52	0	1.52	0	1.96	0	0.83	0	0.00
Precast	6	0.42	0	0.56	0	1.71	0	2.86	0	0.34
RM	37	2.54	1	2.50	0	6.44	0	6.97	0	0.00
URM	128	8.68	6	19.78	2	38.95	0	55.02	0	97.32
МН	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00
Total	1,473		33		6		1		0	

\*Note:

RM Reinforced Masonry
URM Unreinforced Masonry
MH Manufactured Housing

# **Essential Facility Damage**

Before the earthquake, the region had 0 hospital beds available for use. On the day of the earthquake, the model estimates that only 0 hospital beds (0.00%) are available for use by patients already in the hospital and those injured by the earthquake. After one week, 0.00% of the beds will be back in service. By 30 days, 0.00% will be operational.

**Table 5: Expected Damage to Essential Facilities** 

		# Facilities					
Classification	Total	At Least Moderate Damage > 50%	Complete Damage > 50%	With Functionality > 50% on day 1			
Hospitals	0	0	0	0			
Schools	1	0	0	1			
EOCs	0	0	0	0			
PoliceStations	0	0	0	0			
FireStations	1	0	0	1			

# <u>Transportation and Utility Lifeline Damage</u>

Table 6 provides damage estimates for the transportation system.

**Table 6: Expected Damage to the Transportation Systems** 

				Number of Location	Number of Locations_			
System	Component	Locations/	With at Least	With Complete		ctionality > 50 %		
		Segments	Mod. Damage	Damage	After Day 1	After Day 7		
Highway	Segments	5	0	0	5	5		
	Bridges	14	0	0	14	14		
	Tunnels	0	0	0	0	0		
Railways	Segments	7	0	0	7	7		
	Bridges	0	0	0	0	0		
	Tunnels	0	0	0	0	0		
	Facilities	0	0	0	0	0		
Light Rail	Segments	0	0	0	0	0		
	Bridges	0	0	0	0	0		
	Tunnels	0	0	0	0	0		
	Facilities	0	0	0	0	0		
Bus	Facilities	0	0	0	0	0		
Ferry	Facilities	0	0	0	0	0		
Port	Facilities	0	0	0	0	0		
Airport	Facilities	0	0	0	0	0		
	Runways	0	0	0	0	0		

Note: Roadway segments, railroad tracks and light rail tracks are assumed to be damaged by ground failure only. If ground failure maps are not provided, damage estimates to these components will not be computed.

Tables 7-9 provide information on the damage to the utility lifeline systems. Table 7 provides damage to the utility system facilities. Table 8 provides estimates on the number of leaks and breaks by the pipelines of the utility systems. For electric power and potable water, Hazus performs a simplified system performance analysis. Table 9 provides a summary of the system performance information.

Table 7 : Expected Utility System Facility Damage

	# of Locations							
System	Total #	With at Least	With Complete	with Function	with Functionality > 50 %			
		Moderate Damage	Damage	After Day 1	After Day 7			
Potable Water	0	0	0	0	0			
Waste Water	0	0	0	0	0			
Natural Gas	0	0	0	0	0			
Oil Systems	0	0	0	0	0			
Electrical Power	0	0	0	0	0			
Communication	0	0	0	0	0			

Table 8 : Expected Utility System Pipeline Damage (Site Specific)

System	Total Pipelines Length (kms)	Number of Leaks	Number of Breaks
Potable Water	111	1	0
Waste Water	67	0	0
Natural Gas	44	0	0
Oil	0	0	0

Table 9: Expected Potable Water and Electric Power System Performance

	Total # of		Number of Households without Service					
	Households	At Day 1	At Day 3	At Day 7	At Day 30	At Day 90		
Potable Water	1,343	0	0	0	0	0		
Electric Power		0	0	0	0	0		

# **Induced Earthquake Damage**

## Fire Following Earthquake

Fires often occur after an earthquake. Because of the number of fires and the lack of water to fight the fires, they can often burn out of control. Hazus uses a Monte Carlo simulation model to estimate the number of ignitions and the amount of burnt area. For this scenario, the model estimates that there will be 0 ignitions that will burn about 0.00 sq. mi 0.00 % of the region's total area.) The model also estimates that the fires will displace about 0 people and burn about 0 (millions of dollars) of building value.

## **Debris Generation**

Hazus estimates the amount of debris that will be generated by the earthquake. The model breaks the debris into two general categories: a) Brick/Wood and b) Reinforced Concrete/Steel. This distinction is made because of the different types of material handling equipment required to handle the debris.

The model estimates that a total of 0.00 million tons of debris will be generated. Of the total amount, Brick/Wood comprises 72.00% of the total, with the remainder being Reinforced Concrete/Steel. If the debris tonnage is converted to an estimated number of truckloads, it will require 0 truckloads (@25 tons/truck) to remove the debris generated by the earthquake.

# **Social Impact**

### **Shelter Requirement**

Hazus estimates the number of households that are expected to be displaced from their homes due to the earthquake and the number of displaced people that will require accommodations in temporary public shelters. The model estimates 0 households to be displaced due to the earthquake. Of these, 0 people (out of a total population of 3,350) will seek temporary shelter in public shelters.

# **Casualties**

Hazus estimates the number of people that will be injured and killed by the earthquake. The casualties are broken down into four (4) severity levels that describe the extent of the injuries. The levels are described as follows;

- · Severity Level 1: Injuries will require medical attention but hospitalization is not needed.
- · Severity Level 2: Injuries will require hospitalization but are not considered life-threatening
- · Severity Level 3: Injuries will require hospitalization and can become life threatening if not promptly treated.
- · Severity Level 4: Victims are killed by the earthquake.

The casualty estimates are provided for three (3) times of day: 2:00 AM, 2:00 PM and 5:00 PM. These times represent the periods of the day that different sectors of the community are at their peak occupancy loads. The 2:00 AM estimate considers that the residential occupancy load is maximum, the 2:00 PM estimate considers that the educational, commercial and industrial sector loads are maximum and 5:00 PM represents peak commute time.

Table 10 provides a summary of the casualties estimated for this earthquake

Table 10: Casualty Estimates

		Level 1	Level 2	Level 3	Level 4
2 AM	Commercial	0	0	0	0
	Commuting	0	0	0	0
	Educational	0	0	0	0
	Hotels	0	0	0	0
	Industrial	0	0	0	0
	Other-Residential	0	0	0	0
	Single Family	0	0	0	0
	Total	0	0	0	0
2 PM	Commercial	0	0	0	0
	Commuting	0	0	0	0
	Educational	0	0	0	0
	Hotels	0	0	0	0
	Industrial	0	0	0	0
	Other-Residential	0	0	0	0
	Single Family	0	0	0	0
	Total	0	0	0	0
5 PM	Commercial	0	0	0	0
	Commuting	0	0	0	0
	Educational	0	0	0	0
	Hotels	0	0	0	O
	Industrial	0	0	0	O
	Other-Residential	0	0	0	0
	Single Family	0	0	0	C
	Total	0	0	0	0

# **Economic Loss**

The total economic loss estimated for the earthquake is 0.54 (millions of dollars), which includes building and lifeline related losses based on the region's available inventory. The following three sections provide more detailed information about these losses.

## **Building-Related Losses**

The building losses are broken into two categories: direct building losses and business interruption losses. The direct building losses are the estimated costs to repair or replace the damage caused to the building and its contents. The business interruption losses are the losses associated with inability to operate a business because of the damage sustained during the earthquake. Business interruption losses also include the temporary living expenses for those people displaced from their homes because of the earthquake.

The total building-related losses were 0.51 (millions of dollars); 24 % of the estimated losses were related to the business interruption of the region. By far, the largest loss was sustained by the residential occupancies which made up over 48 % of the total loss. Table 11 below provides a summary of the losses associated with the building damage.

Table 11: Building-Related Economic Loss Estimates

(Millions of dollars)

Category	Area	Single Family	Other Residential	Commercial	Industrial	Others	Total
Income Los	ses						
	Wage	0.00	0.00	0.02	0.00	0.00	0.03
	Capital-Related	0.00	0.00	0.02	0.00	0.00	0.02
	Rental	0.00	0.01	0.01	0.00	0.00	0.03
	Relocation	0.01	0.01	0.02	0.00	0.00	0.05
	Subtotal	0.02	0.02	0.07	0.01	0.01	0.12
Capital Stoo	ck Losses						
	Structural	0.03	0.02	0.02	0.01	0.01	0.09
	Non_Structural	0.09	0.05	0.05	0.03	0.01	0.24
	Content	0.02	0.01	0.02	0.02	0.00	0.06
	Inventory	0.00	0.00	0.00	0.00	0.00	0.00
	Subtotal	0.14	0.08	0.09	0.06	0.02	0.39
	Total	0.15	0.10	0.17	0.06	0.03	0.51

# **Transportation and Utility Lifeline Losses**

For the transportation and utility lifeline systems, Hazus computes the direct repair cost for each component only. There are no losses computed by Hazus for business interruption due to lifeline outages. Tables 12 & 13 provide a detailed breakdown in the expected lifeline losses.

Hazus estimates the long-term economic impacts to the region for 15 years after the earthquake. The model quantifies this information in terms of income and employment changes within the region. Table 14 presents the results of the region for the given earthquake.

Table 12: Transportation System Economic Losses

(Millions of dollars)

System	Component	Inventory Value	Economic Loss	Loss Ratio (%)
Highway	Segments	159.48	\$0.00	0.00
	Bridges	78.51	\$0.02	0.02
	Tunnels	0.00	\$0.00	0.00
	Subtotal	238.00	0.00	
Railways	Segments	12.04	\$0.00	0.00
	Bridges	0.00	\$0.00	0.00
	Tunnels	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Subtotal	12.00	0.00	
Light Rail	Segments	0.00	\$0.00	0.00
	Bridges	0.00	\$0.00	0.00
	Tunnels	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Bus	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Ferry	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Port	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
Airport	Facilities	0.00	\$0.00	0.00
	Runways	0.00	\$0.00	0.00
	Subtotal	0.00	0.00	
	Total	250.00	0.00	

# Table 13: Utility System Economic Losses

(Millions of dollars)

System	Component	Inventory Value	Economic Loss	Loss Ratio (%)
Potable Water	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Distribution Lines	2.20	\$0.00	0.12
	Subtotal	2.22	\$0.00	
Waste Water	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Distribution Lines	1.30	\$0.00	0.10
	Subtotal	1.33	\$0.00	
Natural Gas	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Distribution Lines	0.90	\$0.00	0.06
	Subtotal	0.89	\$0.00	
Oil Systems	Pipelines	0.00	\$0.00	0.00
	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	\$0.00	
Electrical Power	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	\$0.00	
Communication	Facilities	0.00	\$0.00	0.00
	Subtotal	0.00	\$0.00	
	Total	4.45	\$0.00	

# Table 14. Indirect Economic Impact with outside aid (Employment as # of people and Income in millions of \$)

LOSS	Total	%

Litchfield,CT			

# **Appendix B: Regional Population and Building Value Data**

State	County Name	Population	Building Value (millions of dollars)			
			Residential	Non-Residential	Total	
Connecticut						
	Litchfield	3,350	219	110	329	
Total State		3,350	219	110	329	
Total Region		3,350	219	110	329	

APPENDIX F	
FEMA SNOW LOAD GUIDANCE	

# FEMA Snow Load Safety Guidance

FEMA

www.FEMA.gov

This flyer summarizes warning signs of overstress conditions during a snow event, key safety issues and risks a snow event poses to buildings, and what to do after a snow event.

# Warning Signs of Overstress Conditions during a Snow Event

Overstressed roofs typically display some warning signs. Wood and steel structures may show noticeable signs of excessive ceiling or roof sagging before failure. The following warning signs are common in wood, metal, and steel constructed buildings:

- Sagging ceiling tiles or boards, ceiling boards falling out of the ceiling grid, and/or sagging sprinkler lines and sprinkler heads
- Sprinkler heads deflecting below suspended ceilings
- · Popping, cracking, and creaking noises
- · Sagging roof members, including metal decking or plywood sheathing
- Bowing truss bottom chords or web members
- Doors and/or windows that can no longer be opened or closed
- Cracked or split wood members
- Cracks in walls or masonry
- Severe roof leaks
- Excessive accumulation of water at nondrainage locations on low slope roofs


Warning! If any of these warning signs are observed, the building should be promptly evacuated and a local building authority and/or a qualified design professional should be contacted to perform a detailed structural inspection.

# **Key Safety Issues and Risks**

Snow accumulation in excess of building design conditions can result in structural failure and possible collapse. Structural failure due to roof snow loads may be linked to several possible causes, including but not limited to the following:

- Unbalanced snow load from drifting and sliding snow.
   When snow accumulates at different depths in different locations on a roof, it results in high and concentrated snow loads that can potentially overload the roof structure.
- Rain-on-snow load. Heavy rainfall on top of snow may cause snow to melt and become further saturated, significantly increasing the load on the roof structure.
- Snow melt between snow events. If the roof drainage system is blocked, improperly designed or maintained, ice dams may form, which creates a concentrated load at the eaves and reduces the ability of sloped roofs

- to shed snow. On flat or low slope roof systems, snow melt may accumulate in low areas on roofs, creating a concentrated load.
- Roof geometry. Simple roofs with steep slopes shed snow most easily. Roofs with geometric irregularities and obstructions collect snow drifts in an unbalanced pattern. These roof geometries include flat roofs with parapets, stepped roofs, saw-tooth roofs, and roofs with obstructions such as equipment or chimneys.

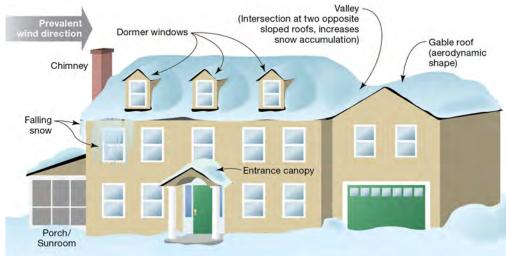

Unbalanced Snow Load from Drifting and Sliding Snow on Residential Structure
A-251

## What to Do After a Snow Event

After a snow event, snow removal may be in order. To determine whether snow removal is necessary, one may enlist valuable resources such as a local building authority and/or a qualified design professional, who will be familiar with the snow conditions of the region and the design capacities of local buildings per the building code. If it is determined that the snow should be removed, snow removal should only be performed by qualified individuals. The qualified individual should follow necessary protocols for safe snow removal to minimize risk of personal injury and lower the potential for damaging the roof covering during the snow removal process.

Warning! Snow removal is a dangerous activity that should only be done by qualified individuals following safety protocols to minimize risks. If at any time there is concern that snow loads may cause a collapse of the roof structure, cease all removal activity and evacuate the building.

If subsequent snow events are anticipated, removing snow from the roof will minimize the risk of accumulating snow causing structural damage. One benefit of immediate snow removal is that the effort required to remove the snow from the rooftop is reduced.

# **Safety Measures for Snow Removal**

Below are some safety measures to take during snow removal to minimize risk of personal injury.

- Any roof snow removal should be conducted following proper OSHA protocol for work on rooftops. Use roof fall arrest harnesses where applicable.
- Always have someone below the roof to keep foot traffic away from locations where falling snow or ice could cause injuries.
- Ensure someone confirms that the area below removal site is free of equipment that could be damaged by falling snow or ice.
- Whenever snow is being removed from a roof, be careful of dislodged icicles. An icicle falling from a short height can still cause damage or injury.
- When using a non-metallic snow rake, be aware that roof snow can slide at any moment. Keep a safe distance away from the eave to remain outside of the sliding range.
- Buried skylights pose a high risk to workers on a roof removing snow. Properly mark this hazard as well as other rooftop hazards.

## **Methods of Snow Removal**

Below are some recommended methods of snow removal that allow the qualified individual to remove snow safely and minimize risk of personal injury and property damage.

- Removing snow completely from a roof surface can result in serious damage to the roof covering and possibly lead to leaks and additional damage. At least a couple of inches of snow should be left on the roof.
- Do not use mechanical snow removal equipment. The risk of damaging the roof membrane or other rooftop items outweighs the advantage of speed.
- Do not use sharp tools, such as picks, to remove snow. Use plastic rather than metal shovels.
- Remove drifted snow first at building elevation changes, parapets, and around equipment.
- Once drifted snow has been removed, start remaining snow removal from the center portion of the roof.
- Remove snow in the direction of primary structural members. This will prevent unbalanced snow loading.
- Do not stockpile snow on the roof.
- Dispose of removed snow in designated areas on the ground.
- Keep snow away from building exits, fire escapes, drain downspouts, ventilation openings, and equipment.
- If possible, remove snow starting at the ridge and moving toward the eave for gable and sloped roofs.
- In some cases a long-handled non-metallic snow rake can be used from the ground, thereby reducing the risk. Metal snow rakes can damage roofing material and pose an electrocution risk and should be avoided.
- Upon completion of snow removal, the roofing material should be inspected for any signs of damage. Additionally, a quick inspection of the structural system may be prudent after particularly large snow events.

If you have any additional questions on this topic or other mitigation topics, contact the FEMA Building Science Helpline at FEMA-Buildingsciencehelp@fema.dhs.gov or 866-927-2104.

You may also subscribe to the FEMA Building Science e-mail list serve, which is updated with publication releases and FEMA Building Science activities.

Subscribe at https://public.govdelivery.com/accounts/ USDHSFEMA/subscriber/new?topic\_id=USDHSFEMA\_193

Visit the Building Science Branch of the Risk Reduction Division at FEMA's Federal Insurance and Mitigation Administration at http://www.fema.gov/building-science.

Please scan this QR code to visit the FEMA Building Science web page.

